

NORTH AMERICA 2024

Product Catalog

Comfortable Solutions for Homes & Businesses





Set Your Success In Motion

Expect more when you partner with the leader in motorized interior and exterior window covering systems. For over 50 years, Somfy® has designed and manufactured solutions for commercial and residential buildings in 58 countries across the globe. Our history of innovation, our wealth of support resources, our exclusive partnership programs, and our dedication to customer service have made Somfy the motor of choice worldwide. Leading shade manufacturers around the world rely on Somfy to set their products in motion and bring them to life.





Contents


Catalog

Somfy For You	5
Smart Home	21
Intelligent Buildings	43
Power & Network Technologies	59
Interior Applications	69
Outdoor Living	185
Controls & Sensors	271









Somfy For You

Somfy® is the motorization source that consistently delivers complete, simplified solutions that ensure end-user satisfaction. Partnering with Somfy enables manufacturers and dealers to increase efficiency and focus on growing their business.

The Power of Somfy	6
Somfy Technologies	9
Somfy in the USA & Canada	13
New Product Highlights	18



Rethinking products for a more sustainable future

Act for Green® is Somfy's voluntary initiative, which aims to reduce the environmental impact of products all along their life cycle: from the extraction of raw materials to end of life.

The Power of Somfy

We provide the right components and product solutions to work with any manufacturer, any fabric, any style, and any power system. Somfy products integrate seamlessly with most third-party control systems, for virtually unlimited flexibility. Our commitment to quality, continuous product innovation, and dedicated service and support have made Somfy the choice for thousands of manufacturers, dealers, installers, designers, and end users.



Somfy's Mission

For over 50 years, Somfy has been making life easier for millions of people around the world by providing intelligent home and building management solutions. Somfy innovates to automate and connect shades, blinds, draperies, awnings, rolling shutters, exterior screens, and pergolas by placing the end user at the heart of its concerns. Somfy is committed to creating reliable and sustainable solutions that promote the best way of living and well-being for all.

Make Your Sales More Dynamic

Take advantage of valuable Somfy information resources, training programs, marketing support, and point-of-sale material. Our regional representatives are at your call to help you offer your customers complete residential and commercial solutions. Working together, we aim to deliver mutual growth for both Somfy and your business.

Partnership Builds Greater Success

With Somfy by your side, you have all the support resources that you and your team need to elevate your business. Somfy will partner with you to customize solutions for any project and provide a host of helpful tools to simplify your work on-site. Our specialist teams provide step-by-step support, so you can complete the installation on-time and on-budget. Our service team can assist you in real-time by phone, text, or email if the need arises. The result: greater productivity, greater sales success, and greater business growth going forward.

Customer Satisfaction Is Our Priority

To ensure that your customers and your teams always get the logistics support they need, we offer a wide range of in-stock products and special-order products with short delivery periods. And we stand by our products with a longstanding commitment to customer satisfaction, as promised through our five-year limited warranty.

At Your Service

We are here to help you over the phone, via email or in-person at our offices during regular business hours. The SomfyPro website (www.somfypro.com) offers a vast assortment of product information, news, support tools, and answers to common questions.

Somfy By the Numbers

4

distribution centers across U.S. and Canada



L

years of warranty coverage on our motors



8

manufacturing plants around the world



50+

years of experience in the industry



products tested



2,281

patents in the Somfy portfolio



30 K

commercial clients worldwide



64K

sq. ft. state-of-the-art product testing facility



70 K

motors per day production capacity



10+/

connected devices

\$

200+M

motors produced so far, including 100+ million radio-control motors



270+M

users worldwide







Somfy Technologies

Somfy technology solutions are designed with simplicity in mind. Installed products powered by Somfy motorization offer quick and easy installation and seamless integration with home or building networks.

Technology Options

We offer a variety of advanced, easy-to-use, and easy-to-install motorized solutions with a solution to fit every end user — residential or commercial — no matter their needs or budget. Somfy motors are designed to fit the most common interior and exterior window treatment applications.

Wired Technology

The cost-effective standard solution. Typically used for applications requiring small to large torque ranges in new construction or retrofits where wiring can be run without difficulty.

Somfy Digital Network™ (SDN)

The precise solution where exact positioning is required. The motor's increment encoder measures the specific position and sends bidirectional communication to the controller.

Power-Over-Ethernet (PoE)

A low-voltage power distribution and network-connected solution that utilizes PoE (Power over Ethernet) technology to power and control shades and draperies.

Radio Technology Somfy® (RTS)

A good solution in existing construction where pulling wires is difficult, mainly used in residential and small buildings. Radio frequency transmitters and accessories control the RTS motors without the need for wired controls.

Zigbee® 3.0

Zigbee technology is a leading-edge solution that allows seamless connectivity and integration of various smart systems within the home, and simple control from a single source. It enables two-way communication, so users can send commands to their motorized devices and receive real-time status feedback. Somfy's Zigbee 3.0 products deliver a comfort-driven ecosystem, built for everyone.













Communication & Control Options

Somfy-powered solutions are available for all types of systems, offering flexible control based on user input, programmed settings, or present conditions.







TOUCH CONTROL Input provided via wall switches, touch screens, and handheld remote controls.

A range of touch control options available to fit aesthetic and functional preferences.





WEATHER/SUNLIGHT/WIND SENSORS

Automatically detect conditions and activate functions in real time.

TIMER SETTINGS User programs automatic actions based on time of day throughout the year.





APP & VOICE CONTROL Allows voiceactivated functionality using TaHoma®

AUTOMATED Can integrate with most automation and control systems or leverage building automation options from Somfy.

Power Options

Choose the power option that works best for your project.



EMBEDDED RECHARGEABLE BATTERY (LITHIUM-ION)



RECHARGEABLE **EXTERNAL BATTERY**



EXTERNAL



SOLAR CHARGING



PLUG-IN POWER



POWER OVER ETHERNET (POE)



WIRED (AC)



WIRED (DC)

Multiple Applications

With the widest range of strong, quiet motors for all types of residential and commercial applications, it's easy to find a solution!



ROLLER/SOLAR SHADES



ROMAN/WOVEN SHADES



SHEER SHADINGS



LAYERED/ZEBRA SHADES





CELLULAR/PLEATED SHADES



HORIZONTAL BLINDS



DRAPERIES/ CURTAINS



SKYLIGHTS



ROLLING SHUTTERS



PROJECTION



EXTERIOR SCREENS



AWNINGS




PERGOLAS



Over 50 Years of Somfy Innovation

Put our long history of product innovation to work for you. After all, who knows what tomorrow will bring?

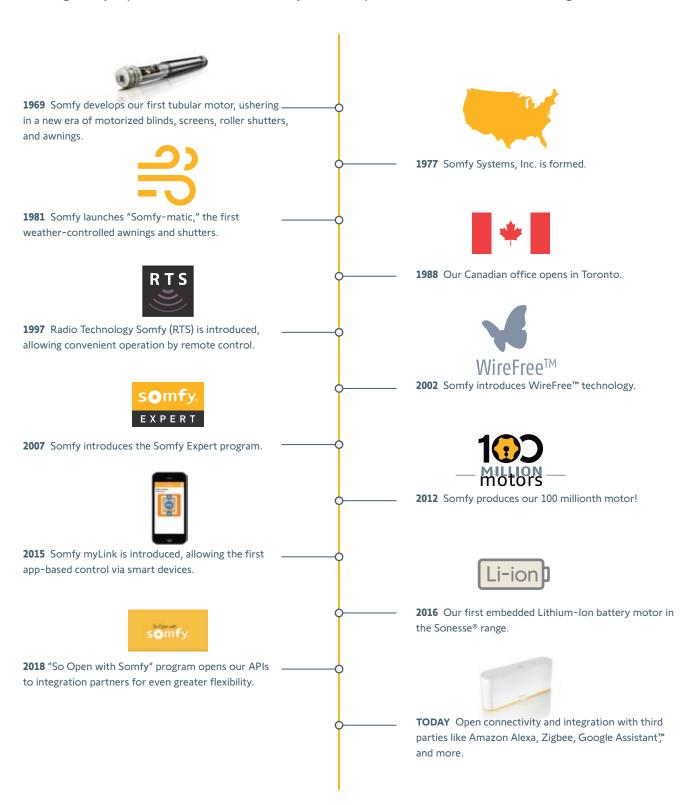



Somfy in the USA & Canada

OEMs, dealers and installers in North America can easily access Somfy's professional partnership programs, support tools, product information, and training to help provide complete solutions with greater efficiency and customer satisfaction.



The SomfyPro website serves a community of professionals who offer complete Somfy solutions with expertise and confidence. SomfyPro gives you access to product information, training resources, and tools to help you increase sales opportunities and deliver greater satisfaction for your clients.

SomfyPro puts a wealth of resources at your fingertips, anytime:


- Online Product Catalog and Document Library
- Product manuals, installation instructions, and sell sheets
- How-to videos
- Software/tools
- · Somfy news

SomfyPro also offers you the opportunity to interact with Somfy, including:

- Exclusive tools for Somfy Experts
- Access online ordering (for direct customers)
- Registration for training programs

The exclusive SomfyPro web shop enables you to order online from Somfy, 24 hours a day, even on weekends. It also lets you:

- Make a "Favorite" list for future ordering
- View your recent purchase history
- Compare products quickly and easily
- Upload large orders using a CSV file



Somfy Expert Dealer Program

The Somfy Expert program is an exclusive network of dealers who have made a commitment to their expertise in offering Somfy-powered solutions for their clients. As a certified Somfy Expert, you will have everything you need to improve customer satisfaction and grow your business to new heights. Enjoy free access to qualified consumer leads, effective sales tools, marketing support, quality training, and personalized service and support.



"We went from selling motorization only when customers asked about it to making it the centerpiece of our in-home consultations.

The results have been huge."

GLAMOUR DECORATINGSomfy Expert since 2015



Qualified Leads

Somfy's website, social media channels, organic search results, and consumer marketing campaigns generate high-quality leads every day. As a Somfy Expert, you can tap into these leads and connect with customers in your area who are interested in motorized window treatments.

Customers Find You

Somfy Experts are featured on our consumer site's Where to Buy dealer locator, the starting place for thousands of customers looking for motorized window treatments each month.

Professional Online Presence

Every Somfy Expert gets a customized profile page on SomfySystems.com, where you can share information about your company, your hours, project photos and videos, and more. Put your best foot forward!


Powerful Sales Tools

As a Somfy Expert, you will gain access to sales tools that help clients experience the convenience and elegance of Somfy. The immersive, interactive Somfy Showroom app makes it easy to demonstrate Somfy motorization using a tablet or laptop.







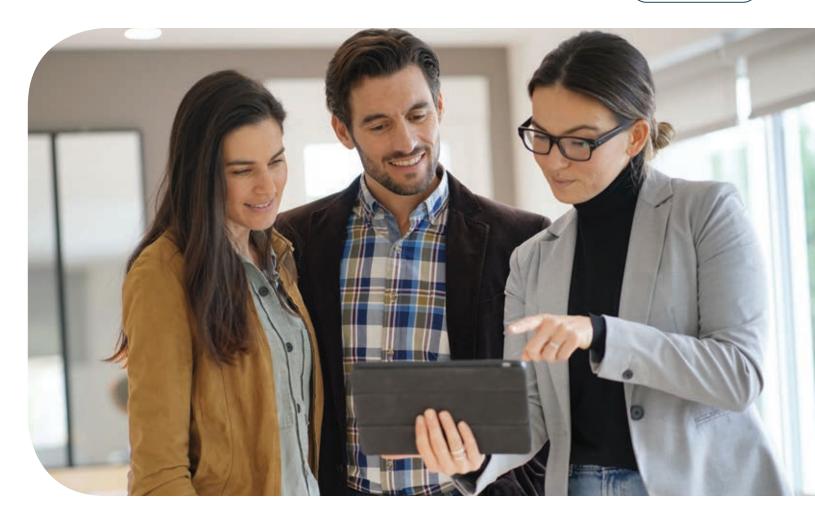

Concierge Service

Somfy Experts enjoy direct access to an account advisor for fast answers, expedited service, and ongoing support. You can also purchase controls, accessories, and parts directly from your Somfy account advisor, and take advantage of exclusive promotional offers.

Digital Marketing Support

Get the most from your digital and social marketing efforts with customized Somfy assets, including social post graphics, email content and templates, and a customized "benefits of motorization" landing page for your business website.

Training & eLearning


Learn and understand the various motorization and control systems available from Somfy with our exclusive online training resources through SomfyU. Visit www.somfypro.com/services-support/training, where your sales and support teams can stay up to speed as well. You can learn right from your computer, any hour of the day, from virtually anywhere.

BECOME A SOMFY EXPERT Simply go to www.somfypro.com/expert-program and register your company's information. Or, call your Somfy representative to find out how to qualify.









Comprehensive Somfy Support

Somfy offers a wealth of support resources, such as our exclusive SomfyPro website, to assist you with your project. From product documentation and spec sheets, to marketing support materials, project services consultations, and customized quotes, we are here to help.

Project Services Support

Ensuring a positive experience with Somfy-powered solutions is our goal. To help you succeed, our Project Services team provides support from the initial design phase to project completion.

Technical Support

Somfy provides a hotline with real-time consultation and support for your technical questions and challenges.

U.S. Tech Support

TechnicalSupport_us@somfy.com

Canada Tech Support

sctd@somfy.com

Training Support

Partner with Somfy Systems and learn the fundamentals of design, specification, and installation of Somfy's intelligent motor and control solutions. Training programs provide attendees with a competitive advantage and enable leadership in the automated shading industry.

Includes training on the following technologies:

- Zigbee (including TaHoma switch)
- Radio Technology Somfy® (RTS)
- Wired Technology
- Somfy Digital Network[™] (SDN)

Visit SomfyU for more information.

For details on each of these course offerings, including training session dates and registration information, please visit www.somfypro.com/services-support/training.


Point-of-Sale Materials (POS)

To promote Somfy in your showroom, Somfy has various POS materials for interior and exterior solutions to support your sales team:

- Brochures and product sheets
- Displays
- Signage

- Somfy Expert sign (exclusively for Experts)
- Flags

A national digital marketing campaign increases recognition of the Somfy brand, and your presence as a local Somfy dealer will help you stimulate sales in your area. To find out more, please visit www.somfypro.com/expert-program or contact your local Somfy account manager.

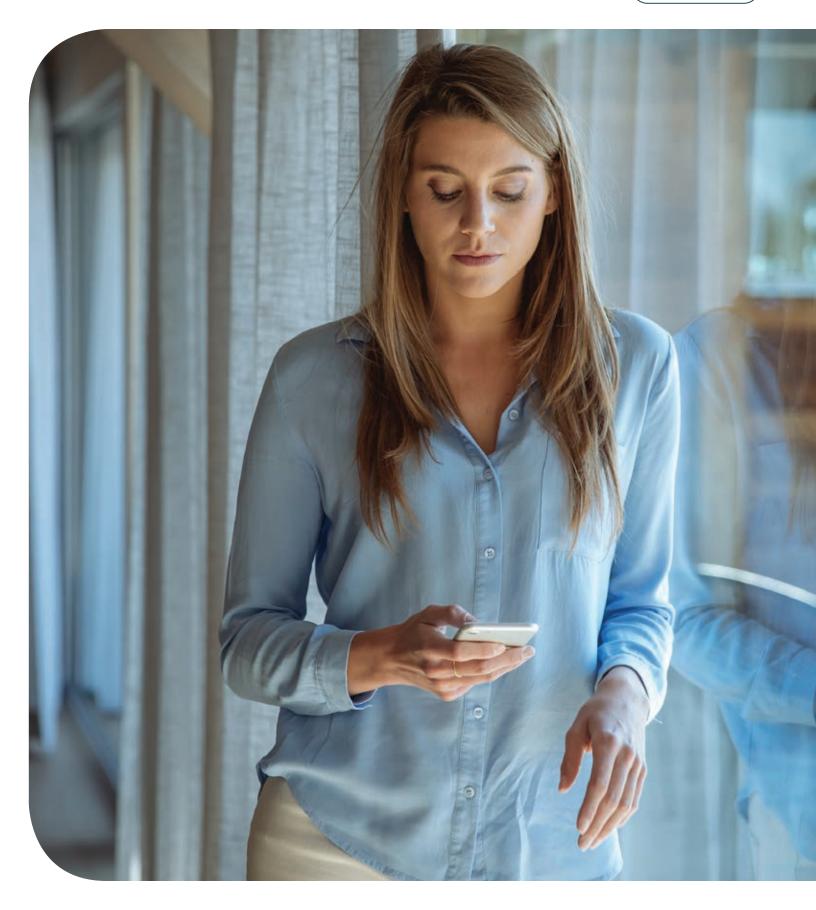

New Product Highlights



Take a massive leap forward comfortably

Introducing our new comfort-driven ecosystem, built for everyone. An ecosystem of smart shading products designed to simplify your customers' lives.

Some would say our business is motorization and automation. We would say it's comfort. Ever since we pioneered the industry over 50 years ago, the goal was to give people added convenience in their lives. But to be truly comfort-driven, we must extend this mission even further.

COMFORT is quality and ease in production, so the manufacturers that you buy from can build high-quality window coverings faster and to your exact specifications.

COMFORT is confidence that every installation you do can be done in less time, and will be done right the first time.

COMFORT is the peace of mind you give to homeowners that their smart shades, blinds, and draperies will work seamlessly with any future change in smart home tech.

With Somfy Smart Shading now on Zigbee® 3.0, comfort is the name of the game — from manufacturer to installer to end user. Somfy means comfort.



MOTORS

Sonesse® 40 Zigbee 404S2 with Fast Connector | #1245920

Sonesse® 40 Zigbee 406A2 with Fast Connector | #1245921

Sonesse® 40 Zigbee 409R2 with Fast Connector | #1245922

Sonesse® 40 WireFree Zigbee (Li-ion) | #1245993

Sonesse® ULTRA 30 WireFree Zigbee (Li-ion) | #1241752

Sonesse® 28 WireFree Zigbee (External Battery) | #1241754

Sonesse® 28 WireFree Zigbee (Li-ion) | #1241755

Cord Lift 25 WireFree™ Zigbee (External Battery) | #1241780

Tilt 50 WireFree™ Through-Shaft Zigbee (External Battery) | #1241783

Glydea® ULTRA 35 Zigbee

Glydea® ULTRA 35 Motor DCT with 10' plug | #1246115

Zigbee (2-way) Module | #9000043

Glydea® ULTRA 60 Zigbee

Glydea® ULTRA 60 Motor DCT with 10' plug | #1246117

Zigbee (2-way) Module | #9000043

Sonesse® 30 24V DC Zigbee | #1241970

CONTROLS

TaHoma® switch | #1871037
TaHoma® switch (with ethernet adaptor) | #1871038
Ysia 1 Zigbee | #1871153
Ysia 5 Zigbee | #1871154
Ysia 5 Variation Zigbee | #1871281

DecoFlex WireFree™ Zigbee, White (Surface Mount) 4 Channel | #1871576 2 Channel | #1871577 DecoFlex WireFree™ Zigbee, White (In-wall) 4 Channel | #1871572 2 Channel | #1871573 Smart Plug Zigbee | #1871217

New and streamlined. Meet our smart shading ecosystem featuring Zigbee 3.0 technology.

An ecosystem of smart shading products designed to simplify your customers' lives.



Somfy motors

Fitting most styles of interior shades, blinds, or draperies.

TaHoma® pro app

Simpler programming, motor setting, and installation.

TaHoma® switch

Smart hub for a solid, reliable network.

 ${\it Mobile screens are for illustrative purposes only}.$

TaHoma® app

Giving homeowners the ability to connect, control, and customize.

Ysia remote

For direct control of window coverings at the touch of a button.

Serv-e-Go

A web app for dealers to elevate after-sales support.



















Smart Home

Somfy® offers a variety of smart shading solutions designed to make life easier and more efficient in virtually any household. And Somfy's smart shading control systems are easy to integrate with other manufacturers, providing a seamless experience regardless of budget or need.

Smart Home Trends	22
Benefits of Smart Shading	26
Somfy Smart Home	28
Smart Shading by Somfy	30
Somfy Smart Home Integrations	34
Smart Solutions by Somfy	37

Smart Home Trends

Smart home technology allows various home systems to work in a more intelligent and interconnected way, from security monitoring and appliances to lighting and entertainment. What once seemed like futuristic science–fiction is rapidly becoming today's standard of operational convenience and end–user simplicity. According to a recent survey by the Consumer Technology Association (CTA),* nearly 70% of U.S. households own some form of smart home technology. Industry research reveals other emerging trends in consumer ownership, purchase intent, and motivation regarding smart home technologies and products.

A Large and Rapidly Growing Market

The United States leads all markets worldwide in terms of smart home penetration with an estimated 32.4% of total households in 2020, representing 41.3 million homes. The U.S. penetration rate is expected to exceed 50% by the year 2024 (sources: Ambient and Statista).





Sales of smart home products in the U.S. were estimated at over \$23.3 billion in 2020 and are expected to double that amount in 2025 (source: Statista). Leading the way in the anticipated growth of the smart home market are the key segments of "Control & Connectivity" and "Comfort & Lighting," both of which are integral to the Somfy product lineup.

ESTIMATED SALES GROWTH OF U.S. SMART HOME PRODUCTS





^{*}Source: https://www.cta.tech/Resources/i3-Magazine/i3-Issues/2020/January-February/The-Ringing-Future-of-Smart-Home-Technology







Smart Controls and Smart Speakers

One of the strongest trends currently driving growth in the smart home category is the move toward simplified control of integrated home systems through apps for smart phones and tablets, and through voice-activated control of virtual digital assistant platforms like Amazon Alexa or Google Assistant built into smart speaker devices. Somfy is on the leading edge of this trend with RTS-powered products that integrate easily with today's smart control systems like the innovative TaHoma® smart home hub.

System Standardization

Manufacturers of smart home products have recognized the need for unified standardization and integration, allowing different systems to work together with simple user control and automatic operation. Somfy has partnered with many of the leading consumer and professional brands to ensure that our motorized products are compatible with most third-party systems.

Natural Light Control

The recent trend toward work-from-home and school-at-home lifestyles has dramatically increased the number of hours many North American families spend inside their homes, and has sharpened the focus on wellness and comfort in the home environment. According to a 2020 study conducted by CE Pro, home systems integrators expect to nearly double their deployment of wellness-related technology within the year — and motorized shading with automatic timer control was named the single most popular wellness technology that dealers expect to deploy. Somfy smart shading systems optimize natural light, control glare, and provide a clear view of the outdoors during daylight hours.

What It All Means for You

There has never been a better time to offer Somfy motorized products as an essential element of any smart home upgrade. Consumers are becoming more and more acclimated to smart home technologies in home entertainment, home environment, and home security systems. As price trends in the market continue to make smart home solutions more attractive, and the industry is rapidly standardizing communication and control technologies, customers are now ready to embrace more opportunities to upgrade to smart systems throughout the home — and that includes window coverings.

Benefits of Smart Shading

Somfy's smart shading systems are designed to make life easier and more convenient for homeowners, enhance privacy and home security, improve overall home efficiency, and increase energy savings.

Convenience

Smart home systems allow users to operate multiple devices from multiple manufacturers at once, using a single control unit or smart app to control them all. Total automation is right at the user's fingertips. Smart programming automatically triggers various actions throughout the home based on time of day, current weather conditions, or even through a simple voice command.

Peace of Mind

With smart home technology, roller shades or curtains can open and close at preprogrammed times, and selected lights can turn on and off. These actions help create the impression that someone is at home to deter potential burglars and intruders even when the user is far away.

Privacy

There are times in everyone's life when privacy is crucial. Smart home technology provides users with one-touch simplicity to activate shades, blinds, drapes, shutters, and more... to keep private moments away from unwanted eyes.

Energy Efficiency

Homeowners can enjoy energy savings throughout the year with Somfy smart shading. Outside, awnings and rolling shutters help keep the heat out in summer and let in the sunshine in winter to help warm the home. Inside, blinds and shades can open and close throughout the day to provide optimal natural light and warmth, which will ultimately reduce lighting and heating/cooling costs.

Accessibility

Smart home technology makes it easier for end users with mobility issues to operate window coverings, lighting, entertainment, and other systems without the need to engage with those components directly. Shading systems linked to smart homes make it easy for people with limited mobility to operate blinds, shades, and other window coverings remotely with just a touch, with the natural simplicity of a voice command, or pre-programming them to operate automatically.






SMART HOME

Somfy Smart Home

Smart living begins with Somfy

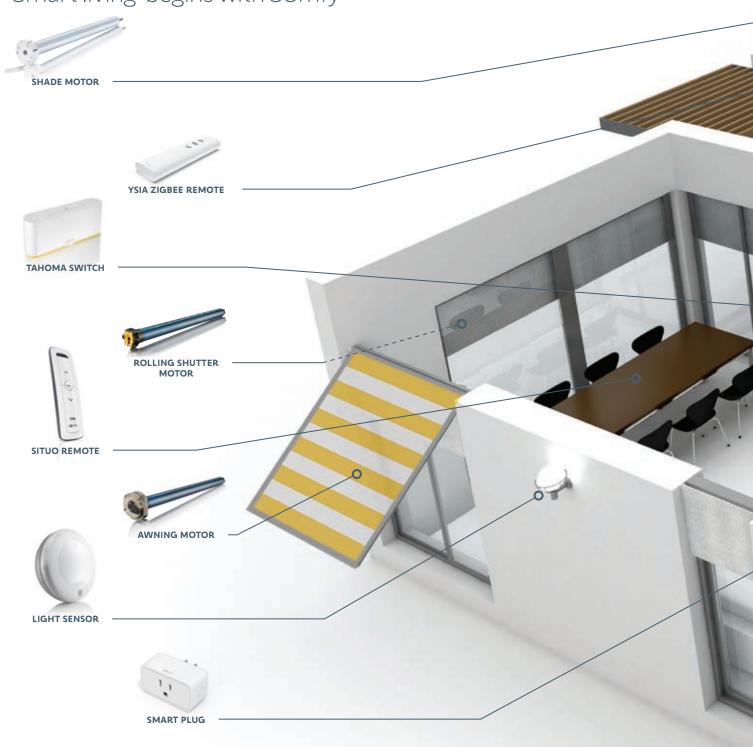



Smart Shading by Somfy



Somfy technology enhances and enriches the smart home experience, allowing end users to operate and monitor their connected systems in the home from virtually anywhere in the world. Smart shading by Somfy is smart home technology at its best: manual, voice, or automatic operation of powered devices from anywhere, at any time.

App Control

Somfy is an established leader in smart home technology in the window coverings industry and helped pioneer smart-device app control of shades and blinds by integrating with third-party systems years ago. The introduction of TaHoma in 2021 represents a great step forward, providing users with unified control of up to 40 RTS (Radio Technology Somfy®) channels with up to 40 schedules, and as many as 40 programmed scenes at a time — all with one simple app. Whether at home or away, users can control any motorized interior window covering or exterior pergola, screen, awning, or rolling shutter in the home with just a simple command.

Zigbee®: The Smart Choice Today and Tomorrow

TaHoma also supports Zigbee 3.0 technology, an open global standard for smart home communication and connectivity. Somfy has chosen the Zigbee protocol for our new smart shading product range for a number of smart reasons:

- An open, forward-looking protocol offers greater flexibility and ensures that certified products are compatible with one another in the future.
- It allows bi-directional communication, so not only can the end user send commands from anywhere they can also receive real-time feedback on equipment status and battery level to always know how their motorized product is positioned.
- Zigbee technology is reliable and can recover a network, extend radio range, avoid interference from other devices during installation and operation, optimize battery life, and offer a high level of security for the end user.
- Zigbee 3.0 creates its own smart ecosystem, enabling Somfy products to easily communicate with each other and allowing control from a single source.

Somfy is a Connectivity Standards Alliance board member, proud to be part of an industrial community recognized as the world leader for interoperable smart products. All Zigbee 3.0 products are cross-compatible and easily work together, including smart lighting, smart shades, security systems, and HVAC systems.







Smart Indoor Living

Somfy's smart shading solutions are an integral part of living a more comfortable and in-control life, today and in the future. RTS motorized solutions, controlled by a smart phone or tablet app or even by voice commands, provide instant activation of window coverings to suit the user's needs at any time. A more enjoyable indoor environment, enhanced privacy, greater energy efficiency, and UV protection are merely a simple gesture away.

All Somfy RTS solutions are designed for maximum operational compatibility. The TaHoma app provides easy integration with most third-party control systems. TaHoma works directly with Amazon Alexa and Google Assistant.

Somfy-powered smart solutions also enhance peace of mind even if the user is on a trip thousands of miles from home. One simple tap on their smart device can operate blinds, shades, curtains, screens, and rolling shutters to provide greater home security and energy savings. And with Zigbee-enabled solutions, end users can receive real-time confirmation that their requested action has been successfully completed. Homeowners will enjoy the comfort of technology that simply works.

Smart Outdoor Living

Throughout the United States and Canada, many homeowners are rediscovering the joys of outdoor living and entertaining. Consumers are spending more of their time outside the home on decks, patios, porches, and in pergolas and other outdoor areas. Somfy smart home solutions include options that help make outdoor life more comfortable, enjoyable, and relaxing.

Somfy offers motorized solutions for awnings, screens, and pergolas to help shade users from the elements when needed, or to retract when the conditions are perfect. Rolling shutters are also available, providing excellent shading, privacy, storm protection, and insulating properties. And just like their indoor window-covering cousins, all Somfy exterior RTS solutions can be set to operate by time of day or by light and temperature sensors.



Somfy is a proud member of the Connectivity Standards Alliance, an organization devoted to developing, certifying, and promoting IoT (Internet of Things) technology standards, including Zigbee.

Somfy Smart Home Integrations



Somfy's motorization products are designed and built to work and play well with others. We have partnered with many of the leading names in smart home technology and integration, including consumer platforms and brands as well as third-party professional brands. And as members of the Connectivity Standards Alliance board, Somfy is well-positioned to remain at the forefront of emerging smart home technologies for years to come.

Somfy's smart home partnerships will continue to expand and offer ever-greater levels of interconnected experience and efficiency for manufacturers, dealers, installers, and end users alike.




























Smart Speakers and Voice Commands

Somfy motorized products make it easy to integrate seamlessly with smart speakers and digital assistants with voice–recognition capability through the TaHoma app. This means end users can activate shades, blinds, screens, and awnings individually or in combination with other household systems like lights, thermostats, and more — all with just a few words.

EXAMPLE: SIMPLE COMMAND WITH GOOGLE ASSISTANT

Simply say "Hey Google" to wake up the assistant, then "lower my bedroom shades" to create instant privacy. It is that easy.











^{*}Apple Home compatibility is only supported for TaHoma switch used with select Zigbee technology motors. See motor specifications for details.



Smart Solutions by Somfy

For professional window-covering dealers and installers, Somfy offers smart shading solutions with extremely simple and seamless installation and setup, plus nearly effortless operation and intuitive control for the end user.

Smart Technology

TaHoma switch is a smart hub that connects Somfy RTS and Zigbee products inside and outside the home to a smartphone, tablet, or computer for remote monitoring and control from anywhere, anytime. It places unified control at the user's fingertips with an intuitive app for easy and immediate control of natural and artificial light in the home environment. And it integrates easily with other smart devices, control systems, and platforms for flexible management of multiple home functions.

Somfy's TaHoma-enabled systems provide everything you and your customers desire in a smart home solution:

- They are easy to install, easy to use, and easy to control.
- Wireless technology can be used in any home with an internet connection.
- Expandable solutions enable integrated control of more than just window coverings.
- Zigbee-compatible devices allow bi-directional communication, giving the user instant feedback of operating status.
- The Somfy "So Open" strategy ensures connectivity with multiple partner brands, now and in the future, through the power and flexibility of open-source development.

The TaHoma app allows end users to create scenes that operate multiple functions with a single click. For example: set a "Wake Up" scene that opens the roller shades, switches on selected lights, and plays a favorite music playlist all at the same time. Users can also program a schedule that opens or closes blinds at certain times of the day, or that automatically operates awnings and shades when certain temperature and weather conditions are detected.



TaHoma pro app

Hassle-free manufacturing and installation for smart shading. This is truly motion that will amaze.


As easy as 1, 2, 3 to manufacture



1. SCAN the QR code on the motor to establish a direct connection.



2. SET the upper and lower limits, rotation direction, and rotation speed*.



3. NAME the motor, check the battery level*, and set it to delivery mode.


Streamlined for dealers



SCAN a QR code for a direct connection to change individual blind settings in a snap.



REGISTER and set up the TaHoma switch with or without an internet connection.



ADD devices that include shades, remotes, and smart plugs.



CREATE SCENES and schedules to suit your clients' needs.

Serve Go simplifies after-sales service on your PC

An all-in-one remote monitoring and troubleshooting tool for the Somfy Zigbee ecosystem. Dealers can keep track of all connected installations, diagnose issues, and provide remote service to clients easier than ever! No need for in-person service requests that can cost valuable time.

Mobile screens are for illustrative purposes only.



Control



GIVE CUSTOMERS COMPLETE CONTROL WITH THE TAHOMA APP

The TaHoma app has been designed for homeowners with a new simple and modern interface, intuitive controls, and added functionality.

- Create customized scenes and schedules to set the mood with a touch of a button or a timed schedule.
- Control individual or groups of shades at home or remotely.
- Easily connect and control multiple smart home devices like lights.

Connected, adaptive, and secure



Simple connectivity for seamless installation

Somfy motors also feature Bluetooth, allowing for a direct connection with or without WiFi for programming installations.



End-to-end reliability for your bottom line

From installation to integrating more hardware down the line, Somfy keeps you moving smoothly with the most forward-looking tech to stay open to new smart home innovations.



Bi-directional communication for user comfort

Help your customers feel in control of their space with real-time status of all their window coverings and precise controls for their preferred position.









The Somfy comfort-driven ecosystem

Hard at work in any smart home



TaHoma switch

The central hub that connects and controls the smart home ecosystem — powering the TaHoma app for homeowners and giving them complete control, no matter their preferred smart home ecosystem.

TaHoma app

A single interface that connects the homeowner to their smart home, giving them full control over their window coverings and lighting — with real-time status views of every motor.

Somfy motors

Every Zigbee motor — wired or wireless — offers precise positioning adjustments and easily configured settings directly from the TaHoma app.







^{*}Apple Home compatibility is only supported for TaHoma switch used with select Zigbee technology motors. See motor specifications for details





A Smart Opportunity for You

Consumer demand for smart home solutions has increased significantly over the past four years, and smart home systems are now present in over 32% of North American households (Berg Insight, 2019).

There has never been a better time to offer smart shading solutions by Somfy to meet customer needs with innovative, efficient and reliable products that fit seamlessly into today's smart home designs.

- Versatile range of motors available for a wide variety of shade and curtain options
- Enhanced outdoor living options with motorized awnings, screens, and pergolas
- Sleek, discreet motor design with quiet operation
- Convenient control of home environment, temperature, light, and glare
- Improved efficiency and reduced energy consumption
- Easy installation and integration with existing smart home systems
- Remote access and monitoring via intuitive app from anywhere, anytime
- No hanging cords a safer solution for children and pets
- Peace of mind solutions backed by more than 50 years of Somfy innovation and leadership in the industry

As smart home technologies evolve and expand, Somfy will continue to offer advanced, intuitive solutions to specific smart home integration opportunities and challenges as they emerge. Today and tomorrow, Somfy is smart home-ready.





Intelligent Buildings

Somfy® offers intelligent, integrated solutions designed to save costs and enhance productivity in commercial workspaces by optimizing natural light, maximizing energy efficiency, and improving end-user comfort throughout the year in all climates.

Better Building Performance:Inside and Out	44
ntelligent Building Partners	48
ntelligent Control Solutions	50

Better Building Performance: Inside and Out

Somfy provides designers, builders, and building management professionals with flexible exterior and interior shading solutions that adjust to seasonal elements and easily integrate with a building's lighting, heating, and ventilation systems. Somfy's natural light control automation systems are scalable in design, offered in low voltage, line voltage, or wirefree options, and are perfect for projects of any size or budget.

Increased Well-Being and Comfort

Automated shading systems contribute to meeting two important objectives: maintaining comfortable indoor temperatures for a longer period of time and enabling continuous glare control. The amount of natural light that people have access to is a major influence on temperature regulation, and therefore thermal comfort. Natural light also provides visual comfort, which is essential when performing certain tasks and activities. Automated and intelligently controlled solar shading optimizes natural light, preserving the full spectrum of daylight and diffused light as required.

Energy Savings Meet LEED Requirements

Somfy's innovative, automated solar shading solutions create optimal conditions for greater efficiency. This enables building owners to earn credits toward LEED certification on new construction and renovation projects.







Natural Light Management

Artificial lighting systems account for a significant portion of a building's total electricity consumption and energy costs. Automatic window coverings help reduce this cost by allowing ideal levels of natural light into the inside environment while controlling glare and providing a clear view of the outdoors during daytime hours.

Greater Energy Efficiency


Controlling energy costs in commercial buildings has never been more important. Somfy Intelligent Building solutions promote the use of natural light to help manage indoor comfort through the use of automated solar shading. Integrating these systems with artificial lighting controls increases energy savings by dimming artificial light during the day. Further energy savings can be realized due to lower solar gain in cooling months, which reduces demand on HVAC systems.

Add Value to Building Investment

In addition to enhancing occupant comfort, ongoing reduction of energy costs can help offset the cost of the initial investment for integrated automated shading. Automated shading systems also reduce the handling (and possible mishandling) of shading devices by the building's occupants, extending the life of the shading devices and lowering maintenance costs. Automatic shade devices can also boost security by blocking the view of contents inside when the building is unoccupied, reducing the risk of theft and vandalism.


Scalable Solutions

From single or multiple rooms or floors to an entire building, Somfy's animeo® IP installations are suitable for a wide variety of applications. They provide the flexibility to expand and meet the needs of projects of all sizes and types.



SINGLE ROOM OR SINGLE FLOOR

Automate up to hundreds of motorized shades at a time based on outdoor conditions, or programmed for time-scheduled events, utilizing Somfy Digital Network™ (SDN) technology or Somfy animeo IB+.



MULTIPLE FLOORS OR WHOLE BUILDING

For larger installations, Somfy animeo IP system components easily expand system capacity.

40%

Buildings are responsible for 40% of global energy consumption and 33% of greenhouse gas emissions.¹

38%

HVAC accounts for 38% of a building's energy consumption.²

30%

Well-designed control systems can increase building efficiency up to 30% without the need to upgrade existing appliances.³

35%

In test cases, applying automated shading, daylight harvesting,
LED lighting, and advanced lighting controls resulted in lighting energy savings between 35% and 42%.4

World Economic Forum Why buildings are the foundation of an energy-efficient future / Feb 22, 2021 | 3 Science Direct / Elsevier Energy Reports / November 2022 | 3 U.S. Department of Energy / Quadrennial Technology Review September 2015 | 4 New Buildings Institute / Getting Control of Comfort and Energy: The Benefits of Upgrading to Automated Shades and Advanced Lighting in Commercial Buildings / May 2021

Intelligent Building Partners

Somfy is proud of our robust network of integration partners, collaborating to develop expanded automation solutions for our commercial building customers, today and in the future.

Molex

As a leading provider of electronic components and solutions, Molex views innovation as a tool for solving complex customer challenges. Somfy is integrated into the Molex CoreSync EcoSystem Alliance, powering automated shading solutions for commercial spaces via Power-Over-Ethernet (PoE) technology.

Cisco

Cisco is the worldwide technology leader making the Internet work since 1984. Together, Somfy and Cisco power smart projects that improve building performance and occupant comfort. Cisco's people, products, and partnerships help companies in a variety of industries to securely connect and seize tomorrow's digital opportunities today.

Schneider Electric

Schneider Electric is leading the digital transformation of energy management and automation around the globe. Somfy and Schneider Electric are partners in creating a Connectivity Ecosystem for homes, mid-size buildings, and hotels.

Other Vital Partnerships

Our network of partners in intelligent building systems, networked lighting control, and building automation continues to expand every year.











Intelligent Control Solutions

Somfy offers intelligent motorization solutions that are compatible with most buildings' existing control system technologies — including Network/PoE systems, digital technology, and wired building controls. Choose the right solution that suits your needs; Somfy's Commercial Specification Team will work with you and support your project every step of the way.

Flexibility with a Variety of Building Types

Somfy has experience designing dynamic control solutions based on the unique requirements of virtually any building type, including new and retrofit applications. We are passionate about creating solutions that ensure the best possible working and living conditions.



IT Networking/PoE Technology

Power over Ethernet (PoE) distributes network signals and electrical power to transmit communication over standard low-voltage category cabling to various endpoints including shades, draperies, lighting, HVAC controls, and other networked devices in new or existing projects.

Using PoE technology for shading systems provides a host of advantages and capabilities:

- Delivers both data and power over Cat5e/Cat6 Ethernet cable
- Reduces costs by eliminating the need for AC power infrastructure
- Lowers requirements and dependence on certified electricians for installation
- Decreases cabling costs compared to typical line voltage or specialized low-voltage cable
- Facilitates installation in remote locations

Somfy Motor and Controls Compatibility

MOTOR TYPE	IT NETWORKING POWER OVER ETHERNET	3 DIGITAL TECH	INOLOGY O	PTIONS ANIMEO	WIRED WIRED	TECHNOLOGY DRY CONTACT
SONESSE 30 RS485 DC	X		X	X		
SONESSE ULTRA 50 RS485 DC	X		X	X		
IRISMO 35 RS485	x		х			
GLYDEA ULTRA 35 SDN			X			
GLYDEA ULTRA 60 SDN			X			
SONESSE 40 RS485 AC (NEW)			X	X		
SONESSE ULTRA 50 RS485 AC			X	x		
SONESSE 50 RS485 AC			X	X		
LT50 RS485 AC			X	x		
R28 WT		X			X	
SONESSE 40 WT		х			x	
SONESSE 50 WT		х			х	
LS40 WT		x			х	
LT50 WT		x			X	
LT60 WT					X	
SONESSE 30 DCT						x
IRISMO 35 DCT						X





Somfy Digital Network (SDN)

The Somfy Digital Network operates as either a stand-alone option or included in animeo IP systems. SDN components are integrated into a system designed to operate a broad range of products, including roller shades, over a standard RS485 network. Bi-directional communication allows status feedback from each motor on the network in real time. SDN utilizes a bus network architecture so you can establish a remote connection to the system from most locations throughout the building.

A stand-alone SDN scalable shading system, without a system-wide master controller, provides powerful yet economical building solutions:

- Manage unique addresses for each intelligent motor.
- Operate AC line voltage motors and DC low voltage motors on a single intelligent network with no gateway devices required.
- Manufacturers can pre-set upper and lower motor limits, adjustable on-site via handheld device.
- Configure and manage controllers, schedules, and motor groupings from any point in the system's wiring network.
- Each motor automatically aligns itself to a referenced shade position upon receiving a command from the network.

Somfy's energy-saving digital control systems provide optimal control of window coverings based on weather input from sensors, pre-programmed settings, or local user control.



Lowered coverings help prevent heat loss on cooler days during nighttime hours.



Lower window coverings during the warmest part of the day to reduce heat gain.





Digital Technology: animeo IP

Somfy's animeo IP portfolio consists of intelligent building controls, motor controls, local controls, and a full array of sensors and accessories. This complete range of proven solutions ensures maximum functionality and flexibility, as well as a simple installation process. Moreover, our products are naturally compatible with each other to ensure interoperability. Our intelligent solutions to automatically control solar shading will enhance occupants' comfort and well-being while improving the building's energy efficiency:


- Advanced scheduling with the timed-events feature ensures the building is running as efficiently as possible during periods of high occupancy or low occupancy.
- The right balance of wall-mounted keypads, wireless controls, and virtual keypads provides occupants with versatile control over nearby window coverings.
- Sun tracking automates natural light management based on the sun's position and façade direction to minimize glare and maximize effective daylight.
- animeo IP/RS485 technology provides bi-directional status reporting of window covering positions, allowing easy, at-a-glance system status snapshots.
- Intuitive user interface allows simplified commissioning, building management, and technical support with drag-and-drop zone creation and motor discovery.
- Solar Entrance Depth Management adjusts shade height through the day to protect furnishings, maximize daylight, and minimize glare.

Digital Technology: Touch Building Controller

The animeo IB+ Touch Building Controller (Touch Buco™) provides simple, intuitive touch-screen control over a building's shading systems. It is designed for easy, reliable use in small-to-medium commercial buildings, providing a flexible solution that is ideal for single-tenant or multi-tenant offices.

- Up to eight individually configurable zones allowing control of blinds, screens, rolling shutters, and more
- Suitable for use with a variety of interior and exterior window coverings
- Four selectable control modes from fully automated to occupant control
- Sun tracking control, for optimal visual comfort and energy-saving performance throughout the day
- Retrieval and display of up to three months of data (events, settings, sensors, etc.)
- Compatibilty with all animeo IB+ motor controllers and two-wire IB+ bus technology
- Easy, unique allocation of motors and façades with fast software upgrades
- Ready to fit and ready to work: less cabling, quick handling, and equipment that adapts to a changing environment



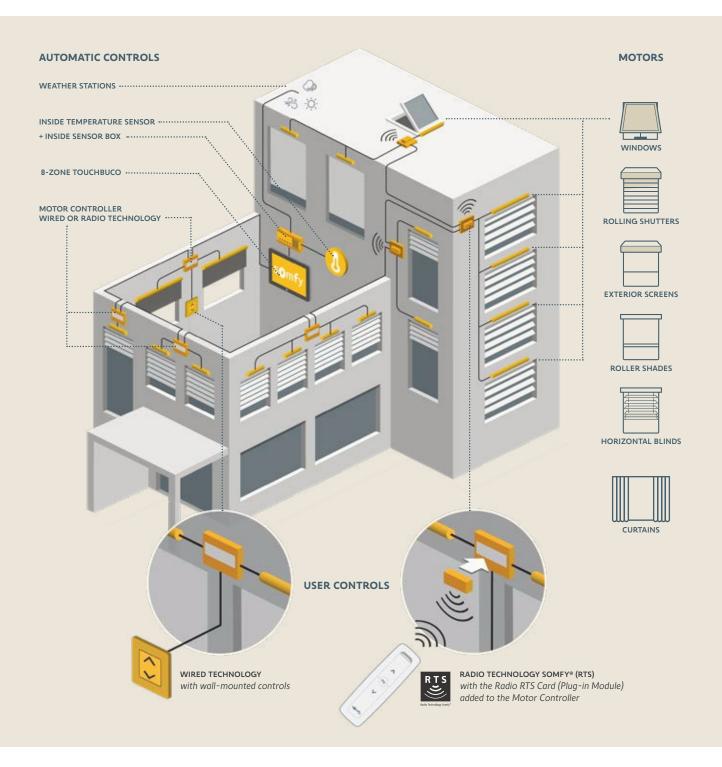

INTELLIGENT BUILDINGS

Wired Technology (WT) Building Control Systems

Standard wired technology controls offer a time-tested and cost-effective solution for many building applications. In new construction or renovations, WT solutions provide simple and reliable control for installations that require less sophisticated management solutions.

A variety of individual control options utilizing DCT or wired switches are available. The common motor options available for wired technology are durable, dependable, and feature a wide variety of torques and speeds for interior or exterior motorized shading applications.

The Somfy Individual Group Control (IGC) 4n1 Motor Controller is a scalable wired device allowing individual and group control for up to four Somfy® Wired Technology (WT) motors.

- Up to three intermediate positions per motor, preset at 25%, 50%, and 75% openness
- Custom intermediate positions set by user with a DecoFlex Dry Contact Keypad (1811402)
- Synchronized control, from a single keypad, of multiple IGC 4n1 Motor Controllers daisy-chained together
- Four keypad ports and two master ports











Power & Network Technologies

Somfy's power supply and networking equipment keeps your projects on the leading edge of innovative technology and cost-saving efficiency. Somfy® continues to improve and evolve with the constant development of new products and technologies to meet the demands of a changing market.

Somfy Digital Network Components 61

Power Over Ethernet (PoE) 66



Somfy Digital Network Components

The Somfy Digital Network (SDN) is the latest generation of busline-enabled intelligent components, integrated into a cost-effective, scalable system to operate blinds, shades, solar screens, projection screens, and other end products over a standard network.

Bi-directional communication provides feedback from each motor on the network, allowing the system to view the position and status of any motor in real time. The SDN network runs over standard network architecture, allowing users to connect to the system from anywhere with internet access.



Data Hub

The Data Hub is a Somfy Digital Network (SDN) bus distribution component which adds five device ports to an SDN bus line. The device ports support wire stubs with a maximum length of 200 feet.



Data Panel

Somfy Data Panel is a bus distribution component used to start or grow a Somfy Digital Network (SDN) system. This device adds four isolated bus segments to an SDN system. Each isolated bus segment output supports up to 255 devices, a maximum of 4,000 ft. of bus wiring per segment, and supplies as many as 100 power units. The in-wall or on-wall mountable enclosure offers separated line and low voltage areas for ease of installation.

SDN Keypads

DecoFlex™ Digital Keypads for the Somfy Digital Network (SDN) are intelligent, intuitive control devices that provide a hard-wired, in-wall user interface for stand-alone SDN shading systems. Keypads provide users with a familiar way to adjust their environment for personal comfort. Commission SDN keypads using Set pro by Somfy software for higher productivity and streamlined operations even before setting foot on-site.

Somfy animeo® IP Components

Somfy's animeo IP is an automation system for natural light management utilizing Somfy intelligent motorized window coverings, as well as digital keypads and weather sensors. The system's controllers, sensors, and keypads provide automation to new and existing SDN installations, enabling comprehensive solar management as either a stand-alone solution or with third-party control systems. Its intuitive user interface allows for simplified commissioning, building management, and technical support featuring drag-and-drop programming, motor auto discovery, and at-a-glance real-time system status updates.

Somfy animeo® Keypads

Somfy DecoFlex Keypads provide a simple in-wall user interface for animeo IP systems. The keypad offers users a familiar way to adjust their environment for personal comfort without affecting the overall efficiency of the building.



An intuitive setup that guides you effortlessly through the configuration of Somfy Digital Network™ (SDN) motorized shades, keypads, and the RTS receiver.









BUILDING CONTROLLER The animeo IP Building Controller features a sophisticated graphical user interface and built-in software applications for managing scheduled events, sun tracking, and virtual web-based keypads. An animeo IP Building Controller is required for every animeo IP installation. For larger animeo IP systems (over 200 motors), animeo IP Sub Controllers must be used.

SUB CONTROLLER The animeo IP Sub Controller expands the system's capacity beyond the initial 200 motors supported by the animeo IP Building Controller. Each additional Sub Controller supports 200 motors.

SENSOR SYSTEMS Somfy animeo IP sensors deliver data on current conditions to the Building Controller in real time, including temperature, light intensity, wind, and weather variables. This allows natural light management systems to react and adjust automatically as conditions change.



Power Over Ethernet (PoE)

Power over Ethernet (PoE) distributes electrical power and communicates data over a single low-voltage cable to shades, draperies, LED lighting, HVAC controls, and other networked devices utilizing the building network as a communications backbone. PoE reduces costs and saves time in new or existing projects by eliminating the need for AC or DC power supplies, and by reducing dependence on electricians or installation.

Sonesse® 40 PoE

The ultra-quiet, more powerful Sonesse 40 PoE allows motorization for shades as large as 13 ft. x 13 ft. Its direct integration to third-party control systems via the Somfy Synergy™ API eliminates the need for additional hardware.

Sonesse® 30 PoE

The Sonesse 30 PoE meets the IEEE 802.3 at standard and is directly powered by any 30W PoE switch that meets this standard. No charging or eventual replacement of batteries required.

PoE Gateway

A key component of Somfy's Power over Ethernet network is the SDN PoE Gateway. The PoE Gateway component can power and control up to four separate motors with a single module and facilitate expansion of PoE technology to power and control shades and draperies — even across longer distances and to hard-to-reach spots.

The PoE Gateway is compatible with the following Somfy motor systems:

- Sonesse® 30 RS485 DC
- Sonesse 50 ULTRA DC RS485
- Irismo™ 35 Mini DC













Interior Applications

For new home applications and retrofit opportunities alike, Somfy® offers smart, simple, easy-to-use natural-light management solutions to suit every project and any end-user need. Each is designed to fit comfortably within virtually any living environment to enhance interior comfort, convenience, and safety year-round.

Smart Technologies	70
Shade & Blind Motors	73
Shade & Blind Accessories	113
Drapery Motors	171
Drapery Accessories	177

Smart Technologies

Somfy-powered shades, blinds, draperies, and screen systems integrate easily with the latest smart home technologies, allowing simple and intuitive control of indoor shading via voice commands or smart device app. Advanced smart control systems, such as TaHoma®, make it easy to program routine actions based on time of day or current light and temperature conditions. Users are able to create scenes that operate multiple functions with one command — such as a "Wake Up" scene that opens roller shades, switches on lights, and plays a music playlist on a smart speaker all at once. They can also program a simple schedule that opens or closes blinds at certain times of the day automatically.

Motorized Blinds, Shades, and Draperies

Now more than ever, people are re-discovering the art of living well at home. Somfy-powered indoor natural-light management products are designed to enhance the lifestyle and enjoyment of the user within their home environment anytime.

CONTROL NATURAL LIGHT Motorized blinds, shades, and draperies allow more than just convenience. Somfy's custom-made solutions provide the ability to play with light and space within a room to create a mood with one-touch simplicity.

DO NOT DISTURB Our latest lineup of motors for indoor applications are designed for quiet operation when opening and closing. End users can enjoy the silence with fewer distractions.

ENERGY EFFICIENCY Somfy motorized solutions make it easy to reduce energy costs by keeping out the light and heat on the warmest days, and allowing in sunlight and warmth on chilly days.

POWER SOURCE FLEXIBILITY Somfy makes motorized light-management solutions come to life with a choice of power supply options, including the plug-in convenience of AC current, the efficiency of low-voltage DC current, and the flexibility of wirefree™ technology.

RELIABILITY AND PEACE OF MIND Somfy motors are backed by a full five-year warranty.







NOTES

Shade & Blind Motors



Designed for Silence Sonesse offers whisper-quiet operation for those "do not disturb" moments.



Privacy Just a quick touch easily creates a secluded retreat from the outside world.



Power Options Wired and wirefree, there's a Somfy motor to fit any project.



Smart Home Intelligent control systems for convenient, smart home management.



Energy Efficiency Automated control of natural light enables end-users to realize energy savings in all seasons.



Technologies Innovative technologies provide a range of options to meet the most demanding situations.

Sonesse® 40 AC Motors

Zigbee®

Sonesse 40 Zigbee is an easy, smart, robust & quiet solution to integrate into all types of interior shading.

Easy installation

- Seamless integration to match any interior decor
- Thin round head for smooth transition into shade and tube profile
- Interchangeable head color (white, black, and grey) to match fabric and hardware style or color
- Recessed interchangeable metal adaptor plate compatible with all hardware systems
- Smaller light gap to minimize light leakage
- Fits small diameter tubes (suitable for an internal diameter of 38mm or more)
- Ideal for narrow windows to maximize viewable area
- UL listed to comply with local building codes and requirements

Easy integration

• Easily integrates with third-party control systems when used with TaHoma®

Easy programming and adjustment with TaHoma® pro

- Allows for quick and easy configuration of motors and operational settings to simplify the installation process
- Installation and programming done directly from the app: intuitive step-by-stop programming instructions
- Integrated button on the motor head allows for leaving the network and full reset
- LED feedback for easy troubleshooting
- Acts as a Zigbee® mesh network router to extend radio range

Maintenance

• Dedicated maintenance tool, Serv-e- Go

Sustainable

• Eco-designed motor with the Act for Green promise by Somfy that provides a PEP Ecopassport Environmental Product Declaration for LEED V4.1 credit

Reliability and services

- · Highly secure protocol
- Somfy quality and warranty

Main functions









Position feedback



Open protocol



Quick & easy settings







Tilting





Apple Home

















PROJECTION

ROMAN









somfy

Zigbee®

NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
SONESSE® 40 ZIGBEE 404S2 WITH FAST CONNECTOR	ROUND	4	36	120V AC 60HZ	0.79	20.24	1.64	ZIGBEE	1245920
SONESSE® 40 ZIGBEE 406A2 WITH FAST CONNECTOR	ROUND	6	24	120V AC 60HZ	1.00	21.46	1.64	ZIGBEE	1245921
SONESSE® 40 ZIGBEE 409R2 WITH FAST CONNECTOR	ROUND	9	14	120V AC 60HZ	1.00	21.46	1.64	ZIGBEE	1245922

Radio Technology Somfy® (RTS)

The Sonesse® 40 range is putting window coverings in motion with quiet precision. These motors are ideal for variety of interior window covering applications. Radio Technology Somfy® (RTS) allows wireless radio control of motorized applications via the RTS family of controls.

Quiet Operation

- Features 4 patent-pending designs that help to reduce motor operating sound.
- Brake, rotor, gearbox, and accessories all specially designed to absorb sources of

Wide Range of Solutions

- Compact 40mm design adapts easily to smaller shading hardware, requiring less mounting space.
- Compatible with Somfy's full range of RTS controls and accessories.

Simplified Fabrication and Installation

- Compatible with leading industry hardware solutions.
- Streamlined programming.

Universal Quick Connector

- · Molded in white to match connector and cable colors.
- For interior and exterior IP55 (diameter 40 & 50) motors, radio and wired.
- UL recognized for a safe, easy-to-use connection.
- Plug & play extensions (no electrician needed).
- Limited motor SKUs to effectively manage inventory.
- · Flexibility to manage extension lengths as needed.

Main functions



Medium sized blinds



Compatible with Variation



Quick & easy settings



Electronic end limits



Remote limit setting

Compatible end-products

MY function



NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
SONESSE® 40 RTS 404S2 RH WITHOUT FAST CONNECTOR	ROUND	4	36	120V AC 60HZ	0.95	20.47	9.84	RTS 433 MHZ	1001636
SONESSE® 40 RTS 404S2 RH WITH FAST CONNECTOR	ROUND	4	36	120V AC 60HZ	0.95	20.47	1.64	RTS 433 MHZ	1240380
SONESSE® 40 RTS 406A2 RH WITH FAST CONNECTOR	ROUND	6	24	120V AC 60HZ	0.95	21.69	1.64	RTS 433 MHZ	1240381
SONESSE® 40 RTS 409R2 RH WITH FAST CONNECTOR	ROUND	9	14	120V AC 60HZ	0.95	21.69	1.64	RTS 433 MHZ	1240382

Somfy Digital Network™ (SDN) RS485

This intelligent motor is dedicated to a wide range of interior window coverings and features a powerful lifting capacity within a smaller overall footprint to fit narrow window openings. Its flexibility fits many building types (education, health care, hospitality, offices, retail, transportation, leisure, and residential).

Easy integration

- Seamless integration to match any interior decor
- Thin round head for smooth transition into shade and tube profile
- Interchangeable head color (white, black, and grey) to match fabric, hardware style, and color
- Recessed interchangeable metal adaptor plate compatible with all hardware systems
- Smaller light gap to minimize light leakage
- Fits small diameter tubes (suitable for an internal diameter of 38mm or more)
- Ideal for small narrow windows to maximize viewable window area
- UL listed to comply with local building codes and requirements

Easy installation

- Offers intelligent two-way communication via the industry standard RS485 for compatibility with the Somfy Digital Network™ (SDN)
- Easily integrates with third-party control systems
- Intelligent motors that are controlled and monitored via SDN solutions and the animeo® IP total solar management system

Easy setting

- Programming button on motor head allows for push-button control
- · Visual feedback via integrated LED to confirm programming
- · LED feedback for easy troubleshooting
- Setup and commissioning via SDN RS485, a 2-way bus line for reliable hard-wired control and integration to third-party and building management systems

Sustainable

• Eco-designed motor with the Act for Green promise by Somfy that provides a PEP Ecopassport (Environmental Product Declaration) for LEED V4.1 credit

Main functions






Position feedback







Electronic end limits Advanced diagnostic



NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
SONESSE® 40 RS485 404S2 WITHOUT FAST CONNECTOR	ROUND	4	36	120V AC 60HZ	0.95	20.24	1.64	RS485	1240562
SONESSE® 40 RS485 406A2 WITHOUT FAST CONNECTOR	ROUND	6	24	120V AC 60HZ	0.95	21.46	1.64	RS485	1240563
SONESSE® 40 RS485 409R2 WITHOUT FAST CONNECTOR	ROUND	9	14	120V AC 60HZ	0.95	21.46	1.64	RS485	1240564











Standard Motors - Progressive Limit Adjustment







The Sonesse® 40 range is putting window coverings in motion with quiet precision. These motors are ideal for a variety of interior window covering applications.

Quiet Operation

- Features 4 patents pending design features that help to reduce motor operating
- The brake, rotor, gearbox and accessories are all specially designed to absorb sources of noise

Wide Range of Solutions

- Its compact 40mm design adapts easily to smaller shading hardware, therefore requiring less mounting space.
- Offers standard AC switching via simple wall switch or control module.
- Zero stand-by power consumption.

Simplified Fabrication and installation

- Compatible with leading industry hardware solutions.
- Simple mechanical limit setting via progressive setting screw means no need for laptop or specific electronic setting tool.


Universal Quick Connector

- · Molded in white to match connector and cable colors.
- For interior and exterior IP55 (diameter 40 & 50) motors, radio and wired.
- UL recognized for a safe, easy-to-use connection.
- Plug & play extensions (no electrician needed).
- Limited motor SKUs to effectively manage inventory.
- Flexibility to manage extension lengths as needed.

Main functions







NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
SONESSE® 40 WT 404S2 RH WITHOUT FAST CONNECTOR	ROUND	4	36	120V AC 60HZ	0.95	18.82	6.56	WIRED	1001553
SONESSE® 40 WT 404S2 RH WITH FAST CONNECTOR	ROUND	4	36	120V AC 60HZ	0.95	18.82	1.64	WIRED	1240377
SONESSE® 40 WT 406A2 RH WITH FAST CONNECTOR	ROUND	6	24	120V AC 60HZ	0.95	20.08	1.64	WIRED	1240378
SONESSE® 40 WT 409R2 RH WITH FAST CONNECTOR	ROUND	9	14	120V AC 60HZ	0.95	20.08	1.64	WIRED	1240379







LS40 Altus® AC Motors

Radio Technology Somfy® (RTS)

The LS40 Altus is a universal solution for exterior & interior applications.

Wide Range of Solutions

- Compact 40mm design adapts easily to smaller shading hardware, requiring less mounting space.
- Compatible with Somfy's full range of RTS controls and accessories.

Universal Quick Connector

- Molded in white to match connector and cable colors.
- For interior and exterior IP55 (diameter 40 & 50) motors, radio and wired.
- UL recognized for a safe, easy-to-use connection.
- Plug & play extensions (no electrician needed).
- Limited motor SKUs to effectively manage inventory.
- Flexibility to manage extension lengths as needed.

Main functions



Medium sized blinds



Quick & easy






Electronic end limits Remote limit setting MY function





Compatible with rain, sun, & wind sensors

Compatible end-products



NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
ALTUS® RTS 404S2 RH WITH FAST CONNECTOR	ROUND	4	36	120V AC 60HZ	0.90	20.47	1.64	RTS 433 MHZ	1240260



·) •







Sonesse® ULTRA 50 AC Motors

Radio Technology Somfy® (RTS)

Motorize a wide variety of window coverings to create the perfect environment, and enjoy the peace and serenity provided by the Sonesse® ULTRA. It offers exceptional lifting capacity so users can enjoy powerful operation in a quiet, relaxing setting.

ULTRA Powerful

- Superior torque of up to 6Nm allows the motor to be installed for almost any application on the market.
- Allows for a single Sonesse ULTRA to multi-band up to six shades.

ULTRA Quiet

- Packed with innovations and patented technologies that provide 6Nm of power and an acoustic performance of less than 38dBA.
- Most powerful and quietest motor on the market.

ULTRA Flexible

- Available for a variety of control systems, for all types of spatial configurations in commercial and residential buildings, and in both new and renovated projects.
- Radio Technology Somfy® (RTS) allows wireless radio control of motorized applications via the RTS family of controls.













Main functions

























NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
SONESSE® ULTRA 506A2 RTS	STAR	6	24	120V AC 60HZ	0.95	32.40	9.84	RTS 433 MHZ	1002562
SONESSE® ULTRA 506A2 RTS RH	ROUND	6	24	120V AC 60HZ	0.95	32.28	9.84	RTS 433 MHZ	1002564



Sonesse® ULTRA 50 AC Motors

Somfy Digital Network™ (SDN) RS485

Motorize a wide variety of window coverings to create the perfect environment, and enjoy the peace and serenity provided by the Sonesse® ULTRA. It offers exceptional lifting capacity so users can enjoy powerful operation in a quiet, relaxing setting.

ULTRA Powerful

- Superior torque of up to 6Nm allows the motor to be installed for almost any application on the market.
- Allows for a single Sonesse ULTRA to multi-band up to six shades.

ULTRA Quiet

- Packed with innovations and patented technologies that provide 6Nm of power and an acoustic performance of less than 38dBA.
- Most powerful and quietest motor on the market.

ULTRA Flexible


· Available for a variety of control systems, for all types of spatial configurations in commercial and residential buildings, and in both new and renovated projects.

Two-way Communication

- Offers intelligent two-way communication via the industry standard RS485 for compatibility with the Somfy Digital Network (SDN).
- Easily integrates with third-party control systems.
- Intelligent motors that are controlled and monitored via SDN solutions and the animeo® IP total solar management system.

Main functions














NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
SONESSE® ULTRA 506A2 RS485	STAR	6	24	120V AC 60HZ	0.95	33.58	9.84	RS485	1002566









Sonesse® ULTRA 50 AC Motors

Standard Motors - Rapid Limit Adjustment

Motorize a wide variety of window coverings to create the perfect environment, and enjoy the peace and serenity provided by the Sonesse® ULTRA. It offers exceptional lifting capacity so users can enjoy powerful operation in a quiet, relaxing setting.

ULTRA Powerful

- Superior torque of up to 6Nm allows the motor to be installed for almost any application on the market.
- Allows for a single Sonesse ULTRA to multi-band up to six shades.

ULTRA Quiet

- Packed with innovations and patented technologies that provide 6Nm of power and an acoustic performance of less than 38dBA.
- Most powerful and quietest motor on the market.

ULTRA Flexible

• Available for a variety of control systems, for all types of spatial configurations in commercial and residential buildings, and in both new and renovated projects.

More Features


- · Easily adjust limits using rapid push-buttons.
- No power consumption when motor is idle.
- · Star and round head options available.
- Standard control options include wired wall switches or switching controls.

Main functions



















CABLE RATED CURRENT HEAD TORQUE SPEED ITEM NAME INPUT VOLTAGE LENGTH **TECHNOLOGY** LENGTH (AMPS) NUMBER (INCHES) (FEET) SONESSE® ULTRA STAR 6 24 120V AC 60HZ 0.95 31.42 9.84 WIRED 1002558 506A2 SONESSE® ULTRA ROUND 24 120V AC 60HZ 0.95 31.30 9 84 WIRED 1002560 506A2 RH







Radio Technology Somfy® (RTS)

The Sonesse® 50 range puts window coverings in motion with quiet precision. It's an ideal choice for a variety of interior and exterior window covering applications. Radio Technology Somfy® (RTS) allows wireless radio control of motorized applications via the RTS family of controls.

Multiple Applications

• Interior, Exterior, Residential, Commercial, Integrated solutions.

Simple Installation & Setup


- · Compatible with leading industry hardware.
- · Can be mounted in the bracket six different ways.
- Features a "snap-on" style connection for roller tube adaptors.
- Interchangeable power cords, or a quick connector with extension options, provide multiple power cord lengths to meet installation demands.
- Radio Technology Somfy (RTS) provides wireless commands to eliminate control
- Limits easily set using a hand-held remote.
- Suitable for tubes diameter 47mm or more (internal diameter)

Wide Compatibility

- Compatible with Somfy's full range of RTS controls and accessories.
- Users can use natural voice and app commands to control motorized products by adding TaHoma.
- Easily integrates with third-party control systems.

Main functions








Electronic end limits Remote limit setting













NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
SONESSE® 506S2 RTS	STAR	6	32	120V AC 60HZ	1.20	26.22	9.84	RTS 433 MHZ	1001809
SONESSE® 510S2 RTS	STAR	10	32	120V AC 60HZ	1.67	26.22	9.84	RTS 433 MHZ	1001807
SONESSE® 506S2 RTS RH	ROUND	6	32	120V AC 60HZ	1.20	26.10	9.84	RTS 433 MHZ	1001806
SONESSE® 510S2 RTS RH	ROUND	10	32	120V AC 60HZ	1.67	26.10	9.84	RTS 433 MHZ	1001805













Somfy Digital Network™ (SDN) RS485

Offers an intelligent, two-way wired communication with all the benefits of the Sonesse® range.

Multiple Applications

• Interior, Exterior, Residential, Commercial, and Integrated network solutions.

Simple Installation & Setup

- Compatible with leading industry hardware.
- · Can be mounted in the bracket six different ways.
- Features a "snap-on" style connection for roller tube adaptors.
- Interchangeable power cords, or a quick connector with extension options, provide multiple power cord lengths to meet installation demands.
- Limits can be set using addressable network limit settings.
- Suitable for tubes diameter 47mm or more (internal diameter).

Wide Compatibility


- Compatible with intelligent RS485 technology used with our Somfy Digital Network (SDN).
- Easily integrates with third-party control systems.

Main functions









NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
SONESSE® 506S2 RS485	STAR	6	32	120V AC 60HZ	1.20	26.22	9.84	RS485	1002286
SONESSE® 510S2 RS485	STAR	10	32	120V AC 60HZ	1.66	27.01	9.84	RS485	1002287
113 103									





Standard Motors - Rapid Limit Adjustment

Experience all the benefits of the Sonesse® range for large multi-banded/coupled window covering applications.

Multiple Applications

• Interior, Exterior, Residential, and Commercial.

Simple Installation & Setup

- Compatible with leading industry hardware.
- · Can be mounted in the bracket six different ways.
- Features a "snap-on" style connection for roller tube adaptors.
- Interchangeable power cords, or a quick connector with extension options, provide multiple power cord lengths to meet installation demands.
- · Limits can be set using mechanical rapid adjustment.
- Suitable for tubes diameter 47mm or more (internal diameter).

Compatibility

- · Compatible with wired control options.
- Easily integrates with third-party control systems.
- No power consumption when motor is idle, a green solution.













Main functions





Rapid limit adjustments



Quick & easy settings















NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
SONESSE® 506S2	STAR	6	32	120V AC 60HZ	1.20	24.25	9.84	WIRED	1001814
SONESSE® 510S2	STAR	10	32	120V AC 60HZ	1.67	24.25	9.84	WIRED	1001813
SONESSE® 506S2 RH	ROUND	6	32	120V AC 60HZ	1.20	24.13	9.84	WIRED	1001812
SONESSE® 510S2 RH	ROUND	10	32	120V AC 60HZ	1.67	24.13	9.84	WIRED	1001810

Standard Motors - Progressive Limit Adjustment



Multiple Applications

• Interior, Exterior, Residential, and Commercial.

Simple Installation & Setup


- · Compatible with leading industry hardware.
- · Can be mounted in the bracket six different ways.
- Features a "snap-on" style connection for roller tube adaptors.
- Interchangeable power cords, or a quick connector with extension options, provide multiple power cord lengths to meet installation demands.
- Limits can be set using mechanical progressive adjustment.
- Power output upon reaching motor limit.
- Suitable for tubes diameter 47mm or more (internal diameter).

Compatibility

- · Compatible with wired control options.
- Easily integrates with third-party control systems.
- No power consumption when motor is idle, a green solution.

Main functions





NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
SONESSE® 506S2 PS	STAR	6	32	120V AC 60HZ	1.20	24.25	6.56	WIRED	1001800
SONESSE® 506S2 PA	STAR	6	32	120V AC 60HZ	1.20	24.25	0.39	WIRED	1001801
SONESSE® 510S2 PA	STAR	10	32	120V AC 60HZ	1.67	24.25	0.39	WIRED	1002323
SONESSE® 510S2 PS	STAR	10	32	120V AC 60HZ	1.67	24.25	6.56	WIRED	1002324













LT50 AC Motors

Somfy Digital Network™ (SDN) RS485

LT50 AC motors offer intelligent two-way communication.

Multiple Applications

• Internal, External, Residential, Commercial, and Integrated network solutions.

Simple Installation & Setup

- · Compatible with leading industry hardware .
- Can be mounted in the bracket six different ways.
- Features a "snap-on" style connection for roller tube adapters.
- Customizable power cord lengths based on installation requirements.
- Limits may be set using progressive screw adjustment buttons, a radio transmitter, or addressable network limit settings.

Easy Integration


- Suitable for tubes diameter 47mm or more (internal diameter)
- Removable cable

Wide Compatibility

- Compatible with the Somfy Digital Network (SDN)
- Easily integrates with third-party control systems

Main functions

ROLLER



SHADES



LAYERED

SHADES



SHEER HORIZONTALS











Electronic end limits Advanced diagnostic

CABLE MOTOR HEAD TORQUE SPEED RATED CURRENT NAME INPUT VOLTAGE TECHNOLOGY LENGTH LENGTH NUMBER (INCHES) (FEET) 515S2 RS485 STAR 15 38 120V AC 60HZ 1.80 9.84 RS485 1002427 26.89 535A2 RS485 STAR 35 20 120V AC 60HZ 2.10 26.89 9.84 RS485 1002288





Sonesse® 30 PoE Motor

Power over Ethernet (PoE)

The Sonesse® 30 PoE motor provides innovative control of motorized window treatments using Power over Ethernet, lowering costs and improving efficiency.

Easy integration

- Seamless integration to match any interior decor
- Thin round head for a smooth transition into the shade and tube profile
- Smaller light gap to minimize light leakage
- Interchangeable head color (black and grey) to match fabric, hardware style, and color
- Fits smaller diameter tubes (suitable for internal diameters of 31mm or more)
- Ideal for small, narrow windows to maximize viewable window area

Easy installation

- Single Cat-5e or higher ethernet cable carries power and data
- Ethernet network cabling that does not require a qualified electrician
- IEEE 802.3 at Type2 (30W) power requirement
- · Low voltage power for safe and easy wiring
- Up to 328 feet from the PoE switch to the motor

Easy setting

- Connect directly to the motor via a web GUI (no physical setting tool required)
- Somfy Synergy™ API inside which allows for direct integration to your favorite third-party control system without the need for additional hardware
- Open solution that works with certified driver partners
- Soft stop and soft start independently adjustable
- Adjustable speed, independently adjustable in each direction

Secure protocol

- Certificate + PIN code to secure TCP/TLS AES-128 encryption over UDP.
- Somfy Synergy™ API
- Manufacturer Usage Description (MUD) file available for secure network configurations

Main functions





Position feedback




Speed control



LED indicator



Soft start-stop



NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	TECHNOLOGY	ITEM NUMBER
SONESSE® 30 POE	ROUND	1.5	25	48V DC	0.38	18.88	POE	1241147











Sonesse® 40 PoE Motors

Power over Ethernet (PoE)

Power over Ethernet (PoE) innovates and simplifies the control of motorized window treatments with a single ethernet cable, lowering costs and improving efficiency.

Easy integration

- Seamless integration to match any interior decor
- Thin round head for a smooth transition into the shade and tube profile
- Smaller light gap to minimize light leakage
- Interchangeable head color (black and grey) to match fabric, hardware style, and
- Fits smaller diameter tubes (suitable for internal diameters of 38mm or more)
- Ideal for small, narrow windows to maximize viewable window area

Easy installation

- Single CAT-5e or higher ethernet cable carries power and data
- Ethernet network cabling that does not require a qualified electrician
- UL listed
- · Low voltage power for safe and easy wiring
- Up to 328 feet from the PoE switch to the motor

Easy setting

- Connect directly to the motor via a web GUI (no physical setting tool required)
- Direct integration to third-party control systems via the Somfy Synergy™ API eliminates the need for additional hardware
- Independently adjustable soft start and soft stop
- Each direction's speed independently adjustable

Secure protocol

- Certificate + PIN code to secure TCP/TLS
- AES-128 encryption over UDP
- Somfy Synergy™ API
- Manufacturer Usage Description (MUD) file available for secure network configurations

Main functions





Position feedback




Speed control



LED indicator



Soft start-stop



NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	TECHNOLOGY	ITEM NUMBER
SONESSE 40 POE AT 2/25 TYPE 2 (30W)	ROUND	2.5	25	48V DC	0.55	21.46	POE	1241426
SONESSE 40 POE BT 4/25 TYPE 3 (60W)	ROUND	4	25	48V DC	0.85	21.46	POE	1241427
SONESSE 40 POE BT 6/25 TYPE 4 (75W)	ROUND	6	25	48V DC	1.10	21.46	POE	1241428









Zigbee®

The Sonesse® 30 24V DC Zigbee motor increases motorized shading opportunities. It features a 2Nm powerful lifting capacity utilizing low-voltage DC power to quietly operate small profile shades and is dedicated to a variety of interior applications.

Convenience

• Compatible with a wide range of interior window coverings

Easy integration

- Seamless integration to match any interior décor
- Thin round head for smooth transition into shade and tube profile
- Smaller light gap to minimize light leakage
- Interchangeable head color (white, black, and grey) to match fabric and hardware style and color
- Recessed interchangeable metal adaptor plate compatible with all hardware systems
- Fits small diameter tubes (suitable for an internal diameter of 31mm or more)
- Ideal for small narrow windows to maximize viewable window area
- Low-voltage 24V DC power for safe and easy wiring

Easy programming and adjustment with TaHoma® pro

- Installation and programming done directly from the app: intuitive step-by-step programming instructions
- Integrated button on the motor head allows for leaving the network and full reset
- Acts as a Zigbee® mesh network router to extend radio range
- Dedicated maintenance tool, Serv-e-Go

Reliability and services

- Safe protocol
- · Somfy quality & warranty

Main functions














MY function







NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
SONESSE® 30 24V DC ZIGBEE	ROUND	2	25	24V DC	0.80	18.88	0.62	ZIGBEE	1241970













Radio Technology Somfy® (RTS)

Quiet small shade motorization that features interchangeable, colored motor head covers designed to blend into any décor. This motor adapts to any hardware to consistently reduce the light gap.

Expand Opportunities for Success

- Improved sound level that meets our Designed for Silence criteria.
- Fully UL listed motor, meets safety & inspection requirements.
- New style motor head with interchangeable head covers available in 3 different colors (white, grey, and black).
- · Ideal for small, narrow windows to maximize viewing area.
- Local control via a simple press of a button directly on the motor head.

Easy to Fabricate & Install

- Low-voltage (24V) for safe and easy wiring.
- Ergonomically friendly manual programming button on the motor head allows easy access and provides local control.
- LED lights provide visual feedback to confirm communication.
- · Thin motor head minimizes the light gap.
- · Recessed, interchangeable metal adaptor plates are compatible with industryleading hardware and maintain the reduced light gap.
- Allows wireless radio control of motorized applications via the RTS family of controls.

Main functions



Medium sized blinds



Soft start-stop Quick & easy

settings



LED indicator

Remote limit setting



Adjustable speed

MY function



Speed control



Electronic end limits

with Variation Compatible end-products

Compatible

















NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
SONESSE® 30 RTS 24V DC	ROUND	2	25	24V DC	0.63	17.61	0.82	RTS 433 MHZ	1241142











Somfy Digital Network™ (SDN) RS485



Expand your opportunities for success

- Improved sound level that meets our Designed for Silence criteria.
- Fully UL listed motor, meets safety & inspection requirements.
- New style motor head with interchangeable head covers available in 3 different colors (white, gray & black).
- · Ideal for small, narrow windows to maximize viewing area.
- Intelligent motors compatible with Somfy Digital Network two-way, RS485, hard-wired solutions, as well as the animeo IP total solar management system.
- · Easily integrates with third-party systems.
- Local control via a simple press of a button directly on the motor head.

Easy to fabricate & install

- Low-voltage (24V) for safe and easy wiring.
- Ergonomically friendly manual programming button on the motor head allows easy access and provides local control.
- LED lights provide visual feedback to confirm communication.
- Thin motor head also minimizes the light gap.
- · Recessed, interchangeable metal adaptor plates are compatible with industryleading hardware and maintain the reduced light gap.
- Setup and commissioning via RS485 software setting tools.

Main functions










Adjustable speed



Speed control










Advanced diagnostic



Electronic end limits



NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	TECHNOLOGY	ITEM NUMBER
SONESSE® 30 RS485 24V DC	ROUND	2	25	24V DC	0.73	18.86	RS485	1241144













Dry Contact

Quiet small shade motorization featuring interchangeable, colored motor head covers designed to blend into any décor. Adaptable to any hardware to consistently reduce the light gap.

Expand your opportunities for success

- Improved sound level that meets our Designed for Silence criteria.
- Fully UL listed motor, meets safety & inspection requirements.
- New style motor head with interchangeable head covers available in 3 different colors (white, gray & black).
- Ideal for small, narrow windows to maximize viewing area.
- Local control via a simple press of a button directly on the motor head.

Easy to fabricate & install

- Low-voltage (24V) for safe and easy wiring.
- Ergonomically friendly manual programming button on the motor head allows easy access and provides local control.
- LED lights provide visual feedback to confirm communication.
- Thin motor head also minimizes the light gap.
- Recessed, interchangeable metal adaptor plates are compatible with industry-leading hardware and maintain the reduced light gap.
- Dry contact connections for simple limit setting and control.

Main functions



Medium sized blinds



Soft start-stop



LED indicator




Adjustable speed



Speed control

Electronic end limits Compatible end-products



NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	TECHNOLOGY	ITEM NUMBER
SONESSE® 30 DCT 24V DC	ROUND	2	25	24V DC	0.95	17.61	DCT	1241146











Sonesse® ULTRA 50 DC Motors

Radio Technology Somfy® (RTS)

Motorize a wide variety of window coverings to create the perfect environment and enjoy the peace and serenity provided by the Sonesse® ULTRA. It offers exceptional lifting capacity so users can enjoy powerful operation in a quiet and relaxing environment.

ULTRA Powerful

- Superior torque of up to 4Nm allows the motor to be installed for almost any application on the market.
- Allows for a single Sonesse ULTRA to multi-band up to six shades.

ULTRA Quiet

- Packed with innovations and patented technologies that provide 4Nm of power and an acoustic performance of less than 38dBA.
- Most powerful and quietest motor on the market.

ULTRA Flexible

- Available for a variety of control systems, for all types of spatial configurations in commercial and residential buildings, in both new and renovated projects.
- Allows wireless radio control of motorized applications via the RTS family of controls.









settings








LED indicator



Compatible end-products

Quick & easy



NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
SONESSE® ULTRA 504 A8 DC RTS	SQUARE	4	25	24V DC	1.50	31.50	0.66	RTS 433 MHZ	1134023



Sonesse® ULTRA 50 DC Motors

Somfy Digital Network™ (SDN) RS485

Motorize a wide variety of window coverings to create the perfect environment and enjoy the peace and serenity provided by the Sonesse® ULTRA. It offers exceptional lifting capacity so users can enjoy powerful operation in a quiet and relaxing environment.

ULTRA Powerful

- Superior torque of up to 4Nm allows the motor to be installed for almost any application on the market.
- Allows for a single Sonesse ULTRA to multi-band up to six shades.

ULTRA Quiet

- Packed with innovations and patented technologies that provide 4Nm of power and an acoustic performance of less than 38dBA.
- Most powerful and quietest motor on the market.

ULTRA Flexible

• Available for a variety of control systems, for all types of spatial configurations in commercial and residential buildings, in both new and renovated projects.

- Intelligent, two-way communication via the industry standard RS485.
- Integrates with third-party control systems.
- Compatible with animeo® IP total solar management system.

Main functions





Soft start-stop



LED indicator



Adjustable speed



Speed control











Electronic end limits Advanced diagnostic













NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
SONESSE® ULTRA 504 A8 DC RS485	SQUARE	4	25	24V DC	1.50	31.50	0.66	RS485	1134022

Roll Up Wired R28 DC Motors

Standard Motors - Rapid Limit Adjustment

Users set blinds and shades in motion using low-voltage wiring which does not require an electrician.

Comfort & Convenience

- Conveniently manage glare.
- Protect furnishings from harmful rays.
- No unsightly lift cords which makes it safer for children and pets.

Energy Savings

• Easily control the amount of sunlight entering the home or building.

Easy to Install

- Flexible wiring thanks to an adjustable cable and plug-in connector.
- Limit end stops adjustable individually with two independent switches.



Main functions



Small window coverings



Speed control



Rapid limit adjustments











LAYERED ROMAN HORIZONTALS

NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
ROLL UP WIRED R28 (PIN MOUNT)	ROUND	0.8	30	24V DC	0.32	11.54	0.98	WIRED	1002832
ROLL UP WIRED R28 (EAR MOUNT)	ROUND	0.8	30	24V DC	0.32	11.54	0.98	WIRED	1002833
ROLL UP WIRED R28 (STARHOLE MOUNT)	ROUND	0.8	30	24V DC	0.32	11.54	0.98	WIRED	1002834



Roll Up 24 WireFree™ (Li-ion) Motor

Radio Technology Somfy® (RTS)

The Roll Up 24 is a compact motor that is ideal for applications requiring minimal spacing, such as narrow window openings. It features a built-in rechargeable Li-ion battery for easy maintenance and cost efficiency.

Main Features

- Discreet, compact design to accommodate today's high-performance energyefficient windows.
- Slow start and stop produces elegant shade movement.
- Compatible with roller/solar shades, Roman shades, woven shades, sheer horizontals, zebra/layered shades and horizontal blinds.
- Wirefree solution for areas where wiring can be costly.
- Backed by Somfy's 5-year warranty.
- Solar charging option.
- ESD Immunity.













SPEED

38







Main functions







Compatible with solar charging

Soft start-stop



LED indicator

MY function

Adjustable speed



Remote limit setting

Compatible end-products

Speed control



NAME

ROLL UP 24 WIREFREE™ RTS

(LI-ION)

ROMAN



HEAD TYPE

ROUND



TORQUE

(Nm)

0.55



WOVEN

RATED CURRENT INPUT VOLTAGE TECHNOLOGY LENGTH (INCHES) (AMPS) NUMBER 12V DC 0.90 18.50 RTS 433 MHZ 1240278

Sonesse® 28 WireFree (Li-ion) Motors

Zigbee®

The Sonesse® 28 WireFree Zigbee (Li-ion) is a designed for silence wirefree motor dedicated to a wide range of interior window coverings. It features a built-in rechargeable lithium-ion battery for easy installation, minimal maintenance and enhanced aesthetics.

Convenience

• Compatible with a wide range of interior window coverings

Easy installation

No wiring or external batteries

Easy programming and adjustment with TaHoma® pro

- Installation and programming done directly from the app: intuitive step-by-step programming instructions
- Integrated button on the motor head allows for leaving the network and full reset
- Dedicated maintenance tool, Serv-e-Go

Reliability and services

- Highly secure protocol
- Premium, quality battery that can be replaced
- Somfy quality & warranty

Main functions





Battery level feedback

Position feedback



Soft start-stop

Quick & easy

settings



 $\mathsf{LED}\,\mathsf{indicator}$

MY function



Adjustable speed



solar charging Compatible end-products

Compatible with



NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	TECHNOLOGY	ITEM NUMBER
SONESSE® 28 WIREFREE ZIGBEE (LI-ION)	ROUND	1.1	20	12V DC	0.65	21.50	ZIGBEE	1241755









Sonesse® 28 WireFree (Li-ion) Motors

Radio Technology Somfy® (RTS)





A Designed for Silence, wirefree motor that features improved sound performance.

Main Features

- Designed for Silence sound level
- Built-in rechargeable lithium-ion battery
- Recessed programming button
- Improved, smaller diameter head design
- Solar charging option
- ESD immunity
- Uses Sonesse 30 WireFree crown & drive adaptors

Main functions













Adjustable speed



Remote limit setting










MY function











NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	TECHNOLOGY	ITEM NUMBER
SONESSE® 28 WIREFREE RTS (LI-ION)	ROUND	1.1	20	12V DC	0.75	21.50	RTS 433 MHZ	1003297

> (Amily

Roll Up 28 WireFree™ (Li-ion) Motors

Radio Technology Somfy® (RTS)

The Roll Up 28 offers an improved motor design featuring embedded lithium-ion technology.

Ease of Installation

- Improved redesigned motorhead.
- · Recessed programming button on the motor head.
- · LED low battery indicator.
- Adjustable speed for precise control.

User Comfort & Convenience

- · Improved sound level.
- Removeable charging cable.
- Compatible with solar charging options.
- Operates with simple voice commands using TaHoma.
- Solar charging option.
- ESD Immunity.

Main functions





Compatible with Variation

Built-in battery







Soft start-stop

Compatible with

solar charging



INPUT VOLTAGE

12V DC



LED indicator

WOVEN SHADES

1.10



Compatible end-products

Speed control



NAME

ROLL UP 28 WIREFREE™ RTS V2

(LI-ION)





HEAD TYPE

ROUND



TORQUE

(Nm)

1.1



SPEED

(RPM)

20





RATED CURRENT (AMPS) ITEM LENGTH **TECHNOLOGY** NUMBER (INCHES)

RTS 433 MHZ

1241150

21.38



Sonesse® ULTRA 30 WireFree (Li-ion) Motors

Zigbee®



*}

Convenience

• Compatible with a wide range of interior window coverings

Easy installation

• No wiring or external batteries

Easy programming and adjustment with TaHoma® pro

- Installation and programming done directly from the app: intuitive step-by-step programming instructions
- Integrated button on the motor head allows for leaving the network and full reset
- Dedicated maintenance tool, Serv-e-Go

Reliability and services

- · Highly secure protocol
- Premium, quality battery that can be replaced
- Somfy quality & warranty

Main functions





Battery level feedback



Soft start-stop



LED indicator



Adjustable speed



Compatible with solar charging



Position feedback




Quick & easy settings



MY function





NAME	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	TECHNOLOGY	ITEM NUMBER
SONESSE® ULTRA 30 WIREFREE ZIGBEE (LI-ION)	2	20	12V DC	1.25	25.59	ZIGBEE	1241752

Sonesse® ULTRA 30 WireFree (Li-ion) Motors

Radio Technology Somfy® (RTS)





The Sonesse ULTRA 30 features a built-in rechargeable lithium-ion battery which means no wiring for installers, minimal maintenance for users! It offers a powerful 2 Nm lifting capacity making it an ultra-quiet and ultra-reliable solution for larger interior shades.

Main Features

- Ultra-quiet operation.
- · Built-in rechargeable lithium-ion battery.
- Improved redesigned motorhead.
- · LED low battery indicator.
- Removable charging cable.
- Smooth motion with adjustable speed control.
- Compatible with the Situo® 5 Variation RTS remote for precise tilt control.
- Slow start/stop with adjustable speed control.
- Solar charging option.
- ESD immunity.
- Operates with simple voice commands using TaHoma.

Main functions





Built-in battery

Compatible

with Variation



Soft start-stop Compatible with

solar charging



LED indicator

MY function




Adjustable speed



Remote limit setting









PLEATED SHADES













NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	TECHNOLOGY	ITEM NUMBER
SONESSE® ULTRA 30 WIREFREE RTS (LI-ION)	ROUND	2	20	12V DC	1.50	25.59	RTS 433 MHZ	1003310



Sonesse® 40 WireFree (Li-ion) Motor

Zigbee®

The Sonesse® 40 WireFree Zigbee (Li-ion) increases motorized interior shading opportunitiesnwith 4Nm ultra-strong wirefree performance. Featuring a built-in rechargeable lithium-ion battery, this ultra-quiet and ultra-reliable motor eliminates the need for wiring, providing convenience to both installers and end users.

Easy installation

- Seamless integration to match any interior decor
- Thin round head for smooth transition into shade and tube profile
- Interchangeable head color (white, black, and grey) to match fabric and hardware
- Recessed interchangeable metal adaptor plate compatible with all hardware
- Smaller light gap to minimize light leakage
- Fits small diameter tubes (suitable for an internal diameter of 38mm or more)
- ETL listed to comply with local building codes and requirements
- USB-C connector allows optimized charging experience

Easy programming and adjustment with TaHoma® pro

- Installation and programming done directly from the app: intuitive step-by-step programming instructions
- Integrated button on the motor head allows for leaving the network and full reset

Maintenance

• Dedicated maintenance tool, Serv-e-Go

Easy integration

• Easily integrates with third-party control systems when used with TaHoma® switch

Reliability and services

- · Highly secure protocol
- · Premium, quality battery that can be replaced
- Somfy quality & warranty

Main functions









Compatible with



LED indicator




Battery level feedback





Soft start-stop



Adjustable speed

NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	TECHNOLOGY	ITEM NUMBER
SONESSE® 40 WIREFREE ZIGBEE (LI-ION)	ROUND	4	20	12V DC	1.70	25.59	ZIGBEE	1245993





Sonesse® 40 WireFree (Li-ion) Motor

Radio Technology Somfy® (RTS)





The Sonesse 40 WireFree is a quiet and powerful motor for a wide range of interior window covering applications. It features a rechargeable built-in lithium-lon battery and a powerful lifting capacity for larger shades.

Main Features

- Compact 40mm design easily adapts to smaller shading hardware.
- Built-in rechargeable lithium-ion battery.
- · Redesigned discreet motor head.
- · Recessed programming button.
- Removable charging cable.
- Solar charging option.
- ESD immunity.

Main functions



Large window coverings

Speed control



Built-in battery



Soft start-stop



LED indicator



Adjustable speed



Remote limit setting

coverings



Compatible with Variatio



Compatible with solar charging



MY function

















WOVEN SHADES

MOTOR LENGTH (INCHES) TORQUE **SPEED** RATED CURRENT NAME **HEAD TYPE** INPUT VOLTAGE TECHNOLOGY NUMBER SONESSE® 40 ROUND 3 20 12V DC 1.70 25.59 RTS 433 MHZ 1240485 WIREFREE RTS (LI-ION)



Sonesse® 28 WireFree (External Battery) Motors

Zigbee®









The Sonesse® 28 WireFree Zigbee (External Battery) is a connected wirefree motor, extremely compact and designed for silence. It can be powered using an external plug-in, rechargeable lithium-ion battery pack or plug-in power supply.

Convenience

• A compact solution adapts to narrow window openings

Easy programming and adjustment with TaHoma® pro

- Installation and programming done directly from the app: intuitive step-by-step programming instructions
- Integrated button on the motor head allows for leaving the network and full reset
- Dedicated maintenance tool, Serv-e-Go

Reliability and services

- · Highly secure protocol
- Somfy quality & warranty

Main functions



External battery



Battery level feedback



Soft start-stop



LED indicator



Adjustable speed







Position feedback



Quick & easy settings



MY function

Compatible end-products











SHADES





NAME	ME TORQUE SPEED (Nm) (RPM)		INPUT VOLTAGE	RATED CURRENT (AMPS)			ITEM NUMBER
SONESSE® 28 WIREFREE ZIGBEE (EXTERNAL BATTERY)	1.1	20	12V DC	0.65	13.70	ZIGBEE	1241754

Sonesse® 28 WireFree (External Battery) Motors

Radio Technology Somfy® (RTS)







The Sonesse 28 WireFree is a Designed for Silence motor with an improved sound level. It provides the ultimate in quiet performance and is perfect for today's decorative shading solutions.

Increase Opportunities

- · Compact for smaller window openings.
- Smooth motion with adjustable speed control.
- LED low battery indicator.

Comfort & Convenience for Users

- Designed for Silence, to minimize noise during operation.
- Improved, smaller diameter head design.
- Optional power supply.
- Solar charging option.
- ESD Immunity.

Main functions



Medium sized blinds



External battery



Soft start-stop



LED indicator



Adjustable speed



Remote limit setting





Compatible with Variation



Compatible with solar charging



MY function



ROMAN













NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
SONESSE® 28 WIREFREE RTS (EXTERNAL BATTERY)	ROUND	1.1	20	12V DC	1.10	13.70	0.98	RTS 433 MHZ	1241230



Roll Up 28 WireFree™ (External Battery) Motors

Radio Technology Somfy® (RTS)





The Roll Up 28 WireFree offers an improved motor design and optional lithium-ion external battery power.

Ease of installation

- Improved redesigned motorhead.
- Recessed programming button on the motor head.
- LED low battery indicator.
- · Adjustable speed control.

User Comfort & Convenience

- Improved sound level provides enhanced performance.
- Compatible with solar charging options to harness the energy of the sun.
- Operates with simple voice commands using TaHoma.

Main functions



Medium sized blinds



External battery



Soft start-stop

Compatible with

solar charging



LED indicator

MY function



Adjustable speed



Remote limit setting





Compatible










Compatible end-products



NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
ROLL UP 28 WIREFREE™ RTS V2 (EXTERNAL BATTERY)	ROUND	1.1	20	12V DC	1.10	12.83	0.98	RTS 433 MHZ	1241162

Cord Lift WireFree™ (External Battery) Motors

Zigbee®









The Cord Lift 25 WireFree™ Zigbee (External Battery) is a dual-shaft smart motor specifically designed for Cord Lift applications. It is powered by an external lithiumion rechargeable battery pack or plug-in wall power supply.

Easy integration

- Suitable for headrails at least 25 x 25mm wide
- Dual-shaft motor for a central position in the headrail

Simple installation

• Save money & time, no need for electrical wiring

Dedicated setting tool with TaHoma® pro app and maintenance tool Serv-e-

- Limit settings can be done directly from the app via step-by-step programming
- Advanced settings available: soft start & stop, speed
- Maintenance service with Serv-e-Go: remote diagnostics

Reliability and profitability

- · Highly secure protocol
- · Somfy quality & 5-year warranty

Main functions



External battery



Battery level feedback

Position feedback



Soft start-stop

Quick & easy



LED indicator


MY function



Adjustable speed









SHADES











TORQUE SPEED (RPM) RATED CURRENT NAME INPUT VOLTAGE TECHNOLOGY ITEM NUMBER LENGTH (Nm) (AMPS) (INCHES) **CORD LIFT 25** WIREFREE™ ZIGBEE 8.0 30 12V DC 0.85 7.76 ZIGBEE 1241780 (EXTERNAL BATTERY)

Cord Lift WireFree™ (External Battery) Motors

Radio Technology Somfy® (RTS)





This battery powered motor installs in minutes and is perfect for hard-to-reach window coverings and areas where wiring may be a challenge.

Main Features

- Great for interior cord-lift applications.
- Installs in minutes and doesn't require an electrician.
- Flexible power and control options.
- Superior quality, backed by 5-year warranty.



Main functions



Medium sized blinds

Remote limit setting




External battery

MY function



Speed control















NAME	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
CORD LIFT WIREFREE™ CL32 RTS MOTOR	0.34	72	12V DC	1.70	4.51	0.98	RTS 433 MHZ	1002422
CORD LIFT WIREFREE™ TL25 MOTOR	0.8	30	12V DC	0.85	7.76	0.98	RTS 433 MHZ	1003294

Tilt WireFree™ (External Battery) Motors

Zigbee®

The Tilt 50 WireFree™ Through-Shaft Zigbee (External Battery) is a through-shaft smart motor specifically designed for tilting 2-inch horizontal blinds. It is powered by an external lithium-ion rechargeable battery pack or plug-in power supply.

Easy integration

- Suitable for headrails at least 50mm wide
- Through-shaft motor allows for a central position in the headrail providing a wider application scope (applicable to retrofit applications)
- No hardware modifications required for horizontal blinds

Simple installation

• Save money & time, no need for electrical wiring

Dedicated setting tool with TaHoma® pro app and maintenance tool Serv-e-Go

- Limit settings can be done directly from the app via step-by-step programming instructions
- Advanced setting available for soft start & stop, speed adjustment, etc.
- Maintenance service with Serv-e-Go: remote diagnostics

Reliability and profitability

- · Highly secure protocol
- Somfy quality & 5-year warranty

Main functions



External battery



Battery level feedback



Soft start-stop



LED indicator



Adjustable speed



Central mount



THROUGH-SHAFT

ZIGBEE (EXTERNAL BATTERY)



1

Position feedback



Compatible with Variation

12V DC



0.45

MY function

Compatible end-products





10







Tilt WireFree™ (External Battery) Motors

Radio Technology Somfy® (RTS)



Main Features

- Improved sound performance.
- · Battery-operated.
- Built-in power cable and integrated programming button.
- Through-shaft design simplifies the fabrication process, no modification of tilt rod required.
- Allows for a wider application scope (wood, faux, composite, and metal blinds).
- Increased retrofit possibilities.
- · Solar charging options.

Main functions



Medium sized blinds



External battery

Compatible with Variation



Soft start-stop

Central mount



LED indicator


MY function



Adjustable speed



Remote limit setting





HORIZONTAL BLINDS

NAME	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
TILT 50 WIREFREE™ THROUGH-SHAFT RTS	1	10	12V DC	0.45	4.06	0.98	RTS 433 MHZ	1240276









NOTES

Shade & Blind Accessories



Power Cables

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
4-Conductor Motor Cable SJTW (Sold per Foot)	9012110	8	NEMA Power Plug Not Installed for Sonesse® 40 motor (RTS Version Only)	9017447	
3-Conductor Motor Cable SJTW (Sold per Foot)	9012111	2			

Power Cables - 3-Conductor Fast Connector & Extensions

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Fast Connector Extension Cable 3C SJTW with NEMA Plug - 10.4 ft.	9020791		Fast Connector Extension Cable 3C SJTW with NEMA Plug - 4.4 ft.	9021114	70
Fast Connector Extension Cable 3C SJTW with NEMA Plug - 18 ft.	9020792		Fast Connector Extension Cable 3C SJTW with NEMA Plug - 8.4 ft.	9021115	
Fast Connector Extension Cable 3C SJTW with NEMA Plug - 24 ft.	9020793		Fast Connector Extension Cable 3C SJTW without NEMA Plug - 8.4 ft.	9021157	
Fast Connector Extension Cable 3C SJTW with NEMA Plug - 1.4 ft.	9021113	C	Panel Mount, 3C Female Fast Connector	9026398	m

Power Cables - 4-Conductor Fast Connector & Extensions

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
Fast Connector Extension Cable 4C SJTW - 4.4 ft.	9021117	Fast Connector Extension Cable 4C SJTW - 16.4 ft.	9021120	
Fast Connector Extension Cable 4C SJTW - 8.4 ft.	9021118	Fast Connector Extension Cable 4C SJTW - 22.4 ft.	9021121	

Power Cables - 4-Conductor Wago Connectors

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Tool for WAGO AC Quick Connector	9027663	1	Grey WAGO AC Quick Connector (4 pins)	9027664	



400 Series Accessories Crowns & Drives

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Crown and Drive Set (Somfy 40mm x 1.5mm Round Tube)	9012224	00	Drive Adaptor (for 40mm x 1mm Round Tube)	9132142	
400 Series Crown and Drive Set (40mm x 0.8mm Octagonal Tube)	9012225	0	Crown Adaptor (for 40mm x 1mm Round Tube)	9132143	0
400 Series to 500 Series Crown and Drive Adaptor Kit	9013763	000	40mm Octagonal Crown for 40mm x 0.8mm Octagonal Tube	9147327	0
Soft Drive Wheel 44mm (Acmeda Type)	9013790		Crown (for 40mm x 1.5mm Round Tube)	9147330	O
Crown Adaptor 44mm Tube (Acmeda Type)	9013791	0	Drive for (40mm x 1.5mm Round Tube)	9147544	
Crown & Drive for RollEase/ZMC 2" Profiled Tube	9016352	0 O @	Drive (for 40mm x 0.8mm Octagonal Tube)	9147545	1
400 Series Crown and Rubberized Drive (Somfy 40mm x 1.5mm Round Tube)	9016654	0	400 Series Drive Stop with Screw (Recommended for Use with Soft Drives)	9147894	
400 Series Crown and Rubberized Drive for 40mm Octagonal Tube	9016655	O 🕖	Anti-Blocking System (ABS) 400 Series Left Rotation	9704138	
Crown & Drive Set Adaptor for Hunter Douglas 4" Silhouette (Quartette)	9016953	00	Anti-Blocking System (ABS) 400 Series Right Rotation	9704139	

Tubes

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
40mm Round Aluminum Tube (ID 36mm) (20 ft. Max Length)	1781153	2" Profiled Roller Tube (16 ft. Max Length)	1781798	
40mm Octagonal Tube (Minimum Order Length 20')	1781154			

Tube Components

NAME	ITEM NUMBER		NAM
Cord Take-Up Reel (for RollEase & ZMC XL Series 1.5" Tube)	1780786	0	40mn Applio

NAME	ITEM NUMBER	
40mm Fabric/Cord Clip for Roman Shade Applications	9012200	C

Motor Plates

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Sonesse® 30-40 Motor Plate - RollEase 360 R3-R8 10mm x 1.8mm Pin Diameter 6.8mm and Screws	9025996	6 to	Sonesse® 30-40 Motor Plate - Rollease 360 R3-R8 10mm x 1.8mm Pin Diameter 7mm and Screws	9026001	6 V
Sonesse® 40 Motor Plate - Rollease 580 R16-24 15.9mm x 1.8mm & Screws	9025997		Sonesse® 30-40 Motor Plate - RollEase SkyLine and Screws	9026003	93
Sonesse® 30-40 Motor Plate - Acmeda 12mm and Screws	9025999	87	Sonesse® 30-40 Motor Plate - Rollease 360 R3-R8 10mm x 1.6mm & Screws	9026005	000
Sonesse® 30-40 Motor Plate - Rollease RBGAL 16x3.2mm & Screws	9026000	品			

Adaptor Plates

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
R8 Adaptor Plate	9012258	Q + G	R8 Adaptor Plate with Screws	9014073	0. # C
Motor Adaptor Plate (Acmeda Type) and Screws	9013789		Motor Adaptor Plate for RollEase SkyLine & ZMC XL Series Brackets	9016378	0.0

Motor Head Covers

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Sonesse® 40 Motor Head Cover, White (Supplied with Motor)	9026090		Sonesse® 40 Motor Head Cover, Black	9026092	Q
Sonesse® 40 Motor Head Cover, Grey	9026091	0			



400 Series Accessories Idler End Caps

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
End Cap for 40mm Octagonal Tube	9012274	-	RollEase Heavy Duty Spring Idler End Pin (1.5" Tube)	9017912	
RollEase 38mm Tube R8 End Cap	9012276	Ti	ldler End Plug (8mm Diameter Pin - Decorator Type)	9500688	=
Idler End Plug 44mm Tube (Acmeda Type)	9013774	9			

Motor Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
RollEase 1.5" Bracket Kit R8 Series for Somfy 40mm Round Tube	9012311		RollEase Silent Motor Mount Clip for SkyLine Bracket	9017255	0
RollEase 2" Bracket Kit R8 Series for Somfy 2" Round Tube	9012313		10mm Square Motor Bracket for 400S Motors	9147334	AL.
Motor & Idler Bracket Kit 40P (Acmeda type)	9013778	跑题	LO Motor Bracket for 400S Motors	9147337	
Dual Motor and Idler Bracket Kit (Acmeda type)	9013782	26	400 Series to 500 Series Motor Mounting Conversion Bracket	9500659	
RollEase 2" SkyLine Universal Motor Bracket and Idler Bracket	9016325		400 Series Motor Bracket (Decorator Type)	9500683	(5. ()

Intermediate Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Sonesse® 30 Intermediate Bracket & Cover, 40mm Projection	9013783	0	Intermediate Bracket (Decorator Type)	9500687	

Intermediate End Plugs

NAME	ITEM NUMBER	
Intermediate Female Idler End Plug (Acmeda type)	9013785	30

NAME	ITEM NUMBER	
Intermediate Male Idler End Plug (Acmeda type)	9013786	10

Idler Brackets

NAME	ITEM NUMBER
400 Series Idler End Bracket (Decorator type)	9500685



NAME	ITEM NUMBER	
Idler Adaptor Collar for 2" Profiled Tube	9016366	1

Headrail Adaptors

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
CTS40 Kit for Gutter Rail 2" x 2 1/4" (57mm x 51mm) Headrail	1781118	THE STATE OF THE S	Ladder Braid Crimps for CTS40 System	9163292	4
CTS Cone for 40mm Octagonal Tube	9162144		Motor/Idler Bracket for 2" x 2 1/4" (57mm x 51mm) Headrail	9500736	M

Miscellaneous Brackets

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
Plastic Bracket Cover 40P Kit (Acmeda type)	9013780	White Bracket Covers (2" SkyLine)	9016326	00

Support Clips

NAME	ITEM NUMBER	
2" Slat Support Clips for Wood Blinds (White)	1781134	



Tools

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
CTS40 Pneumatic Punch/Die for 2" x 2 1/4" (Gutter Rail) Headrail	1781099	Standard Motor Test	er Cable, 4-Wire 9012116	

Screws

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
M3.5 x 9mm Screw (Sonesse® 40 WireFree, Sonesse® 30 Wired & WireFree, & Roll Up WireFree Only)	9014066	N. A.	Sonesse® 40 M4 x 8mm Motor Head Screw - 29mm Spaced Holes	9026094	Product Image Coming Soon
Sonesse® 30-40 Motor Plate Screw- M3 x 6mm Philips Flat-Head Plastite	9026093				

Connectors

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
RJ45 Female to Female Coupler	9026095	Weidmüller 2-Position Connector	9027985	

PoE Connectors

NAME	ITEM NUMBER	
PoE Shielded RJ45 Female to Female coupler	9028957	The same

500 Series Accessories

Power Cables

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
4-Conductor Motor Cable SJTW (Sold per Foot)	9012110	000	3-Conductor Motor Cable SJTW (Sold per Foot)	9012111	2

Power Cables - 3-Conductor LT

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable - 10 ft.	9018190	Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable with NEMA Plug - 18 ft.	9021052	
Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable - 24 ft.	9020985	Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable with NEMA Plug - 24 ft.	9021053	
Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable with NEMA Plug - 1.5 ft.	9021049	Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable - 10 ft. (Black)	9028737	29
Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable with NEMA Plug - 6 ft.	9021050	Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable - 24 ft. (Black)	9028738	\$
Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable with NEMA Plug - 10 ft.	9021051			

Power Cables - 4-Conductor LT

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
Sonesse® 50 & LT50/LT60 SJTW 4C Cable - 10 ft.	9018345	Sonesse® 50 & LT50/LT60 SJTW 4C Cable - 24 ft.	9021046	

Power Cables - 3-Conductor Fast Connector & Extensions

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Fast Connector Extension Cable 3C SJTW with NEMA Plug - 10.4 ft.	9020791		Fast Connector Extension Cable 3C SJTW with NEMA Plug - 1.4 ft.	9021113	
Fast Connector Extension Cable 3C SJTW with NEMA Plug – 18 ft.	9020792		Fast Connector Extension Cable 3C SJTW with NEMA Plug - 4.4 ft.	9021114	75
Fast Connector Extension Cable 3C SJTW with NEMA Plug – 24 ft.	9020793		Fast Connector Extension Cable 3C SJTW with NEMA Plug - 8.4 ft.	9021115	
Sonesse® 50 & LT50 RTS/RS485 Motor Pigtail to Fast Connector SJTW 3C Cable - 1.6 ft.	9020803	1	Fast Connector Extension Cable 3C SJTW without NEMA Plug - 8.4 ft.	9021157	



Power Cables - 3-Conductor Fast Connector & Extensions

NAME	ITEM NUMBER	
Panel Mount, 3C Female Fast Connector	9026398	M

Power Cables - 4-Conductor Fast Connector & Extensions

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Sonesse® 50 & LT50 Motor Pigtail to Fast Connector SJTW 4C Cable - 1.6 ft.	9020804		Fast Connector Extension Cable 4C SJTW - 16.4 ft.	9021120	
Fast Connector Extension Cable 4C SJTW - 4.4 ft.	9021117	0	Fast Connector Extension Cable 4C SJTW - 22.4 ft.	9021121	
Fast Connector Extension Cable 4C SJTW - 8.4 ft.	9021118				

Power Cables - 4-Conductor Wago Connectors

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Tool for WAGO AC Quick Connector	9027663	W.	Grey WAGO AC Quick Connector (4 pins)	9027664	

Data Cables

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
4-Conductor 26 AWG Modular Cable RJ9 to RJ45 - 2.5 ft. (Data Only, Black)	9018541	0	4-Conductor 26 AWG Modular Cable RJ9 to RJ45 - 2.5 ft. (Power & Data, Grey)	9018545	
4-Conductor 26 AWG Modular Cable RJ9 to RJ45 - 8 ft. (Data Only, Black)	9018542	0	4-Conductor 26 AWG Modular Cable RJ9 to RJ45 - 8 ft. (Power & Data, Grey)	9018546	
4-Conductor 26 AWG Modular Cable RJ9 to RJ45 - 12 ft. (Data Only, Black)	9018543	0	4-Conductor 26 AWG Modular Cable RJ9 to RJ45 - 12 ft. (Power & Data, Grey)	9018547	
4-Conductor 26 AWG Modular Cable RJ9 to RJ45 - 24 ft. (Data Only, Black)	9018544	0	4-Conductor 26 AWG Modular Cable RJ9 to RJ45 - 24 ft. (Power & Data, Grey)	9018548	

INTERIOR APPLICATIONS

500 Series Accessories Crowns & Drives

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
2.5" (60mm) Round LT50 Set "Hard Clip"	9012231	00	LT50 Drive 70mm Rollerbat	9016059	()
2.75" (67mm) Round LT50 Set "Hard Clip"	9012232	00	70mm LT50 Crown	9016298	0
60mm Octagonal LT50 Set	9012233	00	Sonesse® 50 Drive Wheel 50mm x 1.5mm Hard Clip- Quiet Accessory for Sonesse® Motors	9016630	
70mm Octagonal LT50 Set	9012234	00	RollEase "Silent Pin" Crown & Drive Adaptor for 3.25" (83mm) Tube	9016855	00
P72 LT50 Set	9012235	000	RollEase "Silent Pin" Crown Only for RollEase 2.5" (63mm) Tube	9016856	O
DS70 LT50 Set (0.8mm - 1mm Kit)	9012237	00	Sonesse® 50 Drive Wheel 50mm x 1.5mm Soft Clip- Quiet Accessory for Sonesse® Motors	9018455	
DS 74 LT50 Set	9012238	00	LT50 Crown 80mm Rollerbat	9019555	
DS 78 LT50 Set	9012239	09	LT50 Drive 80mm Rollerbat	9019556	(
Modified LT60 DS 78 Drive (Key Way Widened)	9012241		LT50 Crown 70mm Rollerbat	9026982	Θ
70mm Octagonal LT50 Crown	9012328	0	2.5" Round LT50 Drive "Hard Clip"	9206019	0
Sonesse® 50 Crown (for 56mm Acmeda Tube 10Nm Max)	9014125		2.5" (60mm) Round Drive "Soft Clip"	9206041	
Sonesse® 50 Drive (for 56mm Acmeda Tube 10Nm Max)	9014126	1	2" (47mm) Round Drive "Hard Clip"	9206088	
RollEase "Silent Pin" Crown & Drive Adaptor for 2.5" (63mm) Tube	9015234	C 🏉	2" (47mm) Round Drive "Soft Clip"	9206089	1



500 Series Accessories Crowns & Drives

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
3.5" Round LT50/60 Drive (89mm x 2mm)	9420303		SM65 (63mm) Round Drive	9751002	
4.0" Round LT50 Drive	9420304		DS 70mm Round Drive (0.8mm - 1mm)	9751005	1
Anti-Blocking System (ABS) 500 Series Right Rotation	9705414		AMA/P71 LT50 Drive	9751015	0
Anti-Blocking System (ABS) 500 Series Left Rotation	9705415		DS 78mm Round Drive	9761001	
2.5" 60mm Octagonal Crown	9707025	0	70mm Octagonal Drive	9761002	0
2.5" (60mm) Round Crown	9707026	0	DS 85mm Round Drive	9761003	
DS 78mm Round Crown	9707027	0	DS 78mm/D Round Drive	9761004	B
SM65 (63mm) Round Crown - 3 grooves	9707030	Q	DS 78mm/R Round Drive	9761005	0
2.75" (67mm) Round Crown	9707031	0	P72 LT50 Drive	9761011	0
DS 70 LT50 Crown	9707034	0	Drive Stop and Screw	9910004	10
DS 85mm Round Crown	9707035	0	AMA/P71 LT50 Crown	9997118	0
60mm Octagonal Drive	9751001				

Tubes

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
56mm OD Aluminum Sonesse® 50 Tube (16 ft. Lengths) - Mill Finish	1780743	2.5" OD Aluminum Tube (Minimum Order Length 16')	1781343	
56mm OD Aluminum Sonesse® 50 Tube (16 ft. Lengths) - White Powder Coat	1780744	RollEase 3.25" (83mm) Profiled Tube	1782096	
2.0" Aluminum Tube (Minimum Order Length 20')	1781148			

Tube Components

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Cord Fastener for 56mm Tube	1781408	9	2.5" Fabric/Cord Clip	9012201	C
Cord Take-Up Reel for 56mm Tube	1781899	0	2.0" Fabric/Cord Clip	9138028	C

Cable Guides

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Take-Up Reel for 2" Tube	1781151	0	Cable Guide for 63mm x 1.5mm (approx 2.5") Tube	9146071	00

Idler End Caps

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
13mm Square Drive Shaft - 12mm OD for End Cap	1781009	-	Sonesse® 50 Pin End Cap 10mm - Quiet Accessory for 2" Tube	9016628	THE B
2" Collapsible End Cap (Silent) - 10mm Shaft	9013592	-	RollEase "Silent Pin" Idler End Pin	9016857	T.
Idler End Cap (for 56mm Acmeda Tube)	9014097		Sonesse® 50 Pin End Cap 12mm - Quiet Accessory for 2" Tube	9018228	Will Co



500 Series Accessories Idler End Caps

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Sonesse® ULTRA 50 Universal Pin End Cap - 10mm.	9019716	e C	Heavy Duty End Cap Shaft	9420674	000
Sonesse® ULTRA 50 Universal Pin End Cap - 12mm	9019717	C	Universal End Cap - Collapsible 10mm Shaft (for 2" (47mm) Round Tube)	9420800	
2.0" Tube - 10mm Shaft End Cap	9128101	6	Universal End Cap - Collapsible 12mm Shaft (for 2" (47mm) Round Tube)	9420801	3
Idler End Cap without Shaft 2.0" OD with M5 Screw	9129631	(6)	Universal End Cap - Collapsible 10mm Shaft (Shorter Pin than Item 9420800)	9420814	C
Idler End Cap without Shaft 2.5" OD with M5 Screw	9129632		2.0" Plastic Idler End Cap - 10mm Shaft	9700958	(Es
2.0" End Cap with 12mm Shaft	9132087	(3)	Roller Tube End Cap with 12mm Hole	9701288	

Motor Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
LTS0 Adjustable Universal Motor Bracket	9002550		LO LT50 Motor Bracket with Stud (25 Nm max.)	9206021	AND P
LT50 Angle Plate for Motor Bracket	9012250		Weld-on Bracket without Spring Ring	9206029	O
Sonesse® 50 Star Head Motor Bracket 55P	9014135	3	Spring Ring	9206033	
RollEase "Silent Pin" Star Head Motor Bracket (White)	9016858	0	LT50 Adjustable Angle Bracket	9410639	
Pull Off Tool for Spring Ring	9206015		LT50 Universal Motor Bracket (50Nm Max)	9410651	
LO LT50 Motor Bracket with Stud (25 Nm max.)	9206020		LT Motor Bracket	9410665	

INTERIOR APPLICATIONS

500 Series Accessories Motor Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
LT50 HA Flush Mount Motor Bracket	9410715	0	Motor Bracket with Spring Ring - Square (120mm x 120mm)	9763503	49
Heavy Duty Angle Plate with Universal Motor Bracket (Max 85Nm)	9420602		Motor Bracket with Spring Ring - Square (100mm x 100mm)	9763508	***
Heavy Duty Angle Bracket for 9430610	9420604	b	Universal Motor Bracket (Metric) with Spring Ring and Threaded for M8 and M6 Bolts	9910001	0
Universal Motor Bracket with Spring Ring	9420631		Spring Ring with Locking Screw	9910002	
Motor Bracket "U" Shape	9510658		LT50 RH "LO" Plate with Stud (Gold)	9910016	ore T
Spring Ring with Loop	9685025	3	LT50 RH "LO" Plate with Stud (Silver)	9910017	vol.
LT Compact ST Motor Bracket PA66 with Spring Ring	9708461	0	Universal Motor Bracket - US Threads	9910021	0

Intermediate Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
13mm Sq. Intermediate Drive Shaft - 16mm OD for 9146011	1781018		Intermediate Bracket Wall Mount 55P	9014240	
LT50 Intermediate Bracket with 16mm ID Bearing	9002541		Non-Adjustable Intermediate Bracket 55P	9014684	
LT50 Adjustable Intermediate Support Bracket for 2" Tube	9012203		Intermediate Bearing Support for 1781018	9146011	5.0,5
Intermediate Bracket Ceiling Mount 55P	9014120		LT50 2" Universal Intermediate Bracket Kit	9410648	
Intermediate Bracket Ceiling Mount 55P, 0-90 Degrees	9014122	1	Heavy Duty LT Intermediate Support Bracket	9420673	



500 Series Accessories Intermediate End Plugs

NAME	ITEM NUMBER		NAME
Intermediate Male Idler End Plug (for 56mm Acmeda tube)	9014114	- CC	Intern Degre
Intermediate Female Idler End Plug (for 56mm Acmeda tube)	9014121	50	

1E	ITEM NUMBER	
rmediate Female Idler End Plug, 0-90 rees (for 56mm Acmeda tube)	9014123	C.C.

Idler Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Sonesse® 50 Adjuster Tool (for Idler Brackets and End Plugs)	1780742	7	U Shaped Idler Bracket	9127808	6
Idler Bearing for 12mm Shaft	1781015	0	14mm Bearing Plate for Idler Bracket Kit	9146007	. 10.
Ball Support for 9410803 and 9028665	1781030		LT50 Idler Bracket with 12mm Hole Nylon Bearing	9410633	(5)
ldler Bracket 14mm ID	9002540	(6)	LT50 Idler Bracket with 10mm Hole Nylon Bearing	9410635	(9)
ldler Bracket Kit 10mm (Ball & Holder)	9012657		Nylon ball bearing 10mm ID for 1781030	9410803	0
Sonesse® 50 Adjustable Idler End Bracket - Ceiling Mount 55P	9014110		Heavy Duty Idler Bracket with Idler End Cap Holder	9430603	THE !
Sonesse® 50 Adjustable Idler End Bracket - Wall Mount 55P	9014238		Nylon Ball Bearing and Holder with 12mm Hole for 9420604	9430610	60
Non-Adjustable Idler End Bracket 55P	9014683		Idler End Cap Holder (Anti-Vibration)	9540786	W.
RollEase "Silent Pin" Idler Bracket (Wall and Ceiling Mount) (White)	9016859		Silent Block Idler Bracket 10mm ID	9701310	0
Nylon Ball Bearing 12mm ID for 1781030	9028665	6			

Miscellaneous Brackets

NAME	ITEM NUMBER	
White Plastic Cover for LT Bracket	9002519	

NAME	ITEM NUMBER	
Light Duty Angle LT50 Type	9410637	

Tools

NAME	ITEM NUMBER	
Standard Motor Tester Cable, 4-Wire	9012116	(1)

NAME	ITEM NUMBER	
RS485 Motor Limit Setting & Address Reader Tool	9017142	

Screws

NAME	ITEM NUMBER	
Screw for Standard LT50 Motor	9670013	

Sonesse® 30 PoE Accessories Crowns & Drives

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
400 Series Crown and Drive Set (40mm x 0.8mm Octagonal Tube)	9012225	O	Hunter Douglas 37mm Crown & Drive	9020699	0
Crown & Drive Set Adaptor for Hunter Douglas 4" Silhouette (Quartette)	9016953	0	Crown & Drive for RollEase/ZMC 2" Profiled Tube	9021017	00.
RollEase 1.5" Crown & Drive	9020674	0	Acmeda 45 Crown & Drive	9021018	0-0
Louvolite 40mm Crown & Drive	9020675	60 0	Acmeda 45 Heavy Duty Crown & Drive	9021036	0-0
Sonesse® 30 WireFree to 400 Series Adaptor Kit	9020676	0	Louvolite 45mm Crown & Drive	9025811	000



Tubes

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
44mm Aluminum Tube (Acmeda) (Minimum Order Length 16')	1780688	40mm Octagonal Tube (Minimum Order Length 20')	1781154	
40mm Round Aluminum Tube (ID 36mm) (20 ft. Max Length)	1781153	RollEase 1.5" Roller Tube (16 ft. Lengths)	9017913	

Tube Components

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Cord Take-Up Reel (for RollEase & ZMC XL Series 1.5" Tube)	1780786	0	40mm Fabric/Cord Clip for Roman Shade Applications	9012200	C
Cord Take-Up Reel (for Acmeda 44mm Tube)	1781898	0			

Motor Plates

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Sonesse® 30-40 Motor Plate - RollEase 360 R3-R8 10mm x 1.8mm Pin Diameter 6.8mm and Screws	9025996	0 10	Sonesse® 30-40 Motor Plate - Rollease 360 R3-R8 10mm x 1.8mm Pin Diameter 7mm and Screws	9026001	(X)
Sonesse® 30-40 Motor Plate - Acmeda 12mm and Screws	9025999	0.50	Sonesse® 30-40 Motor Plate - RollEase SkyLine and Screws	9026003	9.3

Adaptor Plates

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
R8 Adaptor Plate	9012258	Q: 11 2:	R8 Adaptor Plate with Screws	9014073	* + *
Louvolite Adaptor Plate	9013958	(3)	Motor Adaptor Plate for RollEase SkyLine & ZMC XL Series Brackets	9016378	

Sonesse® 30 PoE Accessories Motor Head Covers

NAME	ITEM NUMBER		NAME	ITEM NUMBER
Sonesse® 30 24V Motor Head Cover, White (Supplied with Motor)	9027132	()	Sonesse® 30 24V Motor Head Cover, Black	9027134
Sonesse® 30 24V Motor Head Cover, Grey	9027133	0		

Idler End Caps

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
End Cap for 40mm Octagonal Tube	9012274	0	Collapsible End Plug (for Louvolite System 45)	9015555	46
Collapsible End Plug (for Louvolite System 40 & ZMC RS Series)	9013716	46	RollEase Heavy Duty Spring Idler End Pin (1.5" Tube)	9017912	
Idler End Plug 44mm Tube (Acmeda Type)	9013774	6	Idler End Plug (8mm Diameter Pin - Decorator Type)	9500688	E 14

Motor Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
RollEase 1.5" Bracket Kit R8 Series for Somfy 40mm Round Tube	9012311		Motor and Idler Bracket Kit (for Louvolite System 45)	9015554	DB
RollEase 2" Bracket Kit R8 Series for Somfy 2" Round Tube	9012313		Double SkyLine Bracket (Includes Left and Right Set)	9016616	
Motor and Idler Bracket Kit (for Louvolite System 40 & ZMC RS Series)	9013715	10	RollEase 1.5" SkyLine Bracket (2 Required)	9017910	
Dual Motor and Idler Bracket Kit (Acmeda type)	9013782	66	400 Series Motor Bracket (Decorator Type)	9500683	



Intermediate Brackets

NAME	ITEM NUMBER	
Intermediate Bracket (Decorator Type)	9500687	

Intermediate End Plugs

NAME	ITEM NUMBER	
Intermediate Female Idler End Plug (Acmeda type)	9013785	30

NAME	ITEM NUMBER	
Intermediate Male Idler End Plug (Acmeda type)	9013786	36

Idler Brackets

NAME	ITEM NUMBER	
400 Series Idler End Bracket (Decorator type)	9500685	

Headrail Adaptors

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
CTS40 Kit for Gutter Rail 2" x 2 1/4" (57mm x 51mm) Headrail	1781118	THE STATE OF THE S	Motor/Idler Bracket for 2" x 2 1/4" (57mm x 51mm) Headrail	9500736	M

Miscellaneous Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Plastic Bracket Cover 40P Kit (Acmeda type)	9013780		White Bracket Covers (1.5" SkyLine)	9017911	22
Double SkyLine Bracket Covers (Includes Left and Right Set)	9017267	00			

INTERIOR APPLICATIONS

Sonesse® 30 PoE Accessories Tools

NAME	ITEM NUMBER	
CTS40 Pneumatic Punch/Die for 2" x 2 1/4" (Gutter Rail) Headrail	1781099	

Screws

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
M3.5 x 9mm Screw (Sonesse® 40 WireFree, Sonesse® 30 Wired & WireFree, & Roll Up WireFree Only)	9014066	N. A.	Sonesse® 30-40 Motor Plate Screw- M3 x 6mm Philips Flat-Head Plastite	9026093	

PoE Connectors

NAME	ITEM NUMBER
PoE Shielded RJ45 Female to Female coupler	9028957

Sonesse® 40 PoE Accessories Crowns & Drives

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Crown and Drive Set (Somfy 40mm x 1.5mm Round Tube)	9012224	00	Crown & Drive for RollEase/ZMC 2" Profiled Tube	9016352	0 O @
400 Series Crown and Drive Set (40mm x 0.8mm Octagonal Tube)	9012225	00	400 Series Crown and Rubberized Drive (Somfy 40mm x 1.5mm Round Tube)	9016654	0
400 Series to 500 Series Crown and Drive Adaptor Kit	9013763	Omp	400 Series Crown and Rubberized Drive for 40mm Octagonal Tube	9016655	O 🕖
Soft Drive Wheel 44mm (Acmeda Type)	9013790		Drive Adaptor (for 40mm x 1mm Round Tube)	9132142	
Crown Adaptor 44mm Tube (Acmeda Type)	9013791	0	Crown Adaptor (for 40mm x 1mm Round Tube)	9132143	0



Sonesse® 40 PoE Accessories Crowns & Drives

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
40mm Octagonal Crown for 40mm x 0.8mm Octagonal Tube	9147327	O	400 Series Drive Stop with Screw (Recommended for Use with Soft Drives)	9147894	
Crown (for 40mm x 1.5mm Round Tube)	9147330	0	Anti-Blocking System (ABS) 400 Series Left Rotation	9704138	
Drive for (40mm x 1.5mm Round Tube)	9147544		Anti-Blocking System (ABS) 400 Series Right Rotation	9704139	
Drive (for 40mm x 0.8mm Octagonal Tube)	9147545				

Tubes

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
40mm Round Aluminum Tube (ID 36mm) (20 ft. Max Length)	1781153	2" Profiled Roller Tube (16 ft. Max Length)	1781798	
40mm Octagonal Tube (Minimum Order Length 20')	1781154			

Tube Components

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Cord Take-Up Reel (for RollEase & ZMC XL Series 1.5" Tube)	1780786	0	40mm Fabric/Cord Clip for Roman Shade Applications	9012200	C

Motor Plates

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Sonesse® 30-40 Motor Plate - RollEase 360 R3-R8 10mm x 1.8mm Pin Diameter 6.8mm and Screws	9025996	()	Sonesse® 30-40 Motor Plate - Acmeda 12mm and Screws	9025999	6.5
Sonesse® 40 Motor Plate - Rollease 580 R16-24 15.9mm x 1.8mm & Screws	9025997		Sonesse® 30-40 Motor Plate - Rollease RBGAL 16x3.2mm & Screws	9026000	是

INTERIOR APPLICATIONS

Sonesse® 40 PoE Accessories Motor Plates

NAME	ITEM NUMBER	
Sonesse® 30-40 Motor Plate - R3-R8 10mm x 1.8mm Pin Diar and Screws		8
Sonesse® 30-40 Motor Plate - SkyLine and Screws	RollEase 9026003	93

NAME	ITEM NUMBER	
Sonesse® 30-40 Motor Plate - Rollease 360 R3-R8 10mm x 1.6mm & Screws	9026005	

Adaptor Plates

NAME	ITEM NUMBER	
R8 Adaptor Plate	9012258	Q + Q
Motor Adaptor Plate (Acmeda Type) and Screws	9013789	

NAME	ITEM NUMBER	
R8 Adaptor Plate with Screws	9014073	* + *

Motor Head Covers

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Sonesse® 30 24V Motor Head Cover, White (Supplied with Motor)	9027132	\mathcal{O}	Sonesse® 30 24V Motor Head Cover, Black	9027134	
Sonesse® 30 24V Motor Head Cover, Grey	9027133	0			

Idler End Caps

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
End Cap for 40mm Octagonal Tube	9012274	0	Idler End Plug 44mm Tube (Acmeda Type)	9013774	6
RollEase 38mm Tube R8 End Cap	9012276	T:	Idler End Plug (8mm Diameter Pin - Decorator Type)	9500688	=



Sonesse® 40 PoE Accessories Motor Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
RollEase 1.5" Bracket Kit R8 Series for Somfy 40mm Round Tube	9012311		RollEase Silent Motor Mount Clip for SkyLine Bracket	9017255	9
RollEase 2" Bracket Kit R8 Series for Somfy 2" Round Tube	9012313		Sonesse® 40 WireFree to 500 Series Motor Starhead Adaptor Bracket	9027508	(13)
Motor & Idler Bracket Kit 40P (Acmeda type)	9013778	DD	10mm Square Motor Bracket for 400S Motors	9147334	el-
Dual Motor and Idler Bracket Kit (Acmeda type)	9013782	86	LO Motor Bracket for 400S Motors	9147337	
RollEase 2" SkyLine Universal Motor Bracket and Idler Bracket	9016325		400 Series Motor Bracket (Decorator Type)	9500683	50

Intermediate Brackets

NAME	ITEM NUMBER	
Intermediate Bracket (Decorator Type)	9500687	

Intermediate End Plugs

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Intermediate Female Idler End Plug (Acmeda type)	9013785	30	Intermediate Male Idler End Plug (Acmeda type)	9013786	36

Idler Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
400 Series Idler End Bracket (Decorator type)	9500685		Idler Adaptor Collar for 2* Profiled Tube	9016366	1

Idler Adaptors

INTERIOR APPLICATIONS

Sonesse® 40 PoE Accessories

Headrail Adaptors

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
CTS40 Kit for Gutter Rail 2" x 2 1/4" (57mm x 51mm) Headrail	1781118	W	Ladder Braid Crimps for CTS40 System	9163292	The state of the s
CTS Cone for 40mm Octagonal Tube	9162144	3	Motor/Idler Bracket for 2" x 2 1/4" (57mm x 51mm) Headrail	9500736	M

Miscellaneous Brackets

NAME	ITEM NUMBER	NAME	ITEM NUMBER
Plastic Bracket Cover 40P Kit (Acmeda type)	9013780	White Bracket Covers (2" SkyLine)	9016326

Support Clips

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
2" Slat Support Clips for Wood Blinds (White)	1781134	 CTS40 Pneumatic Punch/Die for 2" x 2 1/4" (Gutter Rail) Headrail	1781099	

Tools

Screws

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
M3.5 x 9mm Screw (Sonesse® 40 WireFree, Sonesse® 30 Wired & WireFree, & Roll Up WireFree Only)	9014066	1	Sonesse® 30-40 Motor Plate Screw- M3 x 6mm Philips Flat-Head Plastite	9026093	

PoE Connectors

NAME	ITEM NUMBER	
PoE Shielded RJ45 Female to Female coupler	9028957	Tar.



Somfy Digital Network™ (SDN) PowerConnect™ Surface-Mount Panel

SDN PowerConnect™ Surface-Mount Panel 1871026

Somfy Digital Network™ (SDN) PowerConnect™ Rack-Mount Panels

NAME ITEM NUMBER

SDN PowerConnect™ Rack-Mount Panel 1871027

Power & Data Cables

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
SDN Low-voltage Power & Data Cable, Non-Plenum Rated	9020126	SDN Low-Voltage Power & Data Cable, Plenum Rated	9020127	

Power Supplies

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
24V DC 1.67A Wall Mount Power Supply	1822209	0	Power Distribution Enclosure Kit - 15 Motor	1870197	
Power Distribution Enclosure Kit - 10 Motor	1870192	19	Power Distribution Enclosure Kit - 20 Motor	1870198	
Power Distribution Enclosure Kit - 5 Motor	1870196	13			

Crowns & Drives

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
400 Series Crown and Drive Set (40mm x 0.8mm Octagonal Tube)	9012225	O	Sonesse® 30 WireFree to 400 Series Adaptor Kit	9020676	0
Crown & Drive Set Adaptor for Hunter Douglas 4" Silhouette (Quartette)	9016953	0	Hunter Douglas 37mm Crown & Drive	9020699	0
RollEase 1.5" Crown & Drive	9020674	0	Crown & Drive for RollEase/ZMC 2" Profiled Tube	9021017	00.
Louvolite 40mm Crown & Drive	9020675	000	Acmeda 45 Crown & Drive	9021018	0-0

Crowns & Drives

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Acmeda 45 Heavy Duty Crown & Drive	9021036	0-0	Louvolite 45mm Crown & Drive	9025811	000

Tubes

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
44mm Aluminum Tube (Acmeda) (Minimum Order Length 16')	1780688	40mm Octagonal Tube (Minimum Order Length 20')	1781154	
40mm Round Aluminum Tube (ID 36mm) (20 ft. Max Length)	1781153	RollEase 1.5" Roller Tube (16 ft. Lengths)	9017913	

Tube Components

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Cord Take-Up Reel (for RollEase & ZMC XL Series 1.5" Tube)	1780786	0	40mm Fabric/Cord Clip for Roman Shade Applications	9012200	C
Cord Take-Up Reel (for Acmeda 44mm Tube)	1781898	0			

Motor Plates

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Sonesse® 30-40 Motor Plate - RollEase 360 R3-R8 10mm x 1.8mm Pin Diameter 6.8mm and Screws	9025996	()	Sonesse® 30-40 Motor Plate - Rollease 360 R3-R8 10mm x 1.8mm Pin Diameter 7mm and Screws	9026001	()
Sonesse® 30-40 Motor Plate - Acmeda 12mm and Screws	9025999	850	Sonesse® 30-40 Motor Plate - RollEase SkyLine and Screws	9026003	93



Adaptor Plates

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
R8 Adaptor Plate	9012258	0. # C	R8 Adaptor Plate with Screws	9014073	0 + C
Louvolite Adaptor Plate	9013958	(3)	Motor Adaptor Plate for RollEase SkyLine & ZMC XL Series Brackets	9016378	0.3

Motor Head Covers

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Sonesse® 30 24V Motor Head Cover, White (Supplied with Motor)	9027132		Sonesse® 30 24V Motor Head Cover, Black	9027134	
Sonesse® 30 24V Motor Head Cover, Grey	9027133	0			

Idler End Caps

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
End Cap for 40mm Octagonal Tube	9012274	0	Collapsible End Plug (for Louvolite System 45)	9015555	46
Collapsible End Plug (for Louvolite System 40 & ZMC RS Series)	9013716	40	RollEase Heavy Duty Spring Idler End Pin (1.5" Tube)	9017912	
Idler End Plug 44mm Tube (Acmeda Type)	9013774	1	Idler End Plug (8mm Diameter Pin - Decorator Type)	9500688	E 10

Motor Brackets

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
RollEase 1.5" Bracket Kit R8 Series for Somfy 40mm Round Tube	9012311	Motor and Idler Bracket Kit (for Louvolite System 40 & ZMC RS Series)	9013715	100
RollEase 2" Bracket Kit R8 Series for Somfy 2" Round Tube	9012313	Dual Motor and Idler Bracket Kit (Acmeda type)	9013782	66

Motor Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Motor and Idler Bracket Kit (for Louvolite System 45)	9015554	DB	RollEase 1.5" SkyLine Bracket (2 Required)	9017910	
Double SkyLine Bracket (Includes Left and Right Set)	9016616		400 Series Motor Bracket (Decorator Type)	9500683	(S)()

Intermediate Brackets

NAME	ITEM NUMBER	
Intermediate Bracket (Decorator Type)	9500687	

Intermediate End Plugs

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Intermediate Female Idler End Plug (Acmeda type)	9013785	30	Intermediate Male Idler End Plug (Acmeda type)	9013786	30

Idler Brackets

NAME	ITEM NUMBER	
400 Series Idler End Bracket (Decorator type)	9500685	

Headrail Adaptors

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
CTS40 Kit for Gutter Rail 2" x 2 1/4" (57mm x 51mm) Headrail	1781118	THE STATE OF THE S	Motor/Idler Bracket for 2" x 2 1/4" (57mm x 51mm) Headrail	9500736	M



Miscellaneous Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Plastic Bracket Cover 40P Kit (Acmeda type)	9013780		White Bracket Covers (1.5* SkyLine)	9017911	22
Double SkyLine Bracket Covers (Includes Left and Right Set)	9017267	00			

Tools

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
CTS40 Pneumatic Punch/Die for 2" x 2 1/4" (Gutter Rail) Headrail	1781099	RS485 Motor Limit Setting & Address Reader Tool	9017142	Toolson on the same of the sam
Limit Setting Tool (for use with Sonesse® 30 Dry Contact/RS485, Glydea® ULTRA & Irismo™ DCT)	9014599	RS485 Sonesse® ULTRA 50 DC Setting Tool Cable, 20 ft.	9019873	

Screws

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
M3.5 x 9mm Screw (Sonesse® 40 WireFree, Sonesse® 30 Wired & WireFree, & Roll Up WireFree Only)	9014066	Ar	Sonesse® 30-40 Motor Plate Screw- M3 x 6mm Philips Flat-Head Plastite	9026093	

Connectors

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
SDN Weidmuller 5-position Male Field Installable Connector	9020743	1111	Weidmüller 2-Position Connector	9027985	
SDN Weidmuller 5-position Female Field Installable Connector	9025113	1000			

Sonesse® ULTRA 50 DC Accessories

1871026 SDN PowerConnect™ Surface-Mount Panel



Somfy Digital Network™ (SDN) PowerConnect™
Surface-Mount Panel

NAME

Somfy Digital Network™ (SDN) PowerConnect™
Rack-Mount Panels

NAME	ITEM NUMBER	
SDN PowerConnect™ Rack-Mount Panel	1871027	

Power Cables

NAME	ITEM NUMBER	
Sonesse® ULTRA 50 DC RTS Cable Power Pigtail	9020005	\$

Power & Data Cables

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Sonesse® ULTRA 50 DC RS485 Cable Data and Power Pigtail	9020004	2	SDN Low-Voltage Power & Data Cable, Plenum Rated	9020127	
SDN Low-voltage Power & Data Cable, Non-Plenum Rated	9020126				

Power Supplies

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
24V DC 1.67A Wall Mount Power Supply	1822209	Q	Power Distribution Enclosure Kit - 15 Motor	1870197	
Power Distribution Enclosure Kit - 10 Motor	1870192	19	Power Distribution Enclosure Kit - 20 Motor	1870198	
Power Distribution Enclosure Kit - 5 Motor	1870196	13			



Sonesse® ULTRA 50 DC Accessories

Crowns & Drives

Sonesse® 50 Drive Wheel 50mm x 1.5mm
Soft Clip- Quiet Accessory for Sonesse® 9018455
Motors

ZMC 2" Grooved Tube Drive Wheel for Sonesse® ULTRA 50 Motors

9020964

Tubes

NAME	ITEM NUMBER	
ZMC 2" Grooved Motor Tube (Sold per Foot)	9020965	

Idler End Caps

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Sonesse® ULTRA 50 DC Universal Short Idler End (10mm)	9020959	0	Spacer for Sonesse® ULTRA 50 Universal Pin End (10mm)	9020960	

Intermediate Brackets

Idler Brackets

Motor Brackets

NAME	ITEM NUMBER	NAME	ITEM NUMBER
Sonesse® ULTRA 50 DC Motor Bracket with Spring Ring	9020957	Sonesse® ULTRA 50 DC Intermediate Bracket (10mm)	9020961

Intermediate End Plugs

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Sonesse® ULTRA 50 DC Intermediate & Indexable Coupler (10mm Shaft)	9020962	BORA	Sonesse® ULTRA 50 DC Idler Bracket (10mm Ball)	9020958	

Miscellaneous Brackets

NAME	ITEM NUMBER	
Sonesse® ULTRA 50 DC Motor & Idler Bracket Cover	9020963	00

Sonesse® ULTRA 50 DC Accessories

Tools

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
RS485 Motor Limit Setting & Address Reader Tool	9017142	RS485 Sonesse® ULTRA 50 DC Setting Tool Cable, 20 ft.	9019873	

Connectors

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
SDN Weidmuller 5-position Male Field Installable Connector	9020743	1111	Weidmüller 2-Position Connector	9027985	
SDN Weidmuller 5-position Female Field Installable Connector	9025113	100			

Roll Up Wired R28 DC Accessories

Crowns & Drives

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Crown for RollEase & ZMC XL Series 1.25" Tube (Legacy)	9018474		Crown for Louvolite & ZMC RS Series 1 5/8" Tube (Legacy)	9018588	0
Crown for RollEase & ZMC XL Series 1.5" Tube (Legacy)	9018475	0	Drive for Shangri-La /Vienna Tube (Legacy)	9018597	
Drive for RollEase & ZMC XL Series 1.25" Tube (Legacy)	9018476		Crown for Shangri-La /Vienna (New Style) Tube	9019851	O
Drive for RollEase & ZMC XL Series 1.5" Tube (Legacy)	9018477	= 15	Drive for Shangri-La /Vienna (New Style) Tube (Legacy)	9019852	
Drive for 26.1mm Tube	9018478	N. C.	Silhouette Crown & Drive	9025816	00
Crown for Shangri-La /Vienna Tube (Not Compatible with Sonesse® 30 WireFree) (Legacy)	9018587	0			



Roll Up 24 WireFree™ (Li-ion) Accessories

Power Supplies - Chargers

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Extension Charging Cable, 8" (For Cassette Applications) (V2 Head)	9021131	?	Magnetic Rigid Cable (for V2 Li-ion)	9028560	0
Lithium-ion Charger (V2 Head)	9025166		Magnetic Adaptor (for V2 Li-ion)	9028562	.6
WireFree Li-ion Solar Panel Kit (Includes Solar Panel, Brackets, and Glass Mount Adhesive)	9027294				

Crowns & Drives

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Crown & Drive for Louvolite 32	9025710	000	Crown & Drive for 28mm Tube	9025744	
Crown & Drive for RollEase 1.25" (32mm)	9025711		Crown & Drive for HD 31mm Tube	9025745	00
Crown & Drive for RollEase 1.125" (28mm)	9025712	000			

Motor Plates

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Motor Plate (Starhole)	9025713	0.30	Motor Plate for SkyLine	9025737	
Motor Plate (with Ears)	9025735	3.	Motor Plate Pin (6mm x 3mm)	9025738	0150
Motor Plate for Louvolite 32	9025736	CP			

Sonesse® 28 WireFree (Li-ion) Accessories Power Supplies - Chargers

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Extension Charging Cable, 8" (For Cassette Applications) (V2 Head)	9021131	2	Magnetic Rigid Cable (for V2 Li-ion)	9028560	0
Lithium-ion Charger (V2 Head)	9025166		Magnetic Adaptor (for V2 Li-ion)	9028562	.0
WireFree Li-ion Solar Panel Kit (Includes Solar Panel, Brackets, and Glass Mount Adhesive)	9027294				

Crowns & Drives

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Crown & Drive Set Adaptor for Hunter Douglas 4" Silhouette (Quartette)	9016953	0	Louvolite 45mm Crown & Drive	9025811	00
RollEase 1.5" Crown & Drive	9020674	0	Hunter Douglas 31mm Crown & Drive	9025812	0
Louvolite 40mm Crown & Drive	9020675	000	Vignette Crown & Drive	9025813	000
Sonesse® 30 WireFree to 400 Series Adaptor Kit	9020676	0	RollEase 1.25" Crown & Drive	9025815	0
Hunter Douglas 37mm Crown & Drive	9020699	0	Silhouette Crown & Drive	9025816	00
Crown & Drive for RollEase/ZMC 2" Profiled Tube	9021017	00.	Crown & Drive Adaptor Kit for Shangri-la (New Style Tube)	9026395	06
Acmeda 45 Crown & Drive	9021018	0-0	Crown & Drive Adaptor Kit for Shangri-la (Older Style Tube)	9026396	03
Acmeda 45 Heavy Duty Crown & Drive	9021036	0-0	Crown & Drive Set Adaptor for 26.1mm Tube	9026644	0



Sonesse® 28 WireFree (Li-ion) Accessories

Tubes

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
44mm Aluminum Tube (Acmeda) (Minimum Order Length 16')	1780688	RollEase 1.5" Roller Tube (16 ft. Lengths)	9017913	

Tube Components

NAME	ITEM NUMBER		NAME	ITEM NUMBER
Cord Take-Up Reel (for RollEase & ZMC XL Series 1.5" Tube)	1780786	0	40mm Fabric/Cord Clip for Roman Shade Applications	9012200
Cord Take-Up Reel (for Acmeda 44mm Tube)	1781898	0		

Adaptor Plates

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
Motor Adaptor Plate (Acmeda Type) and Screws	9013789	Motor Adaptor Plate for RollEase SkyLine & ZMC XL Series Brackets	9016378	

Idler End Caps

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Collapsible End Plug (for Louvolite System 40 & ZMC RS Series)	9013716	40	RollEase Heavy Duty Spring Idler End Pin (1.5" Tube)	9017912	0
Idler End Plug 44mm Tube (Acmeda Type)	9013774	6			

Motor Brackets

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
Motor and Idler Bracket Kit (for Louvolite System 40 & ZMC RS Series)	9013715	Motor & Idler Bracket Kit 40P (Acmeda type)	9013778	DE

Sonesse® 28 WireFree (Li-ion) Accessories Motor Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Dual Motor and Idler Bracket Kit (Acmeda type)	9013782	66	Double SkyLine Bracket (Includes Left and Right Set)	9016616	
Motor and Idler Bracket Kit (for Louvolite System 45)	9015554	DID	RollEase 1.5" SkyLine Bracket (2 Required)	9017910	

Miscellaneous Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Plastic Bracket Cover 40P Kit (Acmeda type)	9013780		White Bracket Covers (1.5" SkyLine)	9017911	00
Double SkyLine Bracket Covers (Includes Left and Right Set)	9017267	70			

Screws

NAME	ITEM NUMBER	
M3.5 x 9mm Screw (Sonesse® 40 WireFree, Sonesse® 30 Wired & WireFree, & Roll Up WireFree Only)	9014066	N. A.

Roll Up 28 WireFree™ (Li-ion) Accessories

Power Supplies - Chargers

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Extension Charging Cable, 8" (For Cassette Applications) (V2 Head)	9021131	2	Magnetic Rigid Cable (for V2 Li-ion)	9028560	0
Lithium-ion Charger (V2 Head)	9025166		Magnetic Adaptor (for V2 Li-ion)	9028562	.6
WireFree Li-ion Solar Panel Kit (Includes Solar Panel, Brackets, and Glass Mount Adhesive)	9027294				



Roll Up 28 WireFree™ (Li-ion) Accessories Crowns & Drives

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Crown & Drive Set Adaptor for Hunter Douglas 4" Silhouette (Quartette)	9016953		Louvolite 45mm Crown & Drive	9025811	00
Drive for Louvolite & ZMC RS Series 1 5/8" Tube (Includes Motor Adaptor Plate) (Legacy)	9018598		Hunter Douglas 31mm Crown & Drive	9025812	0
RollEase 1.5" Crown & Drive	9020674	0	Vignette Crown & Drive	9025813	000
Louvolite 40mm Crown & Drive	9020675	000	RollEase 1.25" Crown & Drive	9025815	0
Sonesse® 30 WireFree to 400 Series Adaptor Kit	9020676	0.	Silhouette Crown & Drive	9025816	00
Hunter Douglas 37mm Crown & Drive	9020699	00	Crown & Drive Adaptor Kit for Shangri-la (New Style Tube)	9026395	06
Crown & Drive for RollEase/ZMC 2" Profiled Tube	9021017	00.	Crown & Drive Adaptor Kit for Shangri-la (Older Style Tube)	9026396	03
Acmeda 45 Crown & Drive	9021018	0-0	Crown & Drive Set Adaptor for 26.1mm Tube	9026644	0
Acmeda 45 Heavy Duty Crown & Drive	9021036	0-0			

Tubes

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
44mm Aluminum Tube (Acmeda) (Minimum Order Length 16')	1780688	RollEase 1.5" Roller Tube (16 ft. Lengths)	9017913	

Roll Up 28 WireFree™ (Li-ion) Accessories

Tube Components

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Cord Take-Up Reel (for RollEase & ZMC XL Series 1.5" Tube)	1780786	0	40mm Fabric/Cord Clip for Roman Shade Applications	9012200	C
Cord Take-Up Reel (for Acmeda 44mm Tube)	1781898	0			

Adaptor Plates

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
Motor Adaptor Plate (Acmeda Type) and Screws	9013789	Motor Adaptor Plate for RollEase SkyLine & ZMC XL Series Brackets	9016378	

Idler End Caps

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Collapsible End Plug (for Louvolite System 40 & ZMC RS Series)	9013716	46	RollEase Heavy Duty Spring Idler End Pin (1.5" Tube)	9017912	0
Idler End Plug 44mm Tube (Acmeda Type)	9013774	6			

Motor Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Motor and Idler Bracket Kit (for Louvolite System 40 & ZMC RS Series)	9013715	100	Double SkyLine Bracket (Includes Left and Right Set)	9016616	
Motor & Idler Bracket Kit 40P (Acmeda type)	9013778	DB	RollEase 1.5" SkyLine Bracket (2 Required)	9017910	
Dual Motor and Idler Bracket Kit (Acmeda type)	9013782	66			



Roll Up 28 WireFree™ (Li-ion) Accessories

Miscellaneous Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBEI
Plastic Bracket Cover 40P Kit (Acmeda type)	9013780		White Bracket Covers (1.5" SkyLine)	9017911
Double SkyLine Bracket Covers (Includes Left and Right Set)	9017267	00		

Screws

NAME	ITEM NUMBER	
M3.5 x 9mm Screw (Sonesse® 40 WireFree, Sonesse® 30 Wired & WireFree, & Roll Up WireFree Only)	9014066	N. A.

Sonesse® ULTRA 30 WireFree (Li-ion) Accessories

Power Supplies - Chargers

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Extension Charging Cable, 8* (For Cassette Applications) (V2 Head)	9021131	?	Magnetic Rigid Cable (for V2 Li-ion)	9028560	0
Lithium-ion Charger (V2 Head)	9025166		Magnetic Adaptor (for V2 Li-ion)	9028562	.0
WireFree Li-ion Solar Panel Kit (Includes Solar Panel, Brackets, and Glass Mount Adhesive)	9027294				

Crowns & Drives

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Crown & Drive Set Adaptor for Hunter Douglas 4" Silhouette (Quartette)	9016953	0	Louvolite 40mm Crown & Drive	9020675	000
RollEase 1.5" Crown & Drive	9020674	0	Sonesse® 30 WireFree to 400 Series Adaptor Kit	9020676	0

Sonesse® ULTRA 30 WireFree (Li-ion) Accessories Crowns & Drives

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Hunter Douglas 37mm Crown & Drive	9020699	0	Acmeda 45 Heavy Duty Crown & Drive	9021036	0-0
Crown & Drive for RollEase/ZMC 2" Profiled Tube	9021017	00.	Louvolite 45mm Crown & Drive	9025811	000
Acmeda 45 Crown & Drive	9021018	0-0			

Tubes

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
44mm Aluminum Tube (Acmeda) (Minimum Order Length 16')	1780688	RollEase 1.5" Roller Tube (16 ft. Lengths)	9017913	

Tube Components

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Cord Take-Up Reel (for RollEase & ZMC XL Series 1.5" Tube)	1780786	0	40mm Fabric/Cord Clip for Roman Shade Applications	9012200	C
Cord Take-Up Reel (for Acmeda 44mm Tube)	1781898	0			

Adaptor Plates

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
Motor Adaptor Plate (Acmeda Type) and Screws	9013789	Motor Adaptor Plate for RollEase SkyLine & ZMC XL Series Brackets	9016378	2.0



Sonesse® ULTRA 30 WireFree (Li-ion) Accessories Idler End Caps

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Collapsible End Plug (for Louvolite System 40 & ZMC RS Series)	9013716	40	RollEase Heavy Duty Spring Idler End Pin (1.5" Tube)	9017912	0
Idler End Plug 44mm Tube (Acmeda Type)	9013774	9			

Motor Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Motor and Idler Bracket Kit (for Louvolite System 40 & ZMC RS Series)	9013715	100	Double SkyLine Bracket (Includes Left and Right Set)	9016616	
Motor & Idler Bracket Kit 40P (Acmeda type)	9013778		RollEase 1.5" SkyLine Bracket (2 Required)	9017910	
Dual Motor and Idler Bracket Kit (Acmeda type)	9013782	66			

Miscellaneous Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Plastic Bracket Cover 40P Kit (Acmeda type)	9013780		White Bracket Covers (1.5* SkyLine)	9017911	00
Double SkyLine Bracket Covers (Includes Left and Right Set)	9017267	00			

Screws

NAME	ITEM NUMBER	
M3.5 x 9mm Screw (Sonesse® 40 WireFree, Sonesse® 30 Wired & WireFree, & Roll Up WireFree Only)	9014066	A

Sonesse® 40 WireFree (Li-ion) Accessories Power Supplies - Chargers

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Extension Charging Cable, 8" (For Cassette Applications) (V2 Head)	9021131	~	USB-C Magnetic Rigid Cable	9028563	Ó
Lithium-ion Charger (V2 Head)	9025166		USB-C Magnetic Adaptor	9028564	F
WireFree Li-ion Solar Panel Kit (Includes Solar Panel, Brackets, and Glass Mount Adhesive)	9027294		USB-C Li-ion Extension Cable	9028565	9
Magnetic Rigid Cable (for V2 Li-ion)	9028560	0	USB-C Li-ion Fast Charger (with Cable)	9028923	10
Magnetic Adaptor (for V2 Li-ion)	9028562	.0			

Crowns & Drives

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Crown and Drive Set (Somfy 40mm x 1.5mm Round Tube)	9012224		400 Series Crown and Rubberized Drive for 40mm Octagonal Tube	9016655	O 🌘
400 Series Crown and Drive Set (40mm x 0.8mm Octagonal Tube)	9012225		Crown & Drive Set Adaptor for Hunter Douglas 4" Silhouette (Quartette)	9016953	0
400 Series to 500 Series Crown and Drive Adaptor Kit	9013763	0.0	Drive Adaptor (for 40mm x 1mm Round Tube)	9132142	
Soft Drive Wheel 44mm (Acmeda Type)	9013790		Crown Adaptor (for 40mm x 1mm Round Tube)	9132143	0
Crown Adaptor 44mm Tube (Acmeda Type)	9013791	0	40mm Octagonal Crown for 40mm x 0.8mm Octagonal Tube	9147327	O
Crown & Drive for RollEase/ZMC 2" Profiled Tube	9016352	00	Crown (for 40mm x 1.5mm Round Tube)	9147330	0
400 Series Crown and Rubberized Drive (Somfy 40mm x 1.5mm Round Tube)	9016654		Drive for (40mm x 1.5mm Round Tube)	9147544	



Sonesse® 40 WireFree (Li-ion) Accessories Crowns & Drives

NAME	ITEM NUMBER		NAME	ITEM NUMBER
Drive (for 40mm x 0.8mm Octagonal Tube)	9147545	A STATE OF THE STA	400 Series Drive Stop with Screw (Recommended for Use with Soft Drives)	9147894

Tubes

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
40mm Round Aluminum Tube (ID 36mm) (20 ft. Max Length)	1781153	2" Profiled Roller Tube (16 ft. Max Length)	1781798	
40mm Octagonal Tube (Minimum Order Length 20')	1781154			

Tube Components

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Cord Take-Up Reel (for RollEase & ZMC XL Series 1.5" Tube)	1780786	0	40mm Fabric/Cord Clip for Roman Shade Applications	9012200	C

Motor Plates

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Sonesse® 30-40 Motor Plate - RollEase 360 R3-R8 10mm x 1.8mm Pin Diameter 6.8mm and Screws	9025996	850	Sonesse® 30-40 Motor Plate - Rollease 360 R3-R8 10mm x 1.8mm Pin Diameter 7mm and Screws	9026001	(X)
Sonesse® 40 Motor Plate - Rollease 580 R16-24 15.9mm x 1.8mm & Screws	9025997	5	Sonesse® 30-40 Motor Plate - RollEase SkyLine and Screws	9026003	93
Sonesse® 30-40 Motor Plate - Acmeda 12mm and Screws	9025999	6.79	Sonesse® 30-40 Motor Plate - Rollease 360 R3-R8 10mm x 1.6mm & Screws	9026005	000
Sonesse® 30-40 Motor Plate - Rollease RBGAL 16x3.2mm & Screws	9026000	二。			

Sonesse® 40 WireFree (Li-ion) Accessories Adaptor Plates

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
R8 Adaptor Plate	9012258	中中	R8 Adaptor Plate with Screws	9014073	0. + 0.
Motor Adaptor Plate (Acmeda Type) and Screws	9013789		Motor Adaptor Plate for RollEase SkyLine & ZMC XL Series Brackets	9016378	0.0

Motor Head Covers

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Sonesse® 40 WireFree Motor Head Cover, White (Supplied with Motor)	9028931		Sonesse® 40 WireFree Motor Head Cover, Grey	9028933	
Sonesse® 40 WireFree Motor Head Cover, Black	9028932	0			

Idler End Caps

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
End Cap for 40mm Octagonal Tube	9012274	0	Idler End Plug 44mm Tube (Acmeda Type)	9013774	6
RollEase 38mm Tube R8 End Cap	9012276	T.	Idler End Plug (8mm Diameter Pin - Decorator Type)	9500688	E .

Motor Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
RollEase 1.5" Bracket Kit R8 Series for Somfy 40mm Round Tube	9012311		Dual Motor and Idler Bracket Kit (Acmeda type)	9013782	26
RollEase 2" Bracket Kit R8 Series for Somfy 2" Round Tube	9012313		RollEase 2" SkyLine Universal Motor Bracket and Idler Bracket	9016325	
Motor & Idler Bracket Kit 40P (Acmeda type)	9013778	DB	RollEase Silent Motor Mount Clip for SkyLine Bracket	9017255	



Sonesse® 40 WireFree (Li-ion) Accessories Motor Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Sonesse® 40 WireFree to 500 Series Motor Starhead Adaptor Bracket	9027508	433	400 Series to 500 Series Motor Mounting Conversion Bracket	9500659	
10mm Square Motor Bracket for 400S Motors	9147334	al	400 Series Motor Bracket (Decorator Type)	9500683	(S.O)
LO Motor Bracket for 400S Motors	9147337	. 00 00			

Intermediate Brackets

NAME	ITEM NUMBER	
Intermediate Bracket (Decorator Type)	9500687	

Intermediate End Plugs

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Intermediate Female Idler End Plug (Acmeda type)	9013785	30	Intermediate Male Idler End Plug (Acmeda type)	9013786	36

Idler Brackets

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
400 Series Idler End Bracket (Decorator type)	9500685	Idler Adaptor Collar for 2* Profiled Tube	9016366	0

Idler Adaptors

Headrail Adaptors

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
CTS40 Kit for Gutter Rail 2" x 2 1/4" (57mm x 51mm) Headrail	1781118	W	CTS Cone for 40mm Octagonal Tube	9162144	3

Sonesse® 40 WireFree (Li-ion) Accessories

Headrail Adaptors

NAME	ITEM NUMBER	
Ladder Braid Crimps for CTS40 System	9163292	4

NAME	ITEM NUMBER	
Motor/Idler Bracket for 2" x 2 1/4" (57mm x 51mm) Headrail	9500736	M

Miscellaneous Brackets

NAME	ITEM NUMBER	
Plastic Bracket Cover 40P Kit (Acmeda type)	9013780	

NAME	ITEM NUMBER	
White Bracket Covers (2" SkyLine)	9016326	00

Support Clips

2" Slat Support Clips for Wood Blinds (White)

Tools

NAME	ITEM NUMBER	
CTS40 Pneumatic Punch/Die for 2" x 2 1/4" (Gutter Rail) Headrail	1781099	

Screws

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
M3.5 x 9mm Screw (Sonesse® 40 WireFree, Sonesse® 30 Wired & WireFree, & Roll Up WireFree Only)	9014066	N. A.	Sonesse® 40 M4 x 8mm Motor Head Screw - 29mm Spaced Holes	9026094	Product Image Coming Soon
Sonesse® 30-40 Motor Plate Screw- M3 x 6mm Philips Flat-Head Plastite	9026093	11			

Sonesse® 28 WireFree (External Battery) Accessories Power Cables

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Power Extension Cable for External Battery Motor, 48" (122cm)	9016736	Les.	Power Extension Cable for External Battery Motor, 96" (244cm)	9018624	40
Power Extension Cable for External Battery Motor, 10" (25cm)	9018623	5			



Sonesse® 28 WireFree (External Battery) Accessories Power Supplies

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
12V DC Plug-in Power Supply	1870940	12V DC Reloadable Battery Tube	9018685	- 0
8 AA Lithium Battery Package (for Battery Tube 9018685)	9014834	Rechargeable Lithium-ion Battery Pack (for External Battery WireFree Motors)	9021217	1

Power Supplies - Chargers

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Extension Charging Cable, 8" (For Cassette Applications) (V2 Head)	9021131	?	Magnetic Rigid Cable (for V2 Li-ion)	9028560	0
Lithium-ion Charger (V2 Head)	9025166		Magnetic Adaptor (for V2 Li-ion)	9028562	.0
WireFree Li-ion Solar Panel Kit (Includes Solar Panel, Brackets, and Glass Mount Adhesive)	9027294				

Miscellaneous Power Supplies

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Wall Mounting Clips for Battery Tubes (Optional)	9013263	7070	Y Harness for Dual Reloadable Battery Tube (10"/30" offset)	9018626	< ? ®
Silhouette Mounting Clips for Battery Tubes (Set of 2)	9013264		Y Harness (Optional) 48" (120cm)	9018629	79
Shangri-La Mounting Clips for Battery Tubes (Set of 2)	9013266	44	Replacement Battery Clips for (Li-ion) Battery Pack (9021217)	9027701	6568
Y Harness for Dual Reloadable Battery Tube	9018625	H			

Sonesse® 28 WireFree (External Battery) Accessories Crowns & Drives

ITEM NUMBER		NAME	ITEM NUMBER	
9016953	O P	Louvolite 45mm Crown & Drive	9025811	00
9020674	0	Hunter Douglas 31mm Crown & Drive	9025812	0
9020675	000	Vignette Crown & Drive	9025813	000
9020676	0.	RollEase 1.25" Crown & Drive	9025815	0
9020699	0	Silhouette Crown & Drive	9025816	00
9021017	00.	Crown & Drive Adaptor Kit for Shangri-la (New Style Tube)	9026395	00
9021018	0-0	Crown & Drive Adaptor Kit for Shangri-la (Older Style Tube)	9026396	03
9021036	0-0	Crown & Drive Set Adaptor for 26.1mm Tube	9026644	0
	9016953 9020674 9020675 9020676 9020699 9021017	9016953 9020674 9020675 9020676 9020699 9021017 9021018	9016953 Louvolite 45mm Crown & Drive 9020674 Hunter Douglas 31mm Crown & Drive 9020675 Vignette Crown & Drive 9020676 RollEase 1.25" Crown & Drive 9020699 Silhouette Crown & Drive 9021017 Crown & Drive Adaptor Kit for Shangri-la (New Style Tube) 9021018 Crown & Drive Adaptor Kit for Shangri-la (Older Style Tube) Crown & Drive Adaptor Kit for Shangri-la (Older Style Tube)	9016953 Louvolite 45mm Crown & Drive 9025811 9020674 Hunter Douglas 31mm Crown & Drive 9025812 9020675 Vignette Crown & Drive 9025813 9020676 RollEase 1.25° Crown & Drive 9025815 9020699 Silhouette Crown & Drive 9025816 9021017 Crown & Drive Adaptor Kit for Shangri-la (New Style Tube) 9026395 9021018 Crown & Drive Adaptor Kit for Shangri-la (Older Style Tube) 9026396

Tubes

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
44mm Aluminum Tube (Acmeda) (Minimum Order Length 16')	1780688	RollEase 1.5" Roller Tube (16 ft. Lengths)	9017913	

Tube Components

NAME	ITEM NUMBER		NAME	ITEM NUMBER
Cord Take-Up Reel (for RollEase & ZMC XL Series 1.5" Tube)	1780786	0	Cord Take-Up Reel (for Acmeda 44mm Tube)	1781898



Sonesse® 28 WireFree (External Battery) Accessories Tube Components

NAME	ITEM NUMBER	
40mm Fabric/Cord Clip for Roman Shade Applications	9012200	C

Adaptor Plates

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
Motor Adaptor Plate (Acmeda Type) and Screws	9013789	Motor Adaptor Plate for RollEase SkyLine & ZMC XL Series Brackets	9016378	2.0

Idler End Caps

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Collapsible End Plug (for Louvolite System 40 & ZMC RS Series)	9013716	46	RollEase Heavy Duty Spring Idler End Pin (1.5" Tube)	9017912	0
Idler End Plug 44mm Tube (Acmeda Type)	9013774	6			

Motor Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Motor and Idler Bracket Kit (for Louvolite System 40 & ZMC RS Series)	9013715		Dual Motor and Idler Bracket Kit (Acmeda type)	9013782	bb
Motor & Idler Bracket Kit 40P (Acmeda type)	9013778	DB	RollEase 1.5" SkyLine Bracket (2 Required)	9017910	

Miscellaneous Brackets

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
Plastic Bracket Cover 40P Kit (Acmeda type)	9013780	Double SkyLine Bracket Covers (Includes Left and Right Set)	9017267	77

Sonesse® 28 WireFree (External Battery) Accessories

Miscellaneous Brackets

NAME	ITEM NUMBER	
White Bracket Covers (1.5" SkyLine)	9017911	22

Screws

NAME	ITEM NUMBER	
M3.5 x 9mm Screw (Sonesse® 40 WireFree, Sonesse® 30 Wired & WireFree, & Roll Up WireFree Only)	9014066	A

Roll Up 28 WireFree™ (External Battery) Accessories

Power Cables

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Power Extension Cable for External Battery Motor, 48" (122cm)	9016736	do.	Power Extension Cable for External Battery Motor, 96" (244cm)	9018624	40
Power Extension Cable for External Battery Motor, 10" (25cm)	9018623	5			

Power Supplies

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
12V DC Plug-in Power Supply	1870940	12V DC Reloadable Battery Tube	9018685	0
8 AA Lithium Battery Package (for Battery Tube 9018685)	9014834	Rechargeable Lithium-ion Battery Pack (for External Battery WireFree Motors)	9021217	

Power Supplies - Chargers

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Extension Charging Cable, 8" (For Cassette Applications) (V2 Head)	9021131	?	Lithium-ion Charger (V2 Head)	9025166	



Roll Up 28 WireFree™ (External Battery) Accessories

Power Supplies - Chargers

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
WireFree Li-ion Solar Panel Kit (Includes Solar Panel, Brackets, and Glass Mount Adhesive)	9027294		Magnetic Adaptor (for V2 Li-ion)	9028562	.0
Magnetic Rigid Cable (for V2 Li-ion)	9028560	0			

Miscellaneous Power Supplies

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Wall Mounting Clips for Battery Tubes (Optional)	9013263	7070	Y Harness for Dual Reloadable Battery Tube (10"/30" offset)	9018626	< ?®
Silhouette Mounting Clips for Battery Tubes (Set of 2)	9013264		Y Harness (Optional) 48" (120cm)	9018629	79
Shangri-La Mounting Clips for Battery Tubes (Set of 2)	9013266	44	Replacement Battery Clips for (Li-ion) Battery Pack (9021217)	9027701	8566
Y Harness for Dual Reloadable Battery Tube	9018625	H			

Crowns & Drives

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Crown & Drive Set Adaptor for Hunter Douglas 4" Silhouette (Quartette)	9016953		Sonesse® 30 WireFree to 400 Series Adaptor Kit	9020676	0
Drive for Louvolite & ZMC RS Series 1 5/8" Tube (Includes Motor Adaptor Plate) (Legacy)	9018598		Hunter Douglas 37mm Crown & Drive	9020699	0
RollEase 1.5" Crown & Drive	9020674	0	Crown & Drive for RollEase/ZMC 2" Profiled Tube	9021017	00.
Louvolite 40mm Crown & Drive	9020675	60 0	Acmeda 45 Crown & Drive	9021018	0-0

Roll Up 28 WireFree™ (External Battery) Accessories Crowns & Drives

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Acmeda 45 Heavy Duty Crown & Drive	9021036	0-0	Silhouette Crown & Drive	9025816	Oc
Louvolite 45mm Crown & Drive	9025811	000	Crown & Drive Adaptor Kit for Shangri-la (New Style Tube)	9026395	06
Hunter Douglas 31mm Crown & Drive	9025812	0	Crown & Drive Adaptor Kit for Shangri-la (Older Style Tube)	9026396	03
Vignette Crown & Drive	9025813	000	Crown & Drive Set Adaptor for 26.1mm Tube	9026644	0
RollEase 1.25" Crown & Drive	9025815	0			

Tubes

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
44mm Aluminum Tube (Acmeda) (Minimum Order Length 16')	1780688	RollEase 1.5* Roller Tube (16 ft. Lengths)	9017913	

Tube Components

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Cord Take-Up Reel (for RollEase & ZMC XL Series 1.5" Tube)	1780786	0	40mm Fabric/Cord Clip for Roman Shade Applications	9012200	C
Cord Take-Up Reel (for Acmeda 44mm Tube)	1781898	0			

Adaptor Plates

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
Motor Adaptor Plate (Acmeda Type) and Screws	9013789	Motor Adaptor Plate for RollEase SkyLine & ZMC XL Series Brackets	9016378	2.0



Roll Up 28 WireFree™ (External Battery) Accessories Idler End Caps

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Collapsible End Plug (for Louvolite System 40 & ZMC RS Series)	9013716	QC.	RollEase Heavy Duty Spring Idler End Pin (1.5" Tube)	9017912	0
Idler End Plug 44mm Tube (Acmeda Type)	9013774	0			

Motor Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Motor and Idler Bracket Kit (for Louvolite System 40 & ZMC RS Series)	9013715	100	Dual Motor and Idler Bracket Kit (Acmeda type)	9013782	66
Motor & Idler Bracket Kit 40P (Acmeda type)	9013778		RollEase 1.5" SkyLine Bracket (2 Required)	9017910	

Miscellaneous Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Plastic Bracket Cover 40P Kit (Acmeda type)	9013780		White Bracket Covers (1.5" SkyLine)	9017911	22
Double SkyLine Bracket Covers (Includes Left and Right Set)	9017267	70			

Screws

NAME	ITEM NUMBER	
M3.5 x 9mm Screw (Sonesse® 40 WireFree, Sonesse® 30 Wired & WireFree, & Roll Up WireFree Only)	9014066	N. A.

Cord Lift WireFree™ Accessories

Power Cables

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Power Extension Cable for External Battery Motor, 48" (122cm)	9016736	do	Power Extension Cable for External Battery Motor, 96" (244cm)	9018624	40
Power Extension Cable for External Battery Motor, 10" (25cm)	9018623	N			

Power Supplies

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
12V DC Plug-in Power Supply	1870940	12V DC Reloadable Battery Tube	9018685	- 0
8 AA Lithium Battery Package (for Battery Tube 9018685)	9014834	Rechargeable Lithium-ion Battery Pack (for External Battery WireFree Motors)	9021217	

Power Supplies - Chargers

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Extension Charging Cable, 8" (For Cassette Applications) (V2 Head)	9021131	?	Magnetic Rigid Cable (for V2 Li-ion)	9028560	0
Lithium-ion Charger (V2 Head)	9025166		Magnetic Adaptor (for V2 Li-ion)	9028562	.0
WireFree Li-ion Solar Panel Kit (Includes Solar Panel, Brackets, and Glass Mount Adhesive)	9027294				

Miscellaneous Power Supplies

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Wall Mounting Clips for Battery Tubes (Optional)	9013263	707	Shangri-La Mounting Clips for Battery Tubes (Set of 2)	9013266	4/4
Silhouette Mounting Clips for Battery Tubes (Set of 2)	9013264		Y Harness for Dual Reloadable Battery Tube	9018625	H



Cord Lift WireFree™ Accessories

Miscellaneous Power Supplies

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Y Harness for Dual Reloadable Battery Tube (10"/30" offset)	9018626	< ? O	Replacement Battery Clips for (Li-ion) Battery Pack (9021217)	9027701	6666
Y Harness (Optional) 48" (120cm)	9018629	79			

Headrail Adaptors

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Headrail Adaptor (for Legacy Hunter Douglas EasyRise) (CL32 Only)	9013287	H	Headrail Adaptor for Comfortex/Turnils Global Rail Adaptor (CL32 Only)	9015900	Til.
Headrail Adaptor (for Graber/Bali EasyUp Cord Loop) (CL32 Only)	9013288	44	Headrail Adaptor for Turnils (TL25 Only)	9026427	D
Headrail Adaptor for Kensington Deluxe Cord Loop (CL32 Only)	9013443	H	Headrail Adaptors for HT Window (TL25 Only)	9026429	

Shaft Adaptors

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
5mm Square Shaft Adaptor (CL32 Only)	9013268		V Notch Shaft Adaptor (CL32 Only)	9015899	
Spears Shaft Adaptor (CL32 Only)	9013283		Shaft Adaptor Turnils (TL25 Only)	9026428	
Tape Reel Shaft Adaptor (CL32 Only)	9013284	0	Shaft Adaptor HT Window (TL25 Only)	9026430	
5mm Hex Shaft Adaptor for Somfy CTS (CL32 Only)	9013285				

Tilt WireFree™ Accessories

Power Cables

NAME	ITEM NUMBER	
Power Extension Cable for External Battery Motor, 48" (122cm)	9016736	do
Power Extension Cable for External Battery Motor, 10" (25cm)	9018623	5

NAME	ITEM NUMBER	
Power Extension Cable for External Battery Motor, 96" (244cm)	9018624	40

Power Supplies

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
12V DC Plug-in Power Supply	1870940	12V DC Reloadable Battery Tube	9018685	- 0
8 AA Lithium Battery Package (for Battery Tube 9018685)	9014834	Rechargeable Lithium-ion Battery Pack (for External Battery WireFree Motors)	9021217	1

Power Supplies - Chargers

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Extension Charging Cable, 8" (For Cassette Applications) (V2 Head)	9021131	?	Magnetic Rigid Cable (for V2 Li-ion)	9028560	0
Lithium-ion Charger (V2 Head)	9025166		Magnetic Adaptor (for V2 Li-ion)	9028562	.0
WireFree Li-ion Solar Panel Kit (Includes Solar Panel, Brackets, and Glass Mount Adhesive)	9027294				

Miscellaneous Power Supplies

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Wall Mounting Clips for Battery Tubes (Optional)	9013263	707	Shangri-La Mounting Clips for Battery Tubes (Set of 2)	9013266	4/4
Silhouette Mounting Clips for Battery Tubes (Set of 2)	9013264		Y Harness for Dual Reloadable Battery Tube	9018625	H



Tilt WireFree™ Accessories

Miscellaneous Power Supplies

NAME	ITEM NUMBER		NAME	ITEM NUMBER
Y Harness for Dual Reloadable Battery Tube (10"/30" offset)	9018626	579	Replacement Battery Clips for (Li-ion) Battery Pack (9021217)	9027701
Y Harness (Optional) 48" (120cm)	9018629	79		

Headrail Adaptors

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Headrail Adaptor for Decora Sun Headrail	9025739	00	Low Profile Headrail Adaptor for Through- Shaft	9025743	pp
Gutter Headrail Adaptor for Through-Shaft	9025742	AA			

Shaft Adaptors

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
6mm Hexagonal Shaft Adaptor	9025928		6.4mm Square Shaft Adaptor	9025932	
5.5mm Hexagonal Shaft Adaptor	9025929	(=0	4mm Square Shaft Adaptor	9027060	
5mm Hexagonal Shaft Adaptor	9025930		D Shaft Adaptor	9027062	
6mm Square Shaft Adaptor	9025931	(2)			



NOTES

Drapery Motors




Designed for Silence Glydea ULTRA, the quietest motor available, transforms any room into a private, hushed environment.



Strong Traversing Capacity Powerful enough to easily skim curtains across expansive windows.



Power Options WireFree, Plug-in (AC or DC), and hard-wired (AC) options available.



Smart Home Smartphone app or voice commands enable effortless and convenient control.



Style Flexibility Premium motorized control for Ripplefold,® Pinch Pleat and many of the most popular drapery styles.



Technologies Advanced technology solutions that are easy to install and simple to use.

Glydea® ULTRA Motors

Radio Technology Somfy® (RTS)

Glydea® ULTRA is reliable, adaptable, robust, and discreet. A premium solution to motorize all types of curtains in any residential or commercial space.

Comfort & Convenience

- Reduce glare or enjoy privacy using the quietest motor solution available.
- Strong traversing capacity offers light, fluid movement for heavier curtains.

Energy Saving

- Reduce energy costs automatically by adding sensors or timers.
- Protect valuable furnishings from the sun's damaging UV rays.







Main functions





Soft start-stop



Adjustable speed



Quick & easy settings





MY function



Manual override



Back release



Touch Motion

Compatible end-products



DRAPERIES

NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
GLYDEA® ULTRA 35 MOTOR RTS WITH 10' PLUG	WITHOUT HEAD	0.6	105	90-240V AC 50-60HZ	0.54	9.84	RTS 433 MHZ	1246116
GLYDEA® ULTRA 60 MOTOR RTS WITH 10' PLUG	WITHOUT HEAD	1	105	90-240V AC 50-60HZ	1.00	9.84	RTS 433 MHZ	1246118

Glydea® ULTRA Motors

Wired

Glydea® ULTRA is reliable, adaptable, robust, and discreet. A premium solution to motorize all types of curtains in any residential or commercial space.

Comfort & Convenience

- Reduce glare or enjoy privacy using the quietest motor solution available.
- Strong traversing capacity offers light, fluid movement for heavier curtains.

Energy Saving

- Reduce energy costs automatically by adding sensors or timers.
- Protect valuable furnishings from the sun's damaging UV rays.









Main functions











Touch Motion

Compatible end-products





NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
GLYDEA® ULTRA 35 WIRED MOTOR (NO PLUG)	WITHOUT HEAD	0.6	105	90-240V AC 50-60HZ	0.54	13.70	4.92	WIRED	1003153
GLYDEA® ULTRA 60 WIRED MOTOR (NO PLUG)	WITHOUT HEAD	1.1	105	90-240V AC 50-60HZ	1.00	13.70	4.92	WIRED	1003160

DESIGNED FOR SILENCE

Glydea® ULTRA Motors

Dry Contact

Glydea® ULTRA is reliable, adaptable, robust, and discreet. A premium solution to motorize all types of curtains in any residential or commercial space.

Comfort & Convenience

- Reduce glare or enjoy privacy using the quietest motor solution available.
- Strong traversing capacity offers light, fluid movement for heavier curtains.

Energy Saving

- Reduce energy costs automatically by adding sensors or timers.
- Protect valuable furnishings from the sun's damaging UV rays.



Main functions



Large window coverings



Soft start-stop



Adjustable speed



Quick & easy settings





MY function



Manual override



Back release



Touch Motion

Compatible end-products



DRAPERIES

NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
GLYDEA® ULTRA 35 MOTOR DCT WITH 10' PLUG	WITHOUT HEAD	0.6	105	90-240V AC 50-60HZ	0.54	9.84	DCT	1246115
GLYDEA® ULTRA 60 MOTOR DCT WITH 10' PLUG	WITHOUT HEAD	1	105	90-240V AC 50-60HZ	1.00	9.84	DCT	1246117

Irismo™ Motors

Radio Technology Somfy® (RTS)

The Irismo™ Mini DC is a friendly, low-voltage, and discreet solution to easily motorize draperies.

Comfort & Convenience

- Perfect solution to reduce glare or create instant privacy.
- Open or close draperies with the simple press of a button.
- Superior, reliable performance.
- Smartphone/tablet app provides control from virtually anywhere.
- Use natural voice commands to control RTS motorized solutions by adding TaHoma.

Energy Savings

- Reduce energy consumption up to 40%.
- Protect valuable furnishings from harmful UV rays.
- Add optional timers or sensors to provide automatic control.

Flexible Control Options

- Built-in RTS module (compatibile with all RTS control options).
- Easy integration with third-party automation systems.

Aesthetically Pleasing

 Clean white finish can easily be concealed above, to the left, or to the right of the track.

Quiet Yet Efficient

- Motor design and advanced high performance belt drive system provides quiet operation
- Touch motion and manual override allows manual control as desired.

Main functions





Soft start-stop



Adjustable speed



Quick & easy settings







Manual override



Back release



Touch Motion

Compatible end-products



NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
IRISMO™ 35 (MINI DC) RTS* (INCLUDES 24V DC POWER SUPPLY)	WITHOUT HEAD	0.6	87.5	90-240V AC 50-60HZ	2.00	13.12	RTS 433 MHZ	1003004
IRISMO™ 45 WIREFREE RTS* (WITH RECHARGEABLE BAT- TERY)	WITHOUT HEAD	0.8	87.5	24V DC	1.50		RTS 433 MHZ	1002353





Irismo™ Motors

Dry Contact

motorize draperies.

The Irismo™ Mini DC is a friendly, low-voltage, and discreet solution to easily



- Perfect solution to reduce glare or create instant privacy.
- Open or close draperies with the simple press of a button.
- Superior, reliable performance.
- Smartphone/tablet app provides control from virtually anywhere.

Energy Savings

- Reduce energy consumption up to 40%.
- Protect valuable furnishings from harmful UV rays.
- Add optional timers or sensors to provide automatic control.

Flexible Control Options

• Easy integration with third-party automation systems.

Aesthetically Pleasing

• Clean white finish can easily be concealed above, to the left, or to the right of the track.

Quiet Yet Efficient

- Motor design and advanced high performance belt drive system provides quiet operation.
- Touch motion and manual override allows manual control as desired.

Main functions



Medium sized blinds



Soft start-stop



Adjustable speed



Quick & easy settings

Touch Motion











Back release



Compatible end-products



NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
IRISMO™ 35 (MINI DC) DCT* (INCLUDES 24V DC POWER SUPPLY)	WITHOUT HEAD	0.6	87.5	90-240V AC 50-60HZ	13.12	DCT	1003003



Drapery Accessories



Glydea® ULTRA & Irismo™ Accessories

Zigbee®

Power over Ethernet (PoE) Gateway

NAME	ITEM NUMBER	
Zigbee (2-Way) Module for Glydea® ULTRA Motors	9000043	

Drapery Adaptor for Power over Ethernet (PoE) Gateway

9025012

Somfy Digital Network[™] (SDN) Drapery Modules

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
RS485 (SDN) Module for Irismo™ Motors (Irismo DCT TO RS485)	1811129	RS485 (SDN, 2-Way) Module for Glydea® ULTRA Motors	1871412	No.

Z-Wave®

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
Z-Wave Module for Drapery Motors (Irismo™ DCT to Z-Wave Upgrade)	1870228	Z-Wave Irismo™ 24V Mini DC Control Enclosure Kit	1870280	

Data Cables

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
Modular Cable, 25 ft., Grey	9013149	8 ft. Cable with RJ12 Plug	9015443	
Modular Cable, 7 ft.	9013346			

Power Supplies

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
Replacement 25.9V Rechargeable Li-ion Battery for Irismo™ 45 WireFree RTS (1002353)	9026476	Battery Charger for Irismo™ 45 WireFree RTS (1002353)	1003080	OFF

Power Supplies - Chargers



Glydea® ULTRA & Irismo™ Accessories

White Components

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Pinch Pleat Return Hook	1780895		Drive Pulley	1780945	
White Pulley Cover	1780898	0	RippleFold Pendant Only	1780948	6
Drapery Track 96' per Carton (6pcs x 16') (Minimum order of 16')(Sold per Foot)	1780899		High Performance Rotating Eye Runner	1781415	9
Carrier RippleFold 120% (Quantity per Roll: 500)(Sold Individually)	1780901	888	8.75" - 10.25" Projection Double Wall Mount Bracket Kit	1782053	100
Carrier RippleFold 100% (Quantity per Roll: 500)(Sold Individually)	1780902	8 8 8	4.5" - 6" Projection Adjustable Wall /Ceiling Bracket Kit	1782054	St.
Carrier RippleFold 80% (Quantity per Roll: 500)(Sold Individually)	1780903	8 8 8	Small Pulley	1782318	
RippleFold Return Snap	1780905		Silent High Performance Rotating Eye Runner	1782921	0
One Touch Ceiling Bracket	1780907	-	RippleFold Silent Runners 80% (White) (Quantity per Roll: 250)(Sold Individually)	9027592	
4.5"- 6" Projection Adjustable Wall Mount Bracket	1780909	-	RippleFold Silent Runners 100% (White) (Quantity per Roll: 250)(Sold Individually)	9027593	18° 8°
3.75″-10.25″ Projection Double Adjustable Wall Mount Bracket	1780910	I	RippleFold Silent Runners 120% (White) (Quantity per Roll: 250)(Sold Individually)	9027594	B. B.

Bronze Components

NAME	ITEM NUMBER	NAME	ITEM NUMBER
Small Pulley	1782861	Return Snap for RippleFold	1782863
Motor Hook for Pinch Pleat	1782862	Swivel Ceiling Bracket	1782864

Glydea® ULTRA & Irismo™ Accessories

Bronze Components

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
One Touch Ceiling Bracket	1782865		Carrier RippleFold 100% (Quantity per Roll: 500)(Sold Individually)	1782871	8 8
Adjustable Wall Mount Bracket	1782866		Carrier RippleFold 80% (Quantity per Roll: 500) (Sold Individually)	1782872	8 8
Double Adjustable Wall Mount Bracket	1782867		Drive Pulley	1782873	O A
Pulley Cover	1782868	0	Drapery Track 228' per Carton (12pcs x 19') (Minimum order of 19')(Sold per Foot)	9025133	
High Performance Rotating Eye Runner	1782869		4.5" - 6" Projection Adjustable Wall/Ceiling Bracket Kit (Bronze)	9025621	
Carrier RippleFold 120% (Quantity per Roll: 500)(Sold Individually)	1782870	8 8	8.75" - 10.25" Projection Double Wall Mount Bracket Kit (Bronze)	9025622	

Common Drapery Components

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Swivel Ceiling Bracket (Recommended for Curved and Bent Tracks)	1780906	6	Glystro Conversion Kit	1782106	200 - S
Top Mount Motor Kit	1780908	(33)	Ripple Snap Tape 100-Yard Roll	1782301	
One Way Overlap Universal Arm (For Use with Large Pulley)	1780947	-	Straight Rail Joint for Spliced Tracks	1782316	
RippleFold Butt Master Arms (2 required)	1780953	Name and A	One Way Butt Arm Kit	1782319	
Heavy Duty Master Carrier	1781344		Overlap Arm Kit (For Center and One Way Openings)	1782320	
High Performance Belt for Drapery Tracks (Sold per Foot)	1782084	0	Straight Arm Kit (for Center Opening)	1782321	



Glydea® ULTRA & Irismo™ Accessories

Common Drapery Components

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Ripple Snap Tape (100 yd roll) (Sold per Yard)	1782542		Empty Irismo™ 24V Mini DC Control Enclosure Kit	9021132	
Stabilizer Wheel for Carrier Arms	1782661	a	Adjustable RippleFold Arm Kit	9027045	
Straight Arm Kit (for Butted Tracks)	1782662		90 Degree Drapery Motor Adaptor Plate	9027179	To see
Silent Heavy Duty Master Carrier	1782922	0 0	Fixing Holder for RippleFold Runner	9027657	

Tools

NAME	ITEM NUMBER	
Limit Setting Tool (for use with Sonesse® 30 Dry Contact/RS485, Glydea® ULTRA & Irismo™ DCT)	9014599	D.E

Curving/Bending & Packaging Fees

NAME	ITEM NUMBER	NAME	ITEM NUMBER
Service Charge for Custom Curving/Bending	9014999	Special Packing Charge	9019872



NOTES







Outdoor Living

Today more than ever, people are looking beyond their walls and seeking ways to extend the comforts of their living environment to the great outdoors. For homeowners and commercial operations alike, Somfy® provides a variety of motorization solutions to maximize the comfort and convenience of outdoor life. These solutions are easy to install, easy to operate, and easy to enjoy.

Convenient Control	186
Awning Motors	189
Awning Accessories	201
Exterior Screen Motors	215
Exterior Screen Accessories	227
Pergola Motors	239
Pergola Accessories	241
Rolling Shutter Motors	243
Rolling Shutter Accessories	255

Convenient Control

Somfy makes it simple to take pleasure in the outdoors with a choice of control systems for effortless, intuitive operation.

- Radio Technology Somfy® (RTS) systems place total control of awnings, screens, rolling shutters, and pergolas at the user's fingertips with hand-held remotes, wireless switches, automatic timers, and other control options.
- Somfy's TaHoma® provides easy control anytime with a simple smart-device app, automatic timed scenes, or even natural voice commands.
- Somfy sensor accessories allow the ultimate in convenience with automatic control depending on time, wind, sun, or weather conditions.

Awnings

Motorized awnings powered by Somfy instantly transform any deck, patio, or porch into a cool, shaded outdoor living space with one-touch simplicity. They give users more opportunity to enjoy their outdoor living space and more control of their natural outdoor lighting, while protecting their valuable furnishings from harmful UV rays.

Somfy sensors enable awning systems to detect and react to changing outdoor conditions. When the sun beats down, the awning extends; when the wind begins to blow, it automatically retracts.

Exterior Screens

Motorized exterior screens are a simple solution that enhances the cool comfort, insect protection, energy efficiency, and privacy of virtually any living environment. Our motorized systems are designed for all types of outdoor screens.

When integrated with an RTS sun sensor, Somfy exterior screen systems will lower automatically to maintain an optimal temperature inside. And when night falls and lights turn on, a timer enables screens to lower and protect the home from unwanted insects.

Pergolas

Utilizing built-in sensors, Somfy's motorized pergola systems automatically adapt the position of the slats according to the weather conditions. In rain, snow, strong winds, ice, or other challenging conditions, the pergola remains protected year-round.

Customized pergola systems allow easy outdoor comfort and enjoyment in all four seasons, especially when connected with heating and lighting products.

Rolling Shutters

Motorized rolling shutters protect any home from the elements, including hurricanes and storm damage, with the touch of a button or a simple voice command. Users can also control them when away from home with our TaHoma smart system.

Somfy rolling shutter motors offer enhanced security and resistance to break-ins thanks to their tough anti-lift links. They also provide excellent insulation for energy savings, and for shutting out noise and light from the outside. And Somfy offers the quietest rolling shutter motors in the industry for a peaceful home environment.









NOTES

Awning Motors



Extend Outdoor Living Space Quick, cool comfort for patios and decks, and UV protection for valuable outdoor furniture.



Power Options A wide range of torque choices available. Sunea motors are UL listed for safe, easy-to-use connection.



Features for Flexibility Motors equipped with compact manual override in event of a power failure.



Smart Home Limit settings and product position preferences managed with fingertip controls or TaHoma switch.



Energy Savings In addition to controlling natural light, environmentally friendly motors conserve power in standby mode.



Technologies Adapts to quickly changing weather with sensors that react to sun, wind and rain.



LS40 AC Motor

Standard Motors - Progressive Limit Adjustment



The LS40 AC is a wired, 40mm motor for blinds and screens.

Easy Integration

- Thin and round head.
- Suitable for compact tubes diameter 37mm or more (internal diameter).

Easy Limit Setting


• Down and up end limits set by the progressive adjusting knob on the motor head.

Simple, Effortless, and Comfortable

• Accessible motorization to move blinds, shades, or screens effortlessly.

Main functions





NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
412R2 RH WITHOUT FAST CONNECTOR	ROUND	12	10	120V AC 60HZ	1.05	19.09	6.56	WIRED	1024192





LT50 Sunea® CMO AC Motors

Radio Technology Somfy® (RTS)

Sunea[™] is the most advanced, innovative motor for cassette, semi-cassette, and standard awnings. A Sunea motorized awning can be controlled with any Radio Technology Somfy accessory including hand-held remote controls, wireless wall switches, and timers.

Easy Install

- Can be plugged into a standard wall outlet or hard-wired.
- Automatically resets its limits as the fabric settles or stretches.
- Maintain control of the awning even with loss of power using a manual crank handle
- Settings and controls are maintained in the motor's memory.

Radio Technology Somfy

- Compatible with all RTS-powered systems, controls, and accessories so users can mix and match options to maximize product performance.
- Exclusive Somfy "my" feature saves a favorite/preferred product position.
- RTS is omni-directional, so no need to aim the remote at the product being controlled.

Universal Quick Connector

- · Molded in white to match connector and cable colors.
- For interior and exterior IP55 (diameter 40 & 50) motors, radio and wired.
- UL recognized for a safe, easy-to-use connection.
- Plug & play extensions (no electrician needed).
- Limited motor SKUs to effectively manage inventory.
- Flexibility to manage extension lengths as needed.

Main functions



 $Manual\,override$



Back release



Back impulse



Quick & easy



MY function

Electronic end limits



Semi-automatic limit setting



Remote limit setting



NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
SUNEA® RTS CMO 525A2 WITH 18" FAST CONNECTOR	СМО	25	20	120V AC 60HZ	1.60	28.35	1.31	RTS 433 MHZ	1114304
SUNEA® RTS CMO 535A2 WITH 18" FAST CONNECTOR	СМО	35	20	120V AC 60HZ	2.10	28.35	1.31	RTS 433 MHZ	1116321
SUNEA® RTS CMO 535A2 WITH 18" FAST CONNECTOR, BLACK CABLE	СМО	50	14	120V AC 60HZ	2.10	28.35	1.31	RTS 433 MHZ	1116318
SUNEA® RTS CMO 550R2 WITH 18" FAST CONNECTOR	СМО	50	14	120V AC 60HZ	2.10	28.35	1.31	RTS 433 MHZ	1118210









LT50 Orea® AC Motors

Radio Technology Somfy® (RTS)

Orea® is suitable for pre- and post-construction opportunities and can be controlled with any Radio Technology Somfy accessory including hand-held remote controls, sensors, wireless wall switches, and timers.

Easy Install

- Plug and play tubular motor with no need for costly wiring.
- · Star motor head reduces the light gap.
- Automatic up limit detection with adjustable closing force to ensure a cassette always closes perfectly.
- Easily set and adjust limits with the transmitter.

Radio Technology Somfy

- Compatible with all RTS-powered systems, controls, and accessories so users can mix and match options to maximize product performance.
- Exclusive Somfy "my" feature saves a favorite/preferred product position.
- RTS is omni-directional, so no need to aim the remote at the product being controlled.

Main functions



Semi-automatic limit setting



MY function



Back release



Remote limit setting



Quick & easy settings



 \bigcap Electronic end limits $\stackrel{\cdot \square}{2}$



Compatible with rain, sun, & wind sensors





NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
OREA RTS 535A2	STAR	35	20	120V AC 60HZ	1.10	26.89	9.84	RTS 433 MHZ	1038173
OREA RTS 550R2	STAR	50	14	120V AC 60HZ	1.10	26.89	9.84	RTS 433 MHZ	1038174











LT50 CMO AC Motors

Wired

The LT50 CMO is a 120V/60Hz standard tubular motor featuring compact manual override to operate manually when power is not available.

Easy to Install & Use

- Features a compact manual override (CMO) allowing operation in the event of a power failure.
- A standard 4-wire motor is an ideal choice for preconstruction opportunities while the walls are open and operation with a wired switch is preferred.
- Detachable power cable to easily manage wire length or replace if needed.
- Standard control options include wired wall switches.
- Easily set and adjust limits using rapid push-buttons.

Environmentally Friendly

- Designed to save energy.
- Doesn't consume power in standby mode.

Main functions



Quick & easy settings




Rapid limit adjustments



Manual override





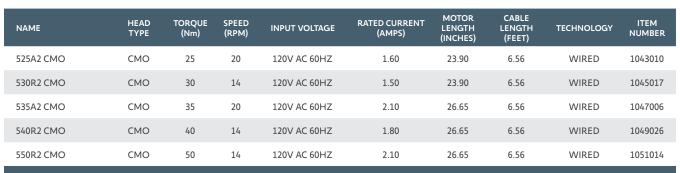





LT50 RTS CMO AC Motors

Radio Technology Somfy® (RTS)

LT50 RTS CMO tubular motors have RTS built-in and feature a compact manual override (CMO).

Easy to Install & Use

- Premier choice for hurricane shutters and retractable awnings.
- 120V tubular motor with built-in RTS.
- Features a compact manual override (CMO) which allows users to operate the motorized application manually when power is not available.
- This motor can be plugged into a standard wall outlet or hard-wired.
- Detachable power cable to easily manage wire length or replace if needed.
- Easily integrates with most home automation systems.
- Compatible with full range of RTS controls and accessories.
- Easily set and adjust limits using rapid push-buttons.

Main functions



Quick & easy settings



Rapid limit adjustments



Manual override




Compatible with rain, sun, & wind sensors



MY function





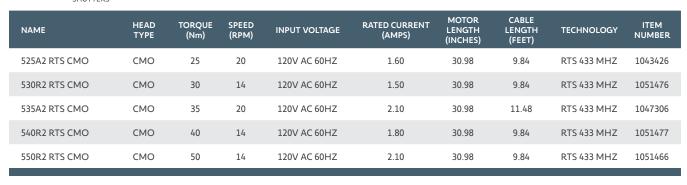





LT50 AC Motors

Somfy Digital Network™ (SDN) RS485

LT50 AC motors offer intelligent two-way communication.

Multiple Applications

• Internal, External, Residential, and Commercial, and Integrated network solutions.

Simple Installation & Setup

- Compatible with leading industry hardware.
- Can be mounted in the bracket six different ways.
- Features a "snap-on" style connection for roller tube adapters.
- Customizable power cord lengths based on installation requirements.
- Limits may be set using progressive screw adjustment buttons, a radio transmitter, or addressable network limit settings.

Easy Integration


- Suitable for tubes diameter 47mm or more (internal diameter).
- · Removable cable.

Wide Compatibility

- Compatible with the Somfy Digital Network (SDN).
- Easily integrates with third-party control systems.

Main functions

Large window



NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
535A2 RS485	STAR	35	20	120V AC 60HZ	2.10	26.89	9.84	RS485	1002288







LT50 AC Motors

Standard Motors - Rapid Limit Adjustment

The LT50 AC is a standard 4-wire star head motor, an ideal choice for preconstruction opportunities while the walls are open. Control an individual shade or group of shades with a wired switch.

Installation Advantages

- Adjustable motorhead orientation installs in 6 different positions.
- Power cable is detachable at the motor head for quick replacement when necessary or to manage wire length.
- Drive wheels snap on for quick assembly.
- Rapid push-button limits allow for quick and easy setting and adjustment.
- Optional fast connectors are available in various lengths to avoid the need for an electrician.

Energy Savings

- Act for Green motor, designed to be environmentally friendly.
- Doesn't consume power in standby mode for reduced user costs.

Main functions







Rapid limit adjustments







NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
515A2 15/20 SJTW	STAR	15	20	120V AC 60HZ	1.10	20.98	9.84	WIRED	1040063
520R2 20/14 SJTW	STAR	20	14	120V AC 60HZ	1.10	20.98	9.84	WIRED	1042055
525A2 25/20 SJTW	STAR	25	20	120V AC 60HZ	1.60	22.17	9.84	WIRED	1043424
530R2 30/14 SJTW	STAR	30	14	120V AC 60HZ	1.50	22.17	9.84	WIRED	1045793
535A2 35/20 SJTW	STAR	35	20	120V AC 60HZ	2.10	24.13	9.84	WIRED	1047368
540R2 40/14 SJTW	STAR	40	14	120V AC 60HZ	1.80	24.13	9.84	WIRED	1049894
550R2 50/14 SJTW	STAR	50	14	120V AC 60HZ	2.10	24.13	9.84	WIRED	1051464













LT60 AC Motors

Wired

A standard 4-wire star head motor, an ideal choice for pre-construction opportunities while the walls are open. Control an individual shade or group of shades with a wired switch.

Installation Advantages

- Adjustable motorhead orientation installs in six different positions.
- Power cable is detachable at the motor head for quick replacement when necessary or to manage wire length.
- Drive wheels snap on for quick assembly.
- Rapid push-button limits allow for quick and easy setting and adjustment.

Energy Savings

- Act for Green motor, designed to be environmentally friendly.
- Doesn't consume power in standby mode for reduced user costs.

Main functions



Quick & easy settings



Rapid limit adjustments







NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
660R2 60/14 SJTW	STAR	60	14	120V AC 60HZ	2.50	26.18	9.84	WIRED	1162272
680R2 80/14 SJTW	STAR	80	14	120V AC 60HZ	3.40	26.18	9.84	WIRED	1164262
6100R2 100/14 SJTW	STAR	100	14	120V AC 60HZ	3.80	26.18	9.84	WIRED	1166290











LT60 Altus® AC Motors

Radio Technology Somfy® (RTS)

The LT60 Altus is a universal solution for larger rolling shutters and awnings.

Easy Install

- Can be plugged into a standard wall outlet or in-wall wired.
- Limits quickly set and adjusted from the transmitter.
- Starhead motor reduces the light gap.

Radio Technology Somfy

- Compatible with all RTS-powered systems, controls, and accessories so users can mix and match options to maximize product performance.
- Exclusive Somfy "my" feature saves a favorite/preferred product position.
- RTS is omni-directional, so no need to aim the remote at the product being controlled.

Main functions



Quick & easy settings



Remote limit setting



Compatible with rain, sun, & wind sensors



MY function



Electronic end limits







NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
ALTUS® RTS 660R2	STAR	60	14	120V AC 60HZ	2.50	27.56	9.84	RTS 433 MHZ	1162271
ALTUS® RTS 680R2	STAR	80	14	120V AC 60HZ	3.40	29.13	9.84	RTS 433 MHZ	1164261
ALTUS® RTS 6100R2	STAR	100	14	120V AC 60HZ	3.80	29.13	9.84	RTS 433 MHZ	1166289





LT60 CMO AC Motors

Wired

LT60 CMO standard tubular motors are ideal for larger applications. They feature a compact manual override for when power is not available.

Ease of Installation

- Standard 4-wire motor is an ideal choice for preconstruction opportunities while the walls are open and operation with a wired switch is preferred.
- Standard control options include wired wall switches.
- Easily set and adjust limits using rapid push-buttons.
- Detachable power cable to easily manage wire length, or replace if needed.

Environmentally Friendly

- Designed to save energy.
- Doesn't consume power in standby mode.

Main functions



Quick & easy settings



Rapid limit adjustments



Manual override







NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
660R2 CMO	СМО	60	14	120V AC 60HZ	2.50	25.79	6.56	WIRED	1162014
680R2 CMO	СМО	80	14	120V AC 60HZ	3.40	27.17	6.56	WIRED	1164013
6100R2 CMO	СМО	100	14	120V AC 60HZ	3.80	27.17	6.56	WIRED	1166016














Awning Accessories

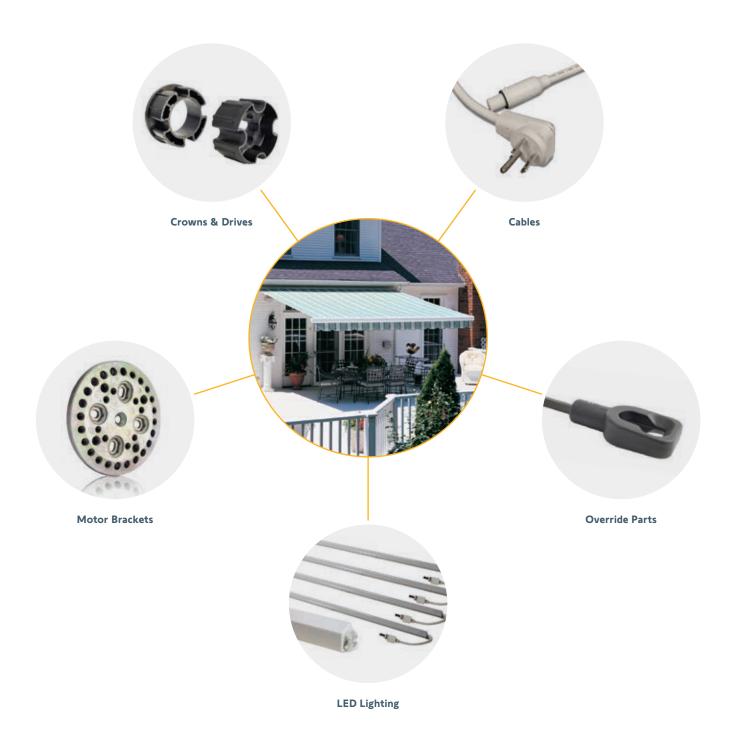



Power Cables

NAME	ITEM NUMBER	
4-Conductor Motor Cable SJTW (Sold per Foot)	9012110	

Power Cables - 4-Conductor Fast Connector & Extensions

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Fast Connector Extension Cable 4C SJTW - 4.4 ft.	9021117	0	Fast Connector Extension Cable 4C SJTW - 16.4 ft.	9021120	
Fast Connector Extension Cable 4C SJTW - 8.4 ft.	9021118		Fast Connector Extension Cable 4C SJTW - 22.4 ft.	9021121	

Crowns & Drives

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Crown and Drive Set (Somfy 40mm x 1.5mm Round Tube)	9012224	00	40mm Octagonal Crown for 40mm x 0.8mm Octagonal Tube	9147327	O
400 Series Crown and Drive Set (40mm x 0.8mm Octagonal Tube)	9012225	0	Crown (for 40mm x 1.5mm Round Tube)	9147330	0
400 Series to 500 Series Crown and Drive Adaptor Kit	9013763	Omp	Drive for (40mm x 1.5mm Round Tube)	9147544	
Soft Drive Wheel 44mm (Acmeda Type)	9013790		Drive (for 40mm x 0.8mm Octagonal Tube)	9147545	
Crown Adaptor 44mm Tube (Acmeda Type)	9013791	0	Anti-Blocking System (ABS) 400 Series Left Rotation	9704138	
Drive Adaptor (for 40mm x 1mm Round Tube)	9132142		Anti-Blocking System (ABS) 400 Series Right Rotation	9704139	
Crown Adaptor (for 40mm x 1mm Round Tube)	9132143	0			



Tubes

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
40mm Round Aluminum Tube (ID 36mm) (20 ft. Max Length)	1781153	40mm Octagonal Tube (Minimum Order Length 20')	1781154	

Adaptor Plates

NAME	ITEM NUMBER	
R8 Adaptor Plate	9012258	* + 6

Idler End Caps

NAME	ITEM NUMBER	
End Cap for 40mm Octagonal Tube	9012274	0

Motor Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
10mm Square Motor Bracket for 400S Motors	9147334	(a)	400 Series to 500 Series Motor Mounting Conversion Bracket	9500659	
LO Motor Bracket for 400S Motors	9147337				

Tools

NAME	ITEM NUMBER	
Standard Motor Tester Cable, 4-Wire	9012116	

500 Series Accessories

Power Cables

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
4-Conductor Motor Cable SJTW (Sold per Foot)	9012110	8	3-Conductor Motor Cable SJTW (Sold per Foot)	9012111	E 7



Power Cables - 3-Conductor LT

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable - 10 ft.	9018190	Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable with NEMA Plug - 18 ft.	9021052	
Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable - 24 ft.	9020985	Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable with NEMA Plug - 24 ft.	9021053	
Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable with NEMA Plug - 1.5 ft.	9021049	Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable - 10 ft. (Black)	9028737	29
Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable with NEMA Plug - 6 ft.	9021050	Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable - 24 ft. (Black)	9028738	\$
Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable with NEMA Plug - 10 ft.	9021051			

Power Cables - 3-Conductor CMO

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
LT50 CMO RTS Cable with 5-15P Right Angle NEMA Plug - 12 ft.	9012148	LT50 CMO RTS SJTW 3C Cable - 10 ft.	9021025	1
LT50 CMO RTS Cable with 5-15P Right Angle NEMA Plug - 24 ft.	9012149	LT50 CMO RTS SJTW 3C Cable - 24 ft.	9021047	0
LT50 CMO RTS Cable with 5-15P Right Angle NEMA Plug - 18 ft.	9012150			

Power Cables - 4-Conductor LT

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
Sonesse® 50 & LT50/LT60 SJTW 4C Cable - 10 ft.	9018345	Sonesse® 50 & LT50/LT60 SJTW 4C Cable - 24 ft.	9021046	



Power Cables - 4-Conductor CMO

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
CMO Motor Cable - 12 ft.	9012137	G.	CMO Motor Cable - 24 ft.	9208308	a.
CMO Motor Cable - 6 ft.	9208302	-			

Power Cables - 3-Conductor Fast Connector & Extensions

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Fast Connector Extension Cable 3C SJTW with NEMA Plug - 10.4 ft.	9020791		Fast Connector Extension Cable 3C SJTW with NEMA Plug - 4.4 ft.	9021114	79
Fast Connector Extension Cable 3C SJTW with NEMA Plug - 18 ft.	9020792		Fast Connector Extension Cable 3C SJTW with NEMA Plug - 8.4 ft.	9021115	
Fast Connector Extension Cable 3C SJTW with NEMA Plug - 24 ft.	9020793		Fast Connector Extension Cable 3C SJTW without NEMA Plug - 8.4 ft.	9021157	
Fast Connector Extension Cable 3C SJTW with NEMA Plug - 24 ft., Black	9020794	60	Panel Mount, 3C Female Fast Connector	9026398	W.
Sonesse® 50 & LT50 RTS/RS485 Motor Pigtail to Fast Connector SJTW 3C Cable - 1.6 ft.	9020803	1	Fast Connector Extension Cable 3C SJTW with NEMA Plug - 18 ft., Black	9028673	42
Fast Connector Extension Cable 3C SJTW with NEMA Plug - 1.4 ft.	9021113	C			

Power Cables - 4-Conductor Fast Connector & Extensions

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Sonesse® 50 & LT50 Motor Pigtail to Fast Connector SJTW 4C Cable - 1.6 ft.	9020804	1	Fast Connector Extension Cable 4C SJTW - 8.4 ft.	9021118	
Fast Connector Extension Cable 4C SJTW - 4.4 ft.	9021117	0	Fast Connector Extension Cable 4C SJTW - 16.4 ft.	9021120	



Power Cables - 4-Conductor Fast Connector & Extensions

NAME	ITEM NUMBER	
Fast Connector Extension Cable 4C SJTW - 22.4 ft.	9021121	

Data Cables

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
4-Conductor 26 AWG Modular Cable RJ9 to RJ45 - 2.5 ft. (Data Only, Black)	9018541	0	4-Conductor 26 AWG Modular Cable RJ9 to RJ45 - 2.5 ft. (Power & Data, Grey)	9018545	0
4-Conductor 26 AWG Modular Cable RJ9 to RJ45 - 8 ft. (Data Only, Black)	9018542	0	4-Conductor 26 AWG Modular Cable RJ9 to RJ45 - 8 ft. (Power & Data, Grey)	9018546	
4-Conductor 26 AWG Modular Cable RJ9 to RJ45 - 12 ft. (Data Only, Black)	9018543	0	4-Conductor 26 AWG Modular Cable RJ9 to RJ45 - 12 ft. (Power & Data, Grey)	9018547	
4-Conductor 26 AWG Modular Cable RJ9 to RJ45 - 24 ft. (Data Only, Black)	9018544	0	4-Conductor 26 AWG Modular Cable RJ9 to RJ45 - 24 ft. (Power & Data, Grey)	9018548	

Crowns & Drives

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
2.5" (60mm) Round LT50 Set "Hard Clip"	9012231	00	DS 78 LT50 Set	9012239	Og
2.75" (67mm) Round LT50 Set "Hard Clip"	9012232	00	Modified LT60 DS 78 Drive (Key Way Widened)	9012241	
P72 LT50 Set	9012235	000	LT50 Drive 70mm Rollerbat	9016059	()
DS70 LT50 Set (0.8mm - 1mm Kit)	9012237	00	70mm LT50 Crown	9016298	0
DS 74 LT50 Set	9012238	00	LT50 Crown 80mm Rollerbat	9019555	



AWNING > ACCESSORIES OUTDOOR LIVING

500 Series Accessories Crowns & Drives

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
LT50 Drive 80mm Rollerbat	9019556	Q	DS 85mm Round Crown	9707035	
LT50 Crown 70mm Rollerbat	9026982	\bigcirc	DS 70mm Round Drive (0.8mm - 1mm)	9751005	1
2.5" Round LT50 Drive "Hard Clip"	9206019		AMA/P71 LT50 Drive	9751015	
2.5" (60mm) Round Drive "Soft Clip"	9206041		DS 78mm Round Drive	9761001	
3.5" Round LT50/60 Drive (89mm x 2mm)	9420303		DS 85mm Round Drive	9761003	
4.0" Round LT50 Drive	9420304		DS 78mm/D Round Drive	9761004	B
2.5" (60mm) Round Crown	9707026	0	DS 78mm/R Round Drive	9761005	0
DS 78mm Round Crown	9707027	O	P72 LT50 Drive	9761011	0
SM65 (63mm) Round Crown - 3 grooves	9707030	Q	Drive Stop and Screw	9910004	10
2.75" (67mm) Round Crown	9707031	0	AMA/P71 LT50 Crown	9997118	0
DS 70 LT50 Crown	9707034	0			

Override Parts

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
Connector Sleeve 7mm Hex to 8mm Square	9012323	CMO Awning Override Kit (U.S. Threads)	9012348	00 Pr



Override Parts

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
CMO ME Awning Override Kit (U.S. Threads)	9012349	" "	Connector Sleeve 7mm Hex to 7mm Hex	9685120	_
CMO Awning Kit without Awning Eye	9012362	1100	CMO Awning Override Shaft (170mm Long)	9685136	-
Sunea® RTS CMO Override Kit	9015989		CMO Awning Override Shaft (100mm Long)	9685148	-42
Short Awning Override Shaft Ring	9016332	-43	CMO Awning Override Shaft (100mm Long) with Geiger Eye	9707287	
Extension Shaft 7mm Hex L=220mm with Screw	9420657	\	CMO Motor Limit Setting Tool	9910019	1
Extension Shaft 7mm Hex L=330mm with Screw	9420659	\			

Idler End Caps

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
13mm Square Drive Shaft - 12mm OD for End Cap	1781009	-	Heavy Duty End Cap Shaft	9420674	000
Idler End Cap without Shaft 2.0° OD with M5 Screw	9129631	(0)	2.0" Plastic Idler End Cap - 10mm Shaft	9700958	C.
Idler End Cap without Shaft 2.5" OD with M5 Screw	9129632				

Motor Brackets

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
Sunea® RTS CMO Universal Bracket-Metric	9015801	Sunea® RTS CMO Universal Bracket	9015802	





Motor Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Pull Off Tool for Spring Ring	9206015	\sim	DMI Bracket 100mm x 100mm	9706034	11
Weld-on Bracket without Spring Ring	9206029	O	LT Compact ST Motor Bracket PA66 with Spring Ring	9708461	O
Spring Ring	9206033		Universal Motor Bracket (Metric) with Spring Ring and Threaded for M8 and M6 Bolts	9910001	0
LT50 HA Flush Mount Motor Bracket	9410715	0	Spring Ring with Locking Screw	9910002	
Universal Motor Bracket with Spring Ring	9420631		Universal Motor Bracket - US Threads	9910021	
CMO Awning Motor Bracket - U.S. Threads	9420648		CMO ME Bracket	9910041	. 0.
Spring Ring with Loop	9685025	8	CMO/Standard LT Conversion Motor Bracket - US Threads	9910051	(8)

Idler Brackets

NAME	ITEM NUMBER	1
Idler Bracket 14mm ID	9002540)

Miscellaneous Brackets

NAME	ITEM NUMBER	
Light Duty Angle LT50 Type	9410637	

Tools

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
Standard Motor Tester Cable, 4-Wire	9012116	RS485 Motor Limit Setting & Address Reader Tool	9017142	



Screws

NAME	ITEM NUMBER	
Screw for Standard LT50 Motor	9670013	Will F

600 Series Accessories

Power Cables

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
4-Conductor Motor Cable SJTW (Sold per Foot)	9012110	=	3-Conductor Motor Cable SJTW (Sold per Foot)	9012111	

Power Cables - 3-Conductor LT

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable - 10 ft.	9018190	Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable with NEMA Plug - 18 ft.	9021052	
Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable - 24 ft.	9020985	Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable with NEMA Plug - 24 ft.	9021053	
Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable with NEMA Plug - 1.5 ft.	9021049	Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable - 10 ft. (Black)	9028737	? 9
Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable with NEMA Plug - 6 ft.	9021050	Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable - 24 ft. (Black)	9028738	\$
Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable with NEMA Plug - 10 ft.	9021051			

Power Cables - 4-Conductor LT

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
Sonesse® 50 & LT50/LT60 SJTW 4C Cable - 10 ft.	9018345	Sonesse® 50 & LT50/LT60 SJTW 4C Cable - 24 ft.	9021046	





9208308

600 Series Accessories

Power Cables - 4-Conductor CMO

NAME	ITEM NUMBER		NAME
CMO Motor Cable - 12 ft.	9012137	a ·	CMO Motor Cable - 24 ft.
CMO Motor Cable - 6 ft.	9208302	3	

Crowns & Drives

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Drive Stop for LT60	9012194	0.	3.5" Round LT50/60 Drive (89mm x 2mm)	9420303	
4.0" Round LT60 Set	9012221	00	4.0" Round LT50 Drive	9420304	
2.75" Round LT60 Set "Hard Clip"	9012246	00	LT60 Drive Wheel 101.6mm X 3.6mm	9420309	
P72 LT50 Set (4mm Offset)	9012329	00	2.75" (67mm) Round Crown	9420342	0
LT60 Crown 80mm Rollerbat	9019557		4.0" Round Crown	9420370	0
LT60 Drive 80mm Rollerbat	9019558	0	3.5" Round Crown (89mm x 2mm)	9520312	0
LT60 Stop Wheel Screw	9205870		DS 78 LT60 Crown	9705341	0
2.5" Round LT50 Drive "Hard Clip"	9206019		DS 78mm Round Crown	9707639	Q
2.5" (60mm) Round Drive "Soft Clip"	9206041		78mm Round Crown	9707640	0
P72 LT60 Crown	9277167	Q	DS 78mm Round Drive	9761001	



600 Series Accessories Crowns & Drives

NAME	ITEM NUMBER	NAME	ITEM NUMBER
DS 85mm Round Drive	9761003	DS 78mm/R Round Drive	9761005
DS 78mm/D Round Drive	9761004	P72 LT50 Drive	9761011

Override Parts

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Connector Sleeve 7mm Hex to 8mm Square	9012323		Extension Shaft 7mm Hex L=330mm with Screw	9420659	
CMO Awning Override Kit (U.S. Threads)	9012348	20 CO	Connector Sleeve 7mm Hex to 7mm Hex	9685120	
CMO ME Awning Override Kit (U.S. Threads)	9012349	" "	CMO Awning Override Shaft (170mm Long)	9685136	
CMO Awning Kit without Awning Eye	9012362	110	CMO Awning Override Shaft (100mm Long)	9685148	-42
Short Awning Override Shaft Ring	9016332		CMO Awning Override Shaft (100mm Long) with Geiger Eye	9707287	-
Extension Shaft 7mm Hex L=220mm with Screw	9420657	\	CMO Motor Limit Setting Tool	9910019	1

Idler End Caps

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
13mm Square Drive Shaft - 12mm OD for End Cap	1781009	-	Heavy Duty End Cap Shaft	9420674	00 10
Idler End Cap without Shaft 2.5" OD with M5 Screw	9129632	(6)			





Motor Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Pull Off Tool for Spring Ring	9206015	\sim	DMI Bracket 100mm x 100mm	9706034	11
Weld-on Bracket without Spring Ring	9206029	Q	Universal Motor Bracket (Metric) with Spring Ring and Threaded for M8 and M6 Bolts	9910001	0
Spring Ring	9206033		Spring Ring with Locking Screw	9910002	
Universal Motor Bracket with Spring Ring	9420631	O	Universal Motor Bracket - US Threads	9910021	
CMO Awning Motor Bracket - U.S. Threads	9420648		CMO ME Bracket	9910041	. 0
Motor Bracket LT60	9430601	0	CMO/Standard LT Conversion Motor Bracket - US Threads	9910051	(5)
Spring Ring with Loop	9685025	8			

Tools

NAME	ITEM NUMBER	
Standard Motor Tester Cable, 4-Wire	9012116	



NOTES

Exterior Screen Motors



Simple & Effective Enjoy the breeze and keep insects out for a more pleasant outdoor experience.



A Bit of Privacy A touch or voice command quickly adds extra privacy for backyard spaces.



Power Options Systems available for all types of outdoor screens.



Technologies Obstacle detection protects the

screen as well as furnishings and other items.



Smart Home Compatible with RTS and TaHoma switch for easy control.



LS40 AC Motor

Standard Motors - Progressive Limit Adjustment



The LS40 AC is a wired, 40mm motor for blinds and screens.

Easy Integration

- Thin and round head.
- Suitable for compact tubes diameter 37mm or more (internal diameter).

Easy Limit Setting


• Down and up end limits set by the progressive adjusting knob on the motor head.

Simple, Effortless, and Comfortable

• Accessible motorization to move blinds, shades, or screens effortlessly.

Main functions





NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
412R2 RH WITHOUT FAST CONNECTOR	ROUND	12	10	120V AC 60HZ	1.05	19.09	6.56	WIRED	1024192





LS40 Altus® AC Motors

Radio Technology Somfy® (RTS)

The LS40 Altus is a universal solution for exterior & interior applications.

Wide Range of Solutions

- Compact 40mm design adapts easily to smaller shading hardware, requiring less mounting space.
- Compatible with Somfy's full range of RTS controls and accessories.

Universal Quick Connector

- Molded in white to match connector and cable colors.
- For interior and exterior IP55 (diameter 40 & 50) motors, radio and wired.
- UL recognized for a safe, easy-to-use connection.
- Plug & play extensions (no electrician needed).
- Limited motor SKUs to effectively manage inventory.
- Flexibility to manage extension lengths as needed.

Main functions



Medium sized blinds



Quick & easy



Electronic end limits Remote limit setting MY function








Compatible with rain, sun, & wind sensors

Compatible end-products



				(AMPS)	(INCHES)	(FEET)	TECHNOLOGY	NUMBER
ALTUS® RTS 404S2 RH WITH FAST ROUN CONNECTOR	ID 4	36	120V AC 60HZ	0.90	20.47	1.64	RTS 433 MHZ	1240260
ALTUS® RTS 409R2 RH WITH FAST ROUN CONNECTOR	ID 9	18	120V AC 60HZ	1.05	19.09	1.64	RTS 433 MHZ	1240261



100









LT50 Orea® AC Motors

Radio Technology Somfy® (RTS)

Orea® is suitable for pre- and post-construction opportunities and can be controlled with any Radio Technology Somfy accessory including hand-held remote controls, sensors, wireless wall switches, and timers.

Easy Install

- Plug and play tubular motor with no need for costly wiring.
- · Star motor head reduces the light gap.
- Automatic up limit detection with adjustable closing force to ensure a cassette always closes perfectly.
- Easily set and adjust limits with the transmitter.

Radio Technology Somfy

- Compatible with all RTS-powered systems, controls, and accessories so users can mix and match options to maximize product performance.
- Exclusive Somfy "my" feature saves a favorite/preferred product position.
- RTS is omni-directional, so no need to aim the remote at the product being controlled.

Main functions



Semi-automatic limit setting



MY function



Back release



Back impulse



Remote limit setting



Quick & easy settings



Electronic end limits



Compatible with rain, sun, & wind sensors





NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
OREA RTS 535A2	STAR	35	20	120V AC 60HZ	1.10	26.89	9.84	RTS 433 MHZ	1038173
OREA RTS 550R2	STAR	50	14	120V AC 60HZ	1.10	26.89	9.84	RTS 433 MHZ	1038174













LT50 Maestria™ AC Motors

Radio Technology Somfy® (RTS)

The Maestria™ 50 RTS is designed to motorize all types of exterior vertical screens while offering the specific functionalities needed for zip applications.

- Smart functions such as obstacle detection and automatic adjustment protect screen and patio furniture.
- Automatically adjusts to stretch the fabric.

Easy to Install

• Plug & play and precise setting features make installation quick, easy, and streamlined.

Reliable

• Obstacle detection protects the fabric, as well as the outdoor furniture.

• Maestria is compatible with all types of screens and RTS control options.

Main functions










Quick & easy settings



Automatic limit setting













Compatible with rain,



Electronic end limits



SCREENS

NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
MAESTRIA™ RTS 510A2	STAR	10	20	120V AC 60HZ	1.10	24.13	9.84	RTS 433 MHZ	1134082
MAESTRIA™ RTS 525A2	STAR	25	20	120V AC 60HZ	1.60	24.13	9.84	RTS 433 MHZ	1134083
MAESTRIA™ RTS 535A2	STAR	35	20	120V AC 60HZ	2.10	26.89	9.84	RTS 433 MHZ	1134084
MAESTRIA™ RTS 550R2	STAR	50	14	120V AC 60HZ	2.10	26.89	9.84	RTS 433 MHZ	1134095

Radio Technology Somfy® (RTS)

The Sonesse® 50 range puts window coverings in motion with quiet precision. It's an ideal choice for a variety of interior and exterior window covering applications. Radio Technology Somfy® (RTS) allows wireless radio control of motorized applications via the RTS family of controls.

Multiple Applications

• Interior, Exterior, Residential, Commercial, Integrated solutions.

Simple Installation & Setup


- · Compatible with leading industry hardware.
- · Can be mounted in the bracket six different ways.
- Features a "snap-on" style connection for roller tube adaptors.
- Interchangeable power cords, or a quick connector with extension options, provide multiple power cord lengths to meet installation demands.
- Radio Technology Somfy (RTS) provides wireless commands to eliminate control
- Limits easily set using a hand-held remote.
- Suitable for tubes diameter 47mm or more (internal diameter)

Wide Compatibility

- Compatible with Somfy's full range of RTS controls and accessories.
- Users can use natural voice and app commands to control motorized products by adding TaHoma.
- Easily integrates with third-party control systems.









Electronic end limits Remote limit setting



MY function



NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
SONESSE® 506S2 RTS	STAR	6	32	120V AC 60HZ	1.20	26.22	9.84	RTS 433 MHZ	1001809
SONESSE® 510S2 RTS	STAR	10	32	120V AC 60HZ	1.67	26.22	9.84	RTS 433 MHZ	1001807
SONESSE® 510S2 RTS RH	ROUND	10	32	120V AC 60HZ	1.67	26.10	9.84	RTS 433 MHZ	1001805















Somfy Digital Network™ (SDN) RS485

Offers an intelligent, two-way wired communication with all the benefits of the Sonesse® range.

Multiple Applications

• Interior, Exterior, Residential, Commercial, and Integrated network solutions.

Simple Installation & Setup

- Compatible with leading industry hardware.
- · Can be mounted in the bracket six different ways.
- Features a "snap-on" style connection for roller tube adaptors.
- Interchangeable power cords, or a quick connector with extension options, provide multiple power cord lengths to meet installation demands.
- Limits can be set using addressable network limit settings.
- Suitable for tubes diameter 47mm or more (internal diameter).

Wide Compatibility


- Compatible with intelligent RS485 technology used with our Somfy Digital Network (SDN).
- Easily integrates with third-party control systems.

Main functions









NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
SONESSE® 506S2 RS485	STAR	6	32	120V AC 60HZ	1.20	26.22	9.84	RS485	1002286
SONESSE® 510S2 RS485	STAR	10	32	120V AC 60HZ	1.66	27.01	9.84	RS485	1002287











Standard Motors - Rapid Limit Adjustment









Experience all the benefits of the Sonesse® range for large multi-banded/coupled window covering applications.

Multiple Applications

• Interior, Exterior, Residential, and Commercial.

Simple Installation & Setup

- Compatible with leading industry hardware.
- Can be mounted in the bracket six different ways.
- Features a "snap-on" style connection for roller tube adaptors.
- Interchangeable power cords, or a quick connector with extension options, provide multiple power cord lengths to meet installation demands.
- · Limits can be set using mechanical rapid adjustment.
- Suitable for tubes diameter 47mm or more (internal diameter).

Compatibility

- · Compatible with wired control options.
- Easily integrates with third-party control systems.
- No power consumption when motor is idle, a green solution.

Main functions






Rapid limit adjustments



Quick & easy settings
















CABLE MOTOR HEAD TORQUE SPEED RATED CURRENT NAME INPUT VOLTAGE LENGTH **TECHNOLOGY** LENGTH NUMBER (INCHES) (FEET) SONESSE® 506S2 STAR 6 32 120V AC 60HZ 1.20 24.25 WIRED 1001814 9.84 SONESSE® 510S2 STAR 10 32 120V AC 60HZ 1.67 24.25 9.84 WIRED 1001813





Standard Motors - Progressive Limit Adjustment



Multiple Applications

• Interior, Exterior, Residential, and Commercial.

Simple Installation & Setup


- · Compatible with leading industry hardware.
- · Can be mounted in the bracket six different ways.
- Features a "snap-on" style connection for roller tube adaptors.
- Interchangeable power cords, or a quick connector with extension options, provide multiple power cord lengths to meet installation demands.
- Limits can be set using mechanical progressive adjustment.
- Power output upon reaching motor limit.
- Suitable for tubes diameter 47mm or more (internal diameter).

Compatibility

- · Compatible with wired control options.
- Easily integrates with third-party control systems.
- No power consumption when motor is idle, a green solution.

Main functions





NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
SONESSE® 506S2 PA	STAR	6	32	120V AC 60HZ	1.20	24.25	0.39	WIRED	1001801











LT50 AC Motors

Somfy Digital Network™ (SDN) RS485

LT50 AC motors offer intelligent two-way communication.

Multiple Applications

• Internal, External, Residential, Commercial, and Integrated network solutions.

Simple Installation & Setup

- · Compatible with leading industry hardware .
- Can be mounted in the bracket six different ways.
- Features a "snap-on" style connection for roller tube adapters.
- Customizable power cord lengths based on installation requirements.
- Limits may be set using progressive screw adjustment buttons, a radio transmitter, or addressable network limit settings.

Easy Integration


- Suitable for tubes diameter 47mm or more (internal diameter)
- Removable cable

Wide Compatibility

- Compatible with the Somfy Digital Network (SDN)
- Easily integrates with third-party control systems

Main functions

ROLLER



SHADES



LAYERED

SHADES



SHEER HORIZONTALS







Electronic end limits Advanced diagnostic



CABLE MOTOR HEAD TORQUE SPEED RATED CURRENT NAME INPUT VOLTAGE LENGTH LENGTH (INCHES) (FEET) 515S2 RS485 STAR 15 38 120V AC 60HZ 1.80 9.84 26.89 535A2 RS485 STAR 35 20 120V AC 60HZ 2.10 26.89 9.84







TECHNOLOGY

RS485

RS485

NUMBER

1002427

1002288





LT50 AC Motors

Standard Motors - Rapid Limit Adjustment

The LT50 AC is a standard 4-wire star head motor, an ideal choice for preconstruction opportunities while the walls are open. Control an individual shade or group of shades with a wired switch.

Installation Advantages

- Adjustable motorhead orientation installs in 6 different positions.
- Power cable is detachable at the motor head for quick replacement when necessary or to manage wire length.
- Drive wheels snap on for quick assembly.
- Rapid push-button limits allow for quick and easy setting and adjustment.
- Optional fast connectors are available in various lengths to avoid the need for an electrician.

Energy Savings

- Act for Green motor, designed to be environmentally friendly.
- Doesn't consume power in standby mode for reduced user costs.










Main functions

Large window







NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
506S2 6/38 SJTW	STAR	6	38	120V AC 60HZ	0.70	20.98	9.84	WIRED	1033401
510S2 10/38 SJTW	STAR	10	38	120V AC 60HZ	1.30	22.17	9.84	WIRED	1038171
515S2 15/38 SJTW	STAR	15	38	120V AC 60HZ	1.80	24.13	9.84	WIRED	1040062
515S2 15/38 RH SJTW	ROUND	15	38	120V AC 60HZ	1.80	24.02	9.84	WIRED	1040061

LT50 Altus® AC Motors

Radio Technology Somfy® (RTS)



Easy Install

- Plug and play motor with no need for costly wiring.
- Interchangeable power cords, or a quick connector with extension options, provide multiple power cord lengths to meet installation demands.
- RTS provides wireless commands to eliminate control wiring.
- · Limits easily set using a hand-held remote.

Comfort & Convenience

- · Long range remote control doesn't require direct line of sight.
- Smartphone and tablet app available for quick and easy control even while away.
- Use natural voice commands to control RTS motorized solutions with TaHoma.

Energy Savings

- Motorized exterior screens can potentially block up to 90% of solar rays.
- Motorized rolling shutters can reduce heat gain in the summer and heat loss in the winter by up to 40%.
- Motorized retractable awnings can reduce heat gain in the summer by 77% while in use.

Protection

- Motorized retractable awnings and exterior screens not only shield occupants from the sun, but offer a cool, comfortable outdoor living space.
- Motorized rolling shutters provide a rigid protective barrier for any space and protect from storm damage.

Main functions







Remote limit setting my



MY function













NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
ALTUS® RTS 506S2	STAR	6	38	120V AC 60HZ	1.10	24.13	9.84	RTS 433 MHZ	1033399
ALTUS® RTS 510S2	STAR	10	38	120V AC 60HZ	1.30	26.10	9.84	RTS 433 MHZ	1038165
ALTUS® RTS 525A2	STAR	25	20	120V AC 60HZ	1.60	24.13	9.84	RTS 433 MHZ	1043423
ALTUS® RTS 530R2	STAR	30	14	120V AC 60HZ	1.50	24.13	9.84	RTS 433 MHZ	1038169
ALTUS® RTS 535A2	STAR	35	20	120V AC 60HZ	2.10	26.89	9.84	RTS 433 MHZ	1038168
ALTUS® RTS 540R2	STAR	40	14	120V AC 60HZ	1.80	26.10	9.84	RTS 433 MHZ	1240556
ALTUS® RTS 550R2	STAR	50	14	120V AC 60HZ	2.10	26.89	9.84	RTS 433 MHZ	1038170













Exterior Screen Accessories





Power Cables

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
4-Conductor Motor Cable SJTW (Sold per Foot)	9012110	8	NEMA Power Plug Not Installed for Sonesse® 40 motor (RTS Version Only)	9017447	
3-Conductor Motor Cable SJTW (Sold per Foot)	9012111				

Power Cables - 3-Conductor Fast Connector & Extensions

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Fast Connector Extension Cable 3C SJTW with NEMA Plug - 10.4 ft.	9020791		Fast Connector Extension Cable 3C SJTW with NEMA Plug - 4.4 ft.	9021114	70
Fast Connector Extension Cable 3C SJTW with NEMA Plug - 18 ft.	9020792		Fast Connector Extension Cable 3C SJTW with NEMA Plug - 8.4 ft.	9021115	
Fast Connector Extension Cable 3C SJTW with NEMA Plug - 24 ft.	9020793		Fast Connector Extension Cable 3C SJTW without NEMA Plug – 8.4 ft.	9021157	
Fast Connector Extension Cable 3C SJTW with NEMA Plug - 1.4 ft.	9021113	C	Panel Mount, 3C Female Fast Connector	9026398	M

Power Cables - 4-Conductor Fast Connector & Extensions

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
Fast Connector Extension Cable 4C SJTW - 4.4 ft.	9021117	Fast Connector Extension Cable 4C SJTW - 16.4 ft.	9021120	
Fast Connector Extension Cable 4C SJTW - 8.4 ft.	9021118	Fast Connector Extension Cable 4C SJTW - 22.4 ft.	9021121	

Crowns & Drives

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Crown and Drive Set (Somfy 40mm x 1.5mm Round Tube)	9012224	00	400 Series Crown and Drive Set (40mm x 0.8mm Octagonal Tube)	9012225	O



Crowns & Drives

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
400 Series to 500 Series Crown and Drive Adaptor Kit	9013763	Oes	Crown (for 40mm x 1.5mm Round Tube)	9147330	O
Soft Drive Wheel 44mm (Acmeda Type)	9013790		Drive for (40mm x 1.5mm Round Tube)	9147544	
Crown Adaptor 44mm Tube (Acmeda Type)	9013791	0	Drive (for 40mm x 0.8mm Octagonal Tube)	9147545	
Drive Adaptor (for 40mm x 1mm Round Tube)	9132142		Anti-Blocking System (ABS) 400 Series Left Rotation	9704138	
Crown Adaptor (for 40mm x 1mm Round Tube)	9132143	0	Anti-Blocking System (ABS) 400 Series Right Rotation	9704139	
40mm Octagonal Crown for 40mm x 0.8mm Octagonal Tube	9147327	0			

Tubes

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
40mm Round Aluminum Tube (ID 36mm) (20 ft. Max Length)	1781153	40mm Octagonal Tube (Minimum Order Length 20')	1781154	

Adaptor Plates

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
R8 Adaptor Plate	9012258	0. t. c.	End Cap for 40mm Octagonal Tube	9012274	0

Idler End Caps

Motor Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
10mm Square Motor Bracket for 400S Motors	9147334	all.	LO Motor Bracket for 400S Motors	9147337	



Motor Brackets

NAME	ITEM NUMBER	
400 Series to 500 Series Motor Mounting Conversion Bracket	9500659	

Tools

NAME	ITEM NUMBER	
Standard Motor Tester Cable, 4-Wire	9012116	

500 Series Accessories

Power Cables

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
4-Conductor Motor Cable SJTW (Sold per Foot)	9012110	8	3-Conductor Motor Cable SJTW (Sold per Foot)	9012111	=

Power Cables - 3-Conductor LT

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable - 10 ft.	9018190	Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable with NEMA Plug - 18 ft.	9021052	
Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable - 24 ft.	9020985	Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable with NEMA Plug - 24 ft.	9021053	
Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable with NEMA Plug - 1.5 ft.	9021049	Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable - 10 ft. (Black)	9028737	? 9
Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable with NEMA Plug - 6 ft.	9021050	Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable - 24 ft. (Black)	9028738	\$
Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable with NEMA Plug - 10 ft.	9021051			



Power Cables - 4-Conductor LT

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
Sonesse® 50 & LT50/LT60 SJTW 4C Cable - 10 ft.	9018345	Sonesse® 50 & LT50/LT60 SJTW 4C Cable - 24 ft.	9021046	23

Power Cables - 3-Conductor Fast Connector & Extensions

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Fast Connector Extension Cable 3C SJTW with NEMA Plug - 10.4 ft.	9020791		Fast Connector Extension Cable 3C SJTW with NEMA Plug - 4.4 ft.	9021114	79
Fast Connector Extension Cable 3C SJTW with NEMA Plug - 18 ft.	9020792		Fast Connector Extension Cable 3C SJTW with NEMA Plug - 8.4 ft.	9021115	
Fast Connector Extension Cable 3C SJTW with NEMA Plug - 24 ft.	9020793		Fast Connector Extension Cable 3C SJTW without NEMA Plug - 8.4 ft.	9021157	
Sonesse® 50 & LT50 RTS/RS485 Motor Pigtail to Fast Connector SJTW 3C Cable - 1.6 ft.	9020803	1	Panel Mount, 3C Female Fast Connector	9026398	M
Fast Connector Extension Cable 3C SJTW with NEMA Plug - 1.4 ft.	9021113				

Power Cables - 4-Conductor Fast Connector & Extensions

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Sonesse® 50 & LT50 Motor Pigtail to Fast Connector SJTW 4C Cable - 1.6 ft.	9020804	1	Fast Connector Extension Cable 4C SJTW - 16.4 ft.	9021120	
Fast Connector Extension Cable 4C SJTW - 4.4 ft.	9021117	2	Fast Connector Extension Cable 4C SJTW - 22.4 ft.	9021121	
Fast Connector Extension Cable 4C SJTW - 8.4 ft.	9021118				



500 Series Accessories Data Cables

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
4-Conductor 26 AWG Modular Cable RJ9 to RJ45 - 2.5 ft. (Data Only, Black)	9018541	0	4-Conductor 26 AWG Modular Cable RJ9 to RJ45 - 2.5 ft. (Power & Data, Grey)	9018545	
4-Conductor 26 AWG Modular Cable RJ9 to RJ45 - 8 ft. (Data Only, Black)	9018542	(0)	4-Conductor 26 AWG Modular Cable RJ9 to RJ45 - 8 ft. (Power & Data, Grey)	9018546	
4-Conductor 26 AWG Modular Cable RJ9 to RJ45 - 12 ft. (Data Only, Black)	9018543	0	4-Conductor 26 AWG Modular Cable RJ9 to RJ45 - 12 ft. (Power & Data, Grey)	9018547	
4-Conductor 26 AWG Modular Cable RJ9 to RJ45 - 24 ft. (Data Only, Black)	9018544	19	4-Conductor 26 AWG Modular Cable RJ9 to RJ45 - 24 ft. (Power & Data, Grey)	9018548	

Crowns & Drives

NAME	ITEM NUMBER		NAME	ITEM NUMBER	61
2.5" (60mm) Round LT50 Set "Hard Clip"	9012231	00	Sonesse® 50 Drive (for 56mm Acmeda Tube 10Nm Max)	9014126	1
2.75" (67mm) Round LT50 Set "Hard Clip"	9012232	00	RollEase "Silent Pin" Crown & Drive Adaptor for 2.5" (63mm) Tube	9015234	C 🌔
P72 LT50 Set	9012235	000	LT50 Drive 70mm Rollerbat	9016059	Q
DS70 LT50 Set (0.8mm - 1mm Kit)	9012237	00	70mm LT50 Crown	9016298	0
DS 74 LT50 Set	9012238	00	Sonesse® 50 Drive Wheel 50mm x 1.5mm Hard Clip- Quiet Accessory for Sonesse® Motors	9016630	
DS 78 LT50 Set	9012239	09	RollEase "Silent Pin" Crown & Drive Adaptor for 3.25" (83mm) Tube	9016855	00
Modified LT60 DS 78 Drive (Key Way Widened)	9012241		RollEase "Silent Pin" Crown Only for RollEase 2.5" (63mm) Tube	9016856	0
Sonesse® 50 Crown (for 56mm Acmeda Tube 10Nm Max)	9014125		Sonesse® 50 Drive Wheel 50mm x 1.5mm Soft Clip- Quiet Accessory for Sonesse® Motors	9018455	1



500 Series Accessories Crowns & Drives

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
LT50 Crown 80mm Rollerbat	9019555		SM65 (63mm) Round Crown - 3 grooves	9707030	Q
LT50 Drive 80mm Rollerbat	9019556	Q	2.75" (67mm) Round Crown	9707031	0
LT50 Crown 70mm Rollerbat	9026982	\oplus	DS 70 LT50 Crown	9707034	0
2.5" Round LT50 Drive "Hard Clip"	9206019		DS 85mm Round Crown	9707035	
2.5" (60mm) Round Drive "Soft Clip"	9206041		SM65 (63mm) Round Drive	9751002	
2" (47mm) Round Drive "Hard Clip"	9206088		DS 70mm Round Drive (0.8mm - 1mm)	9751005	0
2" (47mm) Round Drive "Soft Clip"	9206089		AMA/P71 LT50 Drive	9751015	
3.5" Round LT50/60 Drive (89mm x 2mm)	9420303		DS 78mm Round Drive	9761001	
4.0" Round LT50 Drive	9420304		DS 85mm Round Drive	9761003	
Anti-Blocking System (ABS) 500 Series Right Rotation	9705414		DS 78mm/D Round Drive	9761004	B
Anti-Blocking System (ABS) 500 Series Left Rotation	9705415		DS 78mm/R Round Drive	9761005	0
2.5" (60mm) Round Crown	9707026	0	P72 LT50 Drive	9761011	0
DS 78mm Round Crown	9707027	O	Drive Stop and Screw	9910004	10



500 Series Accessories Crowns & Drives

NAME	ITEM NUMBER
AMA/P71 LT50 Crown	9997118

Tubes

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
56mm OD Aluminum Sonesse® 50 Tube (16 ft. Lengths) - Mill Finish	1780743	2.5" OD Aluminum Tube (Minimum Order Length 16')	1781343	
56mm OD Aluminum Sonesse® 50 Tube (16 ft. Lengths) - White Powder Coat	1780744	RollEase 3.25" (83mm) Profiled Tube	1782096	
2.0" Aluminum Tube (Minimum Order Length 20')	1781148			

Idler End Caps

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
13mm Square Drive Shaft - 12mm OD for End Cap	1781009	-	Idler End Cap without Shaft 2.5" OD with M5 Screw	9129632	(6)
2" Collapsible End Cap (Silent) - 10mm Shaft	9013592	-	2.0" End Cap with 12mm Shaft	9132087	
Sonesse® 50 Pin End Cap 10mm - Quiet Accessory for 2" Tube	9016628	THE B	Heavy Duty End Cap Shaft	9420674	00 10
Sonesse® 50 Pin End Cap 12mm - Quiet Accessory for 2" Tube	9018228	W. C	Universal End Cap - Collapsible 10mm Shaft (for 2" (47mm) Round Tube)	9420800	
2.0" Tube - 10mm Shaft End Cap	9128101	6	Universal End Cap - Collapsible 12mm Shaft (for 2" (47mm) Round Tube)	9420801	
Idler End Cap without Shaft 2.0" OD with M5 Screw	9129631	(D)	Universal End Cap - Collapsible 10mm Shaft (Shorter Pin than Item 9420800)	9420814	0



Idler End Caps

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
2.0" Plastic Idler End Cap – 10mm Shaft	9700958	(63	Roller Tube End Cap with 12mm Hole	9701288	

Motor Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
LT50 Adjustable Universal Motor Bracket	9002550	3	Heavy Duty Angle Plate with Universal Motor Bracket (Max 85Nm)	9420602	0
LT50 Angle Plate for Motor Bracket	9012250		Heavy Duty Angle Bracket for 9430610	9420604	
Pull Off Tool for Spring Ring	9206015	<u></u>	Universal Motor Bracket with Spring Ring	9420631	
LO LT50 Motor Bracket with Stud (25 Nm max.)	9206020	ed t	Motor Bracket "U" Shape	9510658	
LO LT50 Motor Bracket with Stud (25 Nm max.)	9206021	e all e	Spring Ring with Loop	9685025	3
Weld-on Bracket without Spring Ring	9206029	O	LT Compact ST Motor Bracket PA66 with Spring Ring	9708461	O
Spring Ring	9206033		Universal Motor Bracket (Metric) with Spring Ring and Threaded for M8 and M6 Bolts	9910001	
LT50 Adjustable Angle Bracket	9410639		LT50 RH "LO" Plate with Stud (Gold)	9910016	401
LT50 Universal Motor Bracket (50Nm Max)	9410651	5	LT50 RH "LO" Plate with Stud (Silver)	9910017	400
LT Motor Bracket	9410665		Universal Motor Bracket - US Threads	9910021	
LT50 HA Flush Mount Motor Bracket	9410715	0			



500 Series Accessories Intermediate Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
13mm Sq. Intermediate Drive Shaft - 16mm OD for 9146011	1781018		Intermediate Bearing Support for 1781018	9146011	5.00
LT50 Intermediate Bracket with 16mm ID Bearing	9002541		LT50 2" Universal Intermediate Bracket Kit	9410648	
LT50 Adjustable Intermediate Support Bracket for 2" Tube	9012203	100	Heavy Duty LT Intermediate Support Bracket	9420673	

Idler Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Idler Bearing for 12mm Shaft	1781015	6	LT50 Idler Bracket with 12mm Hole Nylon Bearing	9410633	(4)
Ball Support for 9410803 and 9028665	1781030	410	LT50 Idler Bracket with 10mm Hole Nylon Bearing	9410635	()
Idler Bracket 14mm ID	9002540		Nylon ball bearing 10mm ID for 1781030	9410803	
Idler Bracket Kit 10mm (Ball & Holder)	9012657		Heavy Duty Idler Bracket with Idler End Cap Holder	9430603	· IM
Nylon Ball Bearing 12mm ID for 1781030	9028665	6	Nylon Ball Bearing and Holder with 12mm Hole for 9420604	9430610	60
U Shaped Idler Bracket	9127808	O	Idler End Cap Holder (Anti-Vibration)	9540786	
14mm Bearing Plate for Idler Bracket Kit	9146007	. 10	Silent Block Idler Bracket 10mm ID	9701310	0





Miscellaneous Brackets

NAME	ITEM NUMBER	
White Plastic Cover for LT Bracket	9002519	

NAME	ITEM NUMBER	
Light Duty Angle LT50 Type	9410637	

Tools

NAME	ITEM NUMBER	
Standard Motor Tester Cable, 4-Wire	9012116	

NAME	ITEM NUMBER	
RS485 Motor Limit Setting & Address Reader Tool	9017142	1000 co

Screws

NAME	ITEM NUMBER	
Screw for Standard LT50 Motor	9670013	Will F



Pergola Motors



All-Seasons Comfort Automated slat adjustment offers year-round use and protection.



More Life Outdoors Easy backyard living with a pergola powered by Somfy adds value to lifestyle and property.



Power Options RTS-compatible, wired motor for ultimate convenience.



Technologies Available intelligent sensors automatically tilt open or closed based on weather conditions.



Smart Home Integrates with other connected solutions for smart home advantages inside and out.

Pergola Motors

Radio Technology Somfy® (RTS)

A motor dedicated to tilting pergola slats to create livable space users can enjoy in any season. Operate them with LED lights or motorized screens.


Comfort & Convenience

- Easily and reliably control the tilt orientation of Pergola slats so users can maximize the use of outdoor spaces.
- Compatible with other connected solutions so users gain a smart home experience.
- Add optional rain, temperature, and wind sensors to automatically protect spaces against weather conditions.
- Mechanical or electronic end limit settings possible with the control unit.

Radio Technology Somfy® Compatible

- Wired motor compatible with the Pergola 12V/24V RTS Receiver for a complete RTS system.
- Familiar RTS protocol to mix and match control options to maximize product performance.
- Exclusive Somfy "my" feature saves a favorite/preferred product position.


Main functions













PERGOLAS

NAME	FORCE (N)	SPEED (mm/s)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
PERGOLA TILT, 24V 150MM 0° (NOM FORCE: 2500 N)	2 500	2.8	24V DC	1.90	11.42	4.92	WIRED	1230032







Pergola Accessories





Pergola Accessories

Radio Technology Somfy® (RTS) Receivers

NAME	ITEM NUMBER	
Pergola 12V/24V 2-motor RTS Receiver & Antenna Kit	1870488	99999 66

NAME	ITEM NUMBER	
LED RTS 24V DC Receiver	1870872	11111 66

animeo® Building Automation Sensors Outdoor Rain & Sun Sensor

Ondeis® Rain Sensor 9016344

NAME	ITEM NUMBER	
Ondeis® WireFree RTS Rain & Sun Sensor	9019617	

Pergola Sensors

NAME	ITEM NUMBER	
Eolis RTS 60 MPH Wind Sensor 24V DC Kit	1870709	M

Miscellaneous RTS

NAME	ITEM NUMBER				
Remote RTS Antenna	2400472				

Rolling Shutter Motors



Storm Safety An extra layer of defense against severe weather and storm damage.



Power Options A variety of solutions to accommodate a range




Home Protection Tamper-resistant features are a deterrent to potential intruders.



Smart Home Intelligent systems enable control even when away from home, providing peace of mind.



Sensitive to the Environment Energysaving benefits, plus frost protection that preserves the motor in extreme weather.



Technologies Revolutionary rigid links increase performance and ease of installation.



LS40 AC Motor

Standard Motors - Progressive Limit Adjustment



The LS40 AC is a wired, 40mm motor for blinds and screens.

Easy Integration

- Thin and round head.
- Suitable for compact tubes diameter 37mm or more (internal diameter).

Easy Limit Setting


• Down and up end limits set by the progressive adjusting knob on the motor head.

Simple, Effortless, and Comfortable

• Accessible motorization to move blinds, shades, or screens effortlessly.

Main functions





NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
412R2 RH WITHOUT FAST CONNECTOR	ROUND	12	10	120V AC 60HZ	1.05	19.09	6.56	WIRED	1024192





LS40 Altus® AC Motors

Radio Technology Somfy® (RTS)

The LS40 Altus is a universal solution for exterior & interior applications.

Wide Range of Solutions

- Compact 40mm design adapts easily to smaller shading hardware, requiring less mounting space.
- Compatible with Somfy's full range of RTS controls and accessories.

Universal Quick Connector

- Molded in white to match connector and cable colors.
- For interior and exterior IP55 (diameter 40 & 50) motors, radio and wired.
- UL recognized for a safe, easy-to-use connection.
- Plug & play extensions (no electrician needed).
- Limited motor SKUs to effectively manage inventory.
- Flexibility to manage extension lengths as needed.

Main functions



Medium sized blinds



Quick & easy



Electronic end limits Remote limit setting MY function








Compatible with rain, sun, & wind sensors

Compatible end-products



NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
ALTUS® RTS 409R2 RH WITH FAST CONNECTOR	ROUND	9	18	120V AC 60HZ	1.05	19.09	1.64	RTS 433 MHZ	1240261



100







LT50 Oximo™ AC Motors

Radio Technology Somfy® (RTS)

Oximo™ is a smart choice for motorizing rolling shutters. It is compatible with all types of rolling shutters and can be controlled with any Radio Technology Somfy accessory including hand-held remote controls, wireless wall switches, and timers.

Obstacle Detection

• Stops the shutter from coming down automatically when obstacles are detected to protect belongings.

Frost Protection

• Stops the motor if frost or ice freezes the shutter in place, preserving the integrity of the motor and the shutter.


Tamper Resistant

• Resists manual lifting for improved security when used with rigid links.

Automatic Limit Setting


• Flexible limit settings can be adjusted automatically or manually.

Main functions













Remote limit setting







ROLLING SHUTTERS

NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
OXIMO™ RTS 525A2	STAR	25	20	120V AC 60HZ	1.60	26.10	9.84	RTS 433 MHZ	1033402
OXIMO™ RTS 550R2	STAR	50	14	120V AC 60HZ	2.10	26.10	9.84	RTS 433 MHZ	1244793





LT50 CMO AC Motors

Wired

The LT50 CMO is a 120V/60Hz standard tubular motor featuring compact manual override to operate manually when power is not available.

Easy to Install & Use

- Features a compact manual override (CMO) allowing operation in the event of a power failure.
- A standard 4-wire motor is an ideal choice for preconstruction opportunities while the walls are open and operation with a wired switch is preferred.
- Detachable power cable to easily manage wire length or replace if needed.
- Standard control options include wired wall switches.
- Easily set and adjust limits using rapid push-buttons.

Environmentally Friendly

- Designed to save energy.
- Doesn't consume power in standby mode.

Main functions



Quick & easy settings




Rapid limit adjustments



Manual override





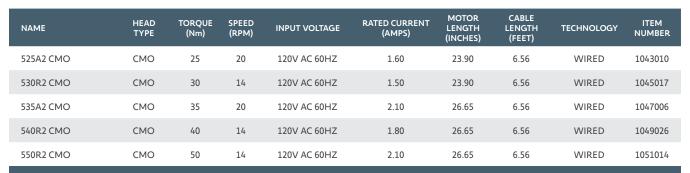





OUTDOOR LIVING

LT50 RTS CMO AC Motors

Radio Technology Somfy® (RTS)

LT50 RTS CMO tubular motors have RTS built-in and feature a compact manual override (CMO).

Easy to Install & Use

- Premier choice for hurricane shutters and retractable awnings.
- 120V tubular motor with built-in RTS.
- Features a compact manual override (CMO) which allows users to operate the motorized application manually when power is not available.
- This motor can be plugged into a standard wall outlet or hard-wired.
- Detachable power cable to easily manage wire length or replace if needed.
- Easily integrates with most home automation systems.
- Compatible with full range of RTS controls and accessories.
- Easily set and adjust limits using rapid push-buttons.

Main functions



Quick & easy settings



Rapid limit adjustments



Manual override



Compatible with rain, sun, & wind sensors



MY function





NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
525A2 RTS CMO	СМО	25	20	120V AC 60HZ	1.60	30.98	9.84	RTS 433 MHZ	1043426
530R2 RTS CMO	СМО	30	14	120V AC 60HZ	1.50	30.98	9.84	RTS 433 MHZ	1051476
535A2 RTS CMO	СМО	35	20	120V AC 60HZ	2.10	30.98	11.48	RTS 433 MHZ	1047306
540R2 RTS CMO	СМО	40	14	120V AC 60HZ	1.80	30.98	9.84	RTS 433 MHZ	1051477
550R2 RTS CMO	СМО	50	14	120V AC 60HZ	2.10	30.98	9.84	RTS 433 MHZ	1051466





LT50 AC Motors

Somfy Digital Network™ (SDN) RS485

LT50 AC motors offer intelligent two-way communication.

Multiple Applications

• Internal, External, Residential, and Commercial, and Integrated network solutions.

Simple Installation & Setup

- Compatible with leading industry hardware.
- Can be mounted in the bracket six different ways.
- Features a "snap-on" style connection for roller tube adapters.
- Customizable power cord lengths based on installation requirements.
- Limits may be set using progressive screw adjustment buttons, a radio transmitter, or addressable network limit settings.

Easy Integration

- Suitable for tubes diameter 47mm or more (internal diameter).
- · Removable cable.


Wide Compatibility

- Compatible with the Somfy Digital Network (SDN).
- Easily integrates with third-party control systems.

SHADES

Main functions

SHADES



SHADES

NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
535A2 RS485	STAR	35	20	120V AC 60HZ	2.10	26.89	9.84	RS485	1002288

SCREENS

SHUTTERS

SCREENS









LT50 AC Motors

Standard Motors - Rapid Limit Adjustment

The LT50 AC is a standard 4-wire star head motor, an ideal choice for preconstruction opportunities while the walls are open. Control an individual shade or group of shades with a wired switch.

Installation Advantages

- Adjustable motorhead orientation installs in 6 different positions.
- Power cable is detachable at the motor head for quick replacement when necessary or to manage wire length.
- Drive wheels snap on for quick assembly.
- Rapid push-button limits allow for quick and easy setting and adjustment.
- Optional fast connectors are available in various lengths to avoid the need for an electrician.

Energy Savings

- Act for Green motor, designed to be environmentally friendly.
- Doesn't consume power in standby mode for reduced user costs.

Main functions







Rapid limit adjustments





NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
510R2 10/14 SJTW	STAR	10	14	120V AC 60HZ	0.70	20.20	9.84	WIRED	1038172
515A2 15/20 SJTW	STAR	15	20	120V AC 60HZ	1.10	20.98	9.84	WIRED	1040063
520R2 20/14 SJTW	STAR	20	14	120V AC 60HZ	1.10	20.98	9.84	WIRED	1042055
525A2 25/20 SJTW	STAR	25	20	120V AC 60HZ	1.60	22.17	9.84	WIRED	1043424
530R2 30/14 SJTW	STAR	30	14	120V AC 60HZ	1.50	22.17	9.84	WIRED	1045793
535A2 35/20 SJTW	STAR	35	20	120V AC 60HZ	2.10	24.13	9.84	WIRED	1047368
540R2 40/14 SJTW	STAR	40	14	120V AC 60HZ	1.80	24.13	9.84	WIRED	1049894
550R2 50/14 SJTW	STAR	50	14	120V AC 60HZ	2.10	24.13	9.84	WIRED	1051464











LT50 Altus® AC Motors

Radio Technology Somfy® (RTS)

LT50 Altus is a tubular motor with no need for an electrician. Compatibility with the full range of RTS controls and accessories.

Easy Install

- Plug and play motor with no need for costly wiring.
- Interchangeable power cords, or a quick connector with extension options, provide multiple power cord lengths to meet installation demands.
- RTS provides wireless commands to eliminate control wiring.
- · Limits easily set using a hand-held remote.

Comfort & Convenience

- · Long range remote control doesn't require direct line of sight.
- Smartphone and tablet app available for quick and easy control even while away.
- Use natural voice commands to control RTS motorized solutions with TaHoma.

Energy Savings

- Motorized exterior screens can potentially block up to 90% of solar rays.
- Motorized rolling shutters can reduce heat gain in the summer and heat loss in the winter by up to 40%.
- Motorized retractable awnings can reduce heat gain in the summer by 77% while in use.

Protection


- Motorized retractable awnings and exterior screens not only shield occupants from the sun, but offer a cool, comfortable outdoor living space.
- Motorized rolling shutters provide a rigid protective barrier for any space and protect from storm damage.

Main functions













Compatible end-products



SHADES













NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
ALTUS® RTS 525A2	STAR	25	20	120V AC 60HZ	1.60	24.13	9.84	RTS 433 MHZ	1043423
ALTUS® RTS 530R2	STAR	30	14	120V AC 60HZ	1.50	24.13	9.84	RTS 433 MHZ	1038169
ALTUS® RTS 535A2	STAR	35	20	120V AC 60HZ	2.10	26.89	9.84	RTS 433 MHZ	1038168
ALTUS® RTS 540R2	STAR	40	14	120V AC 60HZ	1.80	26.10	9.84	RTS 433 MHZ	1240556
ALTUS® RTS 550R2	STAR	50	14	120V AC 60HZ	2.10	26.89	9.84	RTS 433 MHZ	1038170









OUTDOOR LIVING

LT60 AC Motors

Wired

A standard 4-wire star head motor, an ideal choice for pre-construction opportunities while the walls are open. Control an individual shade or group of shades with a wired switch.

Installation Advantages

- Adjustable motorhead orientation installs in six different positions.
- Power cable is detachable at the motor head for quick replacement when necessary or to manage wire length.
- Drive wheels snap on for quick assembly.
- Rapid push-button limits allow for quick and easy setting and adjustment.

Energy Savings

- Act for Green motor, designed to be environmentally friendly.
- Doesn't consume power in standby mode for reduced user costs.

Main functions



Quick & easy settings



Rapid limit adjustments

Compatible end-products







NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
660R2 60/14 SJTW	STAR	60	14	120V AC 60HZ	2.50	26.18	9.84	WIRED	1162272
680R2 80/14 SJTW	STAR	80	14	120V AC 60HZ	3.40	26.18	9.84	WIRED	1164262
6100R2 100/14 SJTW	STAR	100	14	120V AC 60HZ	3.80	26.18	9.84	WIRED	1166290











LT60 Altus® AC Motors

Radio Technology Somfy® (RTS)



Easy Install

- Can be plugged into a standard wall outlet or in-wall wired.
- · Limits quickly set and adjusted from the transmitter.
- Starhead motor reduces the light gap.

Radio Technology Somfy

- Compatible with all RTS-powered systems, controls, and accessories so users can mix and match options to maximize product performance.
- Exclusive Somfy "my" feature saves a favorite/preferred product position.
- RTS is omni-directional, so no need to aim the remote at the product being controlled.

Main functions



Quick & easy settings





Remote limit setting Compatible with rain, sun, & wind sensors



MY function



Electronic end limits

Compatible end-products







NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
ALTUS® RTS 660R2	STAR	60	14	120V AC 60HZ	2.50	27.56	9.84	RTS 433 MHZ	1162271
ALTUS® RTS 680R2	STAR	80	14	120V AC 60HZ	3.40	29.13	9.84	RTS 433 MHZ	1164261
ALTUS® RTS 6100R2	STAR	100	14	120V AC 60HZ	3.80	29.13	9.84	RTS 433 MHZ	1166289

CRUIS GREEN



LT60 CMO AC Motors

Wired

LT60 CMO standard tubular motors are ideal for larger applications. They feature a compact manual override for when power is not available.

Ease of Installation

- Standard 4-wire motor is an ideal choice for preconstruction opportunities while the walls are open and operation with a wired switch is preferred.
- Standard control options include wired wall switches.
- Easily set and adjust limits using rapid push-buttons.
- Detachable power cable to easily manage wire length, or replace if needed.

Environmentally Friendly

- Designed to save energy.
- Doesn't consume power in standby mode.

Main functions



Quick & easy settings



Rapid limit adjustments



Manual override

Compatible end-products







NAME	HEAD TYPE	TORQUE (Nm)	SPEED (RPM)	INPUT VOLTAGE	RATED CURRENT (AMPS)	MOTOR LENGTH (INCHES)	CABLE LENGTH (FEET)	TECHNOLOGY	ITEM NUMBER
660R2 CMO	СМО	60	14	120V AC 60HZ	2.50	25.79	6.56	WIRED	1162014
680R2 CMO	СМО	80	14	120V AC 60HZ	3.40	27.17	6.56	WIRED	1164013
6100R2 CMO	СМО	100	14	120V AC 60HZ	3.80	27.17	6.56	WIRED	1166016





Rolling Shutter Accessories



· ·



Power Cables

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
4-Conductor Motor Cable SJTW (Sold per Foot)	9012110	8	NEMA Power Plug Not Installed for Sonesse® 40 motor (RTS Version Only)	9017447	
3-Conductor Motor Cable SJTW (Sold per Foot)	9012111				

Power Cables - 3-Conductor Fast Connector & Extensions

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Fast Connector Extension Cable 3C SJTW with NEMA Plug - 10.4 ft.	9020791		Fast Connector Extension Cable 3C SJTW with NEMA Plug - 4.4 ft.	9021114	79
Fast Connector Extension Cable 3C SJTW with NEMA Plug - 18 ft.	9020792		Fast Connector Extension Cable 3C SJTW with NEMA Plug – 8.4 ft.	9021115	
Fast Connector Extension Cable 3C SJTW with NEMA Plug - 24 ft.	9020793		Fast Connector Extension Cable 3C SJTW without NEMA Plug – 8.4 ft.	9021157	
Fast Connector Extension Cable 3C SJTW with NEMA Plug - 1.4 ft.	9021113	C	Panel Mount, 3C Female Fast Connector	9026398	13

Power Cables - 4-Conductor Fast Connector & Extensions

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Fast Connector Extension Cable 4C SJTW - 4.4 ft.	9021117	0	Fast Connector Extension Cable 4C SJTW - 16.4 ft.	9021120	
Fast Connector Extension Cable 4C SJTW - 8.4 ft.	9021118		Fast Connector Extension Cable 4C SJTW - 22.4 ft.	9021121	

Crowns & Drives

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Crown and Drive Set (Somfy 40mm x 1.5mm Round Tube)	9012224	00	400 Series Crown and Drive Set (40mm x 0.8mm Octagonal Tube)	9012225	O



Crowns & Drives

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
400 Series to 500 Series Crown and Drive Adaptor Kit	9013763	Oes	Crown (for 40mm x 1.5mm Round Tube)	9147330	O
Soft Drive Wheel 44mm (Acmeda Type)	9013790		Drive for (40mm x 1.5mm Round Tube)	9147544	
Crown Adaptor 44mm Tube (Acmeda Type)	9013791	0	Drive (for 40mm x 0.8mm Octagonal Tube)	9147545	
Drive Adaptor (for 40mm x 1mm Round Tube)	9132142		Anti-Blocking System (ABS) 400 Series Left Rotation	9704138	
Crown Adaptor (for 40mm x 1mm Round Tube)	9132143	0	Anti-Blocking System (ABS) 400 Series Right Rotation	9704139	
40mm Octagonal Crown for 40mm x 0.8mm Octagonal Tube	9147327	0			

Tubes

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
40mm Round Aluminum Tube (ID 36mm) (20 ft. Max Length)	1781153	40mm Octagonal Tube (Minimum Order Length 20')	1781154	

Adaptor Plates

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
R8 Adaptor Plate	9012258	0. th	End Cap for 40mm Octagonal Tube	9012274	0

Idler End Caps

Motor Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
10mm Square Motor Bracket for 400S Motors	9147334	(a)	LO Motor Bracket for 400S Motors	9147337	



400 Series Accessories Motor Brackets

NAME	ITEM NUMBER	
400 Series to 500 Series Motor Mounting Conversion Bracket	9500659	

Tools

NAME	ITEM NUMBER	
Standard Motor Tester Cable, 4-Wire	9012116	

500 Series Accessories

Power Cables

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
4-Conductor Motor Cable SJTW (Sold per Foot)	9012110	8	3-Conductor Motor Cable SJTW (Sold per Foot)	9012111	P

Power Cables - 3-Conductor LT

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable - 10 ft.	9018190	Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable with NEMA Plug - 18 ft.	9021052	
Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable - 24 ft.	9020985	Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable with NEMA Plug - 24 ft.	9021053	
Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable with NEMA Plug - 1.5 ft.	9021049	Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable - 10 ft. (Black)	9028737	? 9
Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable with NEMA Plug - 6 ft.	9021050	Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable - 24 ft. (Black)	9028738	\$
Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable with NEMA Plug - 10 ft.	9021051			



Power Cables - 3-Conductor CMO

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
LT50 CMO RTS Cable with 5–15P Right Angle NEMA Plug – 12 ft.	9012148	LT50 CMO RTS SJTW 3C Cable - 10 ft.	9021025	a l
LT50 CMO RTS Cable with 5–15P Right Angle NEMA Plug – 24 ft.	9012149	LT50 CMO RTS SJTW 3C Cable - 24 ft.	9021047	9
LT50 CMO RTS Cable with 5-15P Right Angle NEMA Plug - 18 ft.	9012150			

Power Cables - 4-Conductor LT

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
Sonesse® 50 & LT50/LT60 SJTW 4C Cable - 10 ft.	9018345	Sonesse® 50 & LT50/LT60 SJTW 4C Cable - 24 ft.	9021046	EN

Power Cables - 4-Conductor CMO

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
CMO Motor Cable - 12 ft.	9012137	G.	CMO Motor Cable - 24 ft.	9208308	i er
CMO Motor Cable - 6 ft.	9208302	Q			

Power Cables - 3-Conductor Fast Connector & Extensions

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
Fast Connector Extension Cable 3C SJTW with NEMA Plug - 10.4 ft.	9020791	Sonesse® 50 & LT50 RTS/RS485 Motor Pigtail to Fast Connector SJTW 3C Cable – 1.6 ft.	9020803	
Fast Connector Extension Cable 3C SJTW with NEMA Plug - 18 ft.	9020792	Fast Connector Extension Cable 3C SJTW with NEMA Plug – 1.4 ft.	9021113	
Fast Connector Extension Cable 3C SJTW with NEMA Plug - 24 ft.	9020793	Fast Connector Extension Cable 3C SJTW with NEMA Plug - 4.4 ft.	9021114	70



Power Cables - 3-Conductor Fast Connector & Extensions

NAME	ITEM NUMBER	0	NAME	ITEM NUMBER	e.
Fast Connector Extension Cable 3C SJTW with NEMA Plug - 8.4 ft.	9021115		Panel Mount, 3C Female Fast Connector	9026398	13
Fast Connector Extension Cable 3C SJTW without NEMA Plug – 8.4 ft.	9021157				

Power Cables - 4-Conductor Fast Connector & Extensions

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Sonesse® 50 & LT50 Motor Pigtail to Fast Connector SJTW 4C Cable - 1.6 ft.	9020804		Fast Connector Extension Cable 4C SJTW - 16.4 ft.	9021120	
Fast Connector Extension Cable 4C SJTW - 4.4 ft.	9021117	2	Fast Connector Extension Cable 4C SJTW - 22.4 ft.	9021121	
Fast Connector Extension Cable 4C SJTW - 8.4 ft.	9021118				

Data Cables

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
4-Conductor 26 AWG Modular Cable RJ9 to RJ45 - 2.5 ft. (Data Only, Black)	9018541	0	4-Conductor 26 AWG Modular Cable RJ9 to RJ45 - 2.5 ft. (Power & Data, Grey)	9018545	
4-Conductor 26 AWG Modular Cable RJ9 to RJ45 - 8 ft. (Data Only, Black)	9018542	0	4-Conductor 26 AWG Modular Cable RJ9 to RJ45 - 8 ft. (Power & Data, Grey)	9018546	
4-Conductor 26 AWG Modular Cable RJ9 to RJ45 - 12 ft. (Data Only, Black)	9018543	0	4-Conductor 26 AWG Modular Cable RJ9 to RJ45 - 12 ft. (Power & Data, Grey)	9018547	
4-Conductor 26 AWG Modular Cable RJ9 to RJ45 - 24 ft. (Data Only, Black)	9018544	10	4-Conductor 26 AWG Modular Cable RJ9 to RJ45 - 24 ft. (Power & Data, Grey)	9018548	



500 Series Accessories Crowns & Drives

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
2.5" (60mm) Round LT50 Set "Hard Clip"	9012231	00	2.5" (60mm) Round Drive "Soft Clip"	9206041	
2.75" (67mm) Round LT50 Set "Hard Clip"	9012232	00	3.5" Round LT50/60 Drive (89mm x 2mm)	9420303	
60mm Octagonal LT50 Set	9012233	00	4.0" Round LT50 Drive	9420304	
70mm Octagonal LT50 Set	9012234	00	Anti-Blocking System (ABS) 500 Series Right Rotation	9705414	
70mm Octagonal LT50 Crown	9012328	0	Anti-Blocking System (ABS) 500 Series Left Rotation	9705415	
RollEase "Silent Pin" Crown & Drive Adaptor for 2.5" (63mm) Tube	9015234	O 🏉	2.5" 60mm Octagonal Crown	9707025	0
LT50 Drive 70mm Rollerbat	9016059	Q	2.5" (60mm) Round Crown	9707026	0
LT50 Crown 80mm Rollerbat	9019555		60mm Octagonal Drive	9751001	
LT50 Drive 80mm Rollerbat	9019556	()	70mm Octagonal Drive	9761002	
LT50 Crown 70mm Rollerbat	9026982	\bigcirc	Drive Stop and Screw	9910004	10
2.5" Round LT50 Drive "Hard Clip"	9206019				

Tube Components

NAME	ITEM NUMBER	NAME	ITEM NUMBER
Rigid Link GS Slat 9mm 1 Limb	9019327	Rigid Link GS Slat 14mm 1 Limb	9019328



Tube Components

NAME	ITEM NUMBER	1
Rigid Link GS Slat 9mm 2 Limbs	9019329	R

NAME	ITEM NUMBER	
Rigid Link GS Slat 14mm 2 Limbs	9019330	Carlo

Override Parts

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Connector Sleeve 7mm Hex to 8mm Square	9012323		Connector Sleeve 7mm Hex to 7mm Hex	9685120	
Short Awning Override Shaft Ring	9016332	-	CMO Awning Override Shaft (170mm Long)	9685136	
Extension Shaft 7mm Hex L=220mm with Screw	9420657	\	CMO Awning Override Shaft (100mm Long)	9685148	
Extension Shaft 7mm Hex L=330mm with Screw	9420659	\	CMO Motor Limit Setting Tool	9910019	1

Idler End Caps

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
13mm Square Drive Shaft - 12mm OD for End Cap	1781009	-	Heavy Duty End Cap Shaft	9420674	00 to
Idler End Cap without Shaft 2.0" OD with M5 Screw	9129631	(0)	2.0" Plastic Idler End Cap - 10mm Shaft	9700958	To.
Idler End Cap without Shaft 2.5" OD with M5 Screw	9129632				

Motor Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
LT50 Adjustable Universal Motor Bracket	9002550	-G	LT50 Angle Plate for Motor Bracket	9012250	



Motor Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Pull Off Tool for Spring Ring	9206015	a	DMI Bracket 100mm x 100mm	9706034	11
Weld-on Bracket without Spring Ring	9206029	0	LT Compact ST Motor Bracket PA66 with Spring Ring	9708461	0
Spring Ring	9206033		Motor Bracket with Spring Ring - Square (120mm x 120mm)	9763503	43
LT50 Adjustable Angle Bracket	9410639		Motor Bracket with Spring Ring - Square (100mm x 100mm)	9763508	**
LT50 Universal Motor Bracket (50Nm Max)	9410651	5	Universal Motor Bracket (Metric) with Spring Ring and Threaded for M8 and M6 Bolts	9910001	0
LT50 HA Flush Mount Motor Bracket	9410715	0	LT50 RH "LO" Plate with Stud (Gold)	9910016	ore!
Heavy Duty Angle Plate with Universal Motor Bracket (Max 85Nm)	9420602	0	LT50 RH "LO" Plate with Stud (Silver)	9910017	100
Heavy Duty Angle Bracket for 9430610	9420604		Universal Motor Bracket - US Threads	9910021	
Universal Motor Bracket with Spring Ring	9420631	O	CMO/Standard LT Conversion Motor Bracket - US Threads	9910051	(8)
Spring Ring with Loop	9685025	8			

Intermediate Brackets

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
13mm Sq. Intermediate Drive Shaft - 16mm OD for 9146011	1781018	LT50 Adjustable Intermediate Support Bracket for 2" Tube	9012203	Don
LT50 Intermediate Bracket with 16mm ID Bearing	9002541	Intermediate Bearing Support for 1781018	9146011	. 6.



Intermediate Brackets

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
LT50 2" Universal Intermediate Bracket Kit	9410648	Heavy Duty LT Intermediate Support Bracket	9420673	-

Idler Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Idler Bearing for 12mm Shaft	1781015	-	LT50 Idler Bracket with 12mm Hole Nylon Bearing	9410633	(4)
Ball Support for 9410803 and 9028665	1781030	40	LT50 Idler Bracket with 10mm Hole Nylon Bearing	9410635	(F)
ldler Bracket 14mm ID	9002540		Nylon ball bearing 10mm ID for 1781030	9410803	
ldler Bracket Kit 10mm (Ball & Holder)	9012657		Heavy Duty Idler Bracket with Idler End Cap Holder	9430603	柳
Nylon Ball Bearing 12mm ID for 1781030	9028665	6	Nylon Ball Bearing and Holder with 12mm Hole for 9420604	9430610	60
U Shaped Idler Bracket	9127808	Out	ldler End Cap Holder (Anti-Vibration)	9540786	
14mm Bearing Plate for Idler Bracket Kit	9146007	. 180	Silent Block Idler Bracket 10mm ID	9701310	0

Miscellaneous Brackets

NAME	ITEM NUMBER	
Light Duty Angle LT50 Type	9410637	



Tools

NAME	ITEM NUMBER	NAME
Standard Motor Tester Cable, 4-Wire	9012116	RS485 Motor Limit Setting & Address Reader Tool



9017142

Screws

NAME	ITEM NUMBER	
Screw for Standard LT50 Motor	9670013	Will P

600 Series Accessories

Power Cables

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
4-Conductor Motor Cable SJTW (Sold per Foot)	9012110	8	3-Conductor Motor Cable SJTW (Sold per Foot)	9012111	P

Power Cables - 3-Conductor LT

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable - 10 ft.	9018190		Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable with NEMA Plug - 18 ft.	9021052	
Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable - 24 ft.	9020985	EN	Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable with NEMA Plug - 24 ft.	9021053	
Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable with NEMA Plug - 1.5 ft.	9021049		Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable - 10 ft. (Black)	9028737	9
Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable with NEMA Plug - 6 ft.	9021050		Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable - 24 ft. (Black)	9028738	@
Sonesse® 50 & LT50/LT60 RTS/RS485 SJTW 3C Cable with NEMA Plug - 10 ft.	9021051	2			



Power Cables - 4-Conductor LT

NAME	ITEM NUMBER	NAME	ITEM NUMBER
Sonesse® 50 & LT50/LT60 SJTW 4C Cable - 10 ft.	9018345	Sonesse® 50 & LT50/LT60 SJTW 4C Cable - 24 ft.	9021046

Power Cables - 4-Conductor CMO

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
CMO Motor Cable - 12 ft.	9012137	G.	CMO Motor Cable - 24 ft.	9208308	a.
CMO Motor Cable - 6 ft.	9208302	Q.			

Crowns & Drives

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Drive Stop for LT60	9012194	0.	2.5" Round LTS0 Drive "Hard Clip"	9206019	
4.0" Round LT60 Set	9012221	00	2.5" (60mm) Round Drive "Soft Clip"	9206041	(A)
2.75" Round LT60 Set "Hard Clip"	9012246	00	3.5" Round LT50/60 Drive (89mm x 2mm)	9420303	
70mm Octagonal LT60 Set	9012247	00	4.0" Round LT50 Drive	9420304	
LT60 Crown 80mm Rollerbat	9019557		LT60 Drive Wheel 101.6mm X 3.6mm	9420309	(8)
LT60 Drive 80mm Rollerbat	9019558	Q	2.75" (67mm) Round Crown	9420342	0
LT60 Stop Wheel Screw	9205870		4.0" Round Crown	9420370	0



Crowns & Drives

NAME	ITEM NUMBER	•
3.5" Round Crown (89mm x 2mm)	9520312	O
70mm Octagonal LT60 Crown	9705340	0

NAME	ITEM NUMBER	
70mm Octagonal Drive	9761002	

Override Parts

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Connector Sleeve 7mm Hex to 8mm Square	9012323		Connector Sleeve 7mm Hex to 7mm Hex	9685120	_
Short Awning Override Shaft Ring	9016332		CMO Awning Override Shaft (170mm Long)	9685136	
Extension Shaft 7mm Hex L=220mm with Screw	9420657	\	CMO Awning Override Shaft (100mm Long)	9685148	
Extension Shaft 7mm Hex L=330mm with Screw	9420659	\	CMO Motor Limit Setting Tool	9910019	1

Idler End Caps

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
13mm Square Drive Shaft - 12mm OD for End Cap	1781009	-	Heavy Duty End Cap Shaft	9420674	000
Idler End Cap without Shaft 2.5" OD with M5 Screw	9129632				

Motor Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Pull Off Tool for Spring Ring	9206015	<u>م</u>	Weld-on Bracket without Spring Ring	9206029	O





Motor Brackets

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Spring Ring	9206033		DMI Bracket 100mm x 100mm	9706034	11
Heavy Duty Angle Plate with Universal Motor Bracket (Max 85Nm)	9420602	0	Motor Bracket with Spring Ring - Square (120mm x 120mm)	9763503	13
Heavy Duty Angle Bracket for 9430610	9420604	b	Motor Bracket with Spring Ring - Square (100mm x 100mm)	9763508	**
Universal Motor Bracket with Spring Ring	9420631		Universal Motor Bracket (Metric) with Spring Ring and Threaded for M8 and M6 Bolts	9910001	0
Motor Bracket LT60	9430601	0	Universal Motor Bracket - US Threads	9910021	0
Spring Ring with Loop	9685025	8	CMO/Standard LT Conversion Motor Bracket - US Threads	9910051	(8)

Intermediate Brackets

NAME	ITEM NUMBER	٨
Heavy Duty LT Intermediate Support Bracket	9420673	Н

Idler Brackets

NAME	ITEM NUMBER		
Heavy Duty Idler Bracket with Idler End Cap Holder	9430603		

Tools

NAME	ITEM NUMBER		
Standard Motor Tester Cable, 4-Wire	9012116		







Controls & Sensors

Somfy® offers a wealth of experience in control and sensor systems that simplify the experience for the user and help to ensure greater efficiency, comfort, performance, and cost-savings in virtually any building type.

Wireless Technologies	272
Intelligent Controls	276
Controls	281
Sensors	323

Wireless Technologies

Somfy provides a variety of easy-to-use and easy-to-install motor and control solutions to fit every consumer — residential or commercial — regardless of need or budget.

RTS Technology (Radio Technology Somfy®)

With one-touch simplicity, RTS controls send out a radio wave signal to move any motorized interior window covering or exterior pergola, screen, awning, or rolling shutter.

- RTS is omnidirectional and operates reliably at 20 feet (up to 65 feet under optimal conditions).
- The control signal carries commands one way from controller to motor.
- Up to 12 programmable control devices and three sensors can control a single RTS motorized application.
- Users can operate controllers to raise/open window coverings, to lower/close them, or to move them to a pre-programmed favorite "my" position.

Somfy hand-held RTS remote controls are sleek, easy to program, easy to use, and offer easy portability for total control from any spot in the room.

Somfy RTS wall switches are totally wireless, install quickly with no need for an electrician, and are available with multi-channel functionality to easily control multiple motors.

RTS sensors provide information on interior and exterior conditions in real time to controllers, enabling them to adjust shading as needs change.

All Somfy RTS controllers are designed to work together seamlessly so users can enjoy the simplicity of a wall-mounted switch or the portable convenience of a remote — whatever suits the moment.

TaHoma® app-based systems offer simple, intuitive control of motorized systems using a smart device from virtually anywhere that has an internet connection.



All Somfy RTS motors are designed to work seamlessly with Somfy RTS control and sensor systems. To ensure compatibility, simply look for the RTS (Radio Technology Somfy) emblem.







Zigbee® 3.0 Technology

Zigbee is an open, forward-looking protocol that offers outstanding flexibility and ensures future compatibility with other certified products. It allows bi-directional communication, so the user can send commands from anywhere and receive real-time feedback on equipment status, battery level, and more to help provide peace of mind.

Zigbee 3.0 creates its own smart ecosystem, which enables Somfy products to easily communicate with each other and allows control from a single source. The technology is very reliable and stable; it avoids interference from other devices during installation and use. And as a mesh network, it gains strength as more constantly powered devices are added to the system. It's innovation that provides the comfort of seamless control.

Somfy is a Connectivity Standards Alliance board member and is proud to be part of a community recognized as the world leader for interoperable smart products. All Zigbee 3.0 products are cross-compatible and easily work together, including smart lighting, smart shades, security systems, and HVAC systems.





Intelligent Controls

To meet the needs of designers, builders, building owners, management, and clients, Somfy offers intelligent control and real-time sensor systems that are compatible with most common industry technologies — including networked control systems using either Power over Ethernet, digital technology, or direct control using analog electronics.

Power Over Ethernet (PoE)

Integrating Somfy motors and controls into Power over Ethernet (PoE) systems distributes network signals and power to transmit communication over standard network cabling to shades and draperies.

Using PoE in new construction or renovation projects can lower infrastructure costs and capital expenses by eliminating wall circuits for endpoints and consolidating continuous power supply systems. It saves deployment time by reducing the stages of construction and installation. Using PoE technology also helps save on energy costs via Cisco energy-management systems and improves performance with intelligent load-shedding capabilities.

Somfy Digital Network™ (SDN)

The Somfy Digital Network (SDN) is a bi-directional RS485 network that provides control of, and continuous feedback from, each motor on the network. This allows the ability to view the position and status of any motor on the network in real time.

SDN runs over standard network architecture, allowing users to establish a remote connection to the system from anywhere with internet access. It works either as a standalone option or including animeo® IP, with different control options for each.

0-10V to SDN Interface

Available with Somfy Digital Network (SDN) devices, the 0-10V to SDN Interface accepts lighting control dimming commands to operate Somfy RS485 motors. It offers "plug and play" operating simplicity as a shade-control device by controlling all motors without additional programming.

- It converts 0-10V analog inputs to broadcast SDN commands, controlling motors from most lighting control systems.
- 0-10V to SDN integration can be used in multiple ways group control of a small SDN system can be started by an SDN 0-10V interface, or an SDN or animeo IP system could receive commands from a 0-10V input similar to keypad controls.




All Somfy Digital Network (SDN) motors are all designed for compatibility and bi-directional communication with SDN controls, interfaces, and sensors. Look for the SDN logo when ordering.







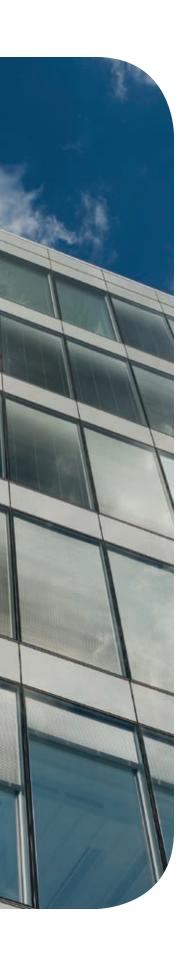

animeo IP

Somfy animeo IP is an automated natural light management system utilizing Somfy-powered intelligent motorized window coverings, as well as digital keypads and weather sensors. The system's controllers, sensors, and keypads work with both new and existing SDN motor installations, allowing comprehensive solar management as a stand-alone solution or integrated into third-party control systems.

An intuitive user interface allows for simplified commissioning, building management, and technical support featuring drag-and-drop programming, motor auto-discovery, and at-a-glance real-time system status updates.

animeo IB+

The animeo IB+ Touch Building Controller is a simplified, intuitive control interface for small and medium-sized buildings that provides sophisticated design, a user-friendly graphical interface, and customized functionality, all at the user's fingertips. It features a built-in "co-pilot" that offers end users a step-by-step guide, real-time sensor integration, and easy maintenance.

- Scalable number of configurable zones for any project, in series of four or eight zones per unit
- Applicable for shades, blinds, screens, rolling shutters, and window openers
- Glare control for optimal visual comfort as the sun moves across the sky
- Automatic retraction of exterior window coverings for protection in case of high winds, frost, or fire
- Data storage for tracking events, settings, sensor values, etc. for three months
- Multi-unit interaction with a single weather station for consistent automation throughout the building

Wired Technology

Somfy's wired control systems offer a cost-effective solution that is typically used for applications requiring small to large torque ranges in new construction, or for retrofits where wiring can be run without difficulty.

We provide a variety of individual control options utilizing dry contact (DCT) or wired switches for commercial building systems. The motor options available for wired technology are durable, dependable, and feature a wide range of torques and speeds for interior or exterior motorized shading applications.

The Somfy Individual Group Control (IGC) 4n1 Motor Controller is a scalable wired device that enables individual and group control for up to four Somfy® Wired Technology (WT) motors. It allows three intermediate positions per motor, preset at 25%, 50%, and 75% openness, or users can set custom intermediate positions with a DecoFlex Dry Contact Keypad. Daisy-chaining multiple 4n1 controllers together allows simple, synchronized control from a single keypad.

Sensor Systems

Somfy offers a variety of sensor devices designed to integrate and communicate with commercial building control systems. These sensors detect and measure exterior conditions — such as sun intensity, temperature, wind, and moisture — and deliver real-time data to building controllers, allowing them to adjust shading systems to suit current conditions throughout the day.



Controls



Customized Control Operate multiple shades, awnings and screens for ultimate control.



Smart Home Compatible with Amazon Alexa, Google Assistant, Samsung SmartThings, and most third-party systems.



Flexibility Variety of control options to fit any user preference, including handheld transmitters, wireless wall switches, app control, or a combination.



Intelligent Building Control Scalable for large commercial facilities, with centralized, individual or group controls.



Coordinated Control Operate motorized products along with lights, thermostats and other connected devices.

Wireless Integrated App Controls

The TaHoma® switch can control up to 60 Somfy Zigbee products and 40 channels of Radio Technology Somfy® (RTS) motorized products. The TaHoma® app enables users to setup and configure their products, and access their smart shading from anywhere.

TaHoma also enables integration with third-party control systems by leveraging the Somfy Synergy™ API.

Streamlined Smart Shading Offer

- Somfy motors fitting nearly any interior style of shades, blinds or draperies.
- TaHoma® pro app for simpler fabrication, motor setting, and installation.
- TaHoma® switch smart hub for a solid, reliable network.
- TaHoma® app giving homeowners the ability to connect, control, and customize.
- Ysia remote for direct control of window coverings.

Pro Tools Make it Easy to Set Up using an App!

- Simple: Each motor has a QR code that can be scanned for a one-to-one connection over Bluetooth, no crosstalk that can slow down a production line or installation process.
- Intuitive: With a step-by-step process to configure motor settings and set end limits, manufacturers save time training new and current production staff.
- <u>Self-Contained</u>: With the entire configuration set from the app, you'll avoid the complicated button dance that requires memorizing or referring to extensive setup documentation.
- <u>Hassle-free</u>: Easier and less time-consuming to set up the network or adjust limits.

Comfort-Driven Ecosystem

- Ease production without slowing down manufacturing and productivity.
- Every installation done in less time, the first time.
- Peace of mind that smart shades, blinds, or draperies will work seamlessly with any future change in smart home tech.
- Join up to 10 TaHoma interfaces for multi-zone control (RTS).
- Offer users voice control with Amazon Alexa, Google Home, and Apple Home (where applicable for Zigbee products only).
- · Apple Home compatibility is only supported for TaHoma switch used with select Zigbee technology motors. See motor specifications for details.

Main functions



voice control



Customizable





Easy integration



9028054

INPUT VOLTAGE TECHNOLOGY NAME **ITEM NUMBER** TAHOMA® SWITCH 120V AC 60HZ RTS/ZIGBEE 1871037

NAME	ITEM NUMBER	NAME
TaHoma® switch (with ethernet adaptor)	1871038	TaHoma® switch Ethernet Adaptor

















Ysia Zigbee Transmitters



Ysia offers simple, convenient control for motorized window coverings. Available in a clean white finish sporting a sleek, modern look, it adds a touch of elegance to every décor. Ysia can be used as a direct control for Somfy Zigbee devices or part of a connected TaHoma® switch system.

Comfort & convenience

- · Simple, intuitive design.
- Operates Somfy-powered Zigbee window coverings and Smart Plugs.
- Control one individual or one group of motorized Zigbee products.
- MY button saves a favorite position for quick and easy access.
- · LED feedback provides visual confirmation.
- Optional wall bracket included.

Main functions



Easy-to-use



MY function

NAME	TECHNOLOGY	ITEM NUMBER
YSIA 1 ZIGBEE	ZIGBEE	1871153
YSIA 5 ZIGBEE	ZIGBEE	1871154

Ysia 5 Variation Zigbee



Ysia 5 Variation Zigbee offers simple, precise control for motorized tilting and layered window coverings. Available in a clean white finish sporting a sleek, modern look, it adds a touch of elegance to every décor. The Ysia 5 Variation can be used as a direct control for Somfy Zigbee devices or part of a connected TaHoma® switch system.

Comfort & convenience

- Scroll wheel for precise control for tilting and layered Zigbee shades or blinds.
- Operates Zigbee window coverings and Smart Plugs.
- Control one individual or one group of motorized Zigbee products per channel.
- MY button saves a favorite position for quick and easy access.
- Directly pair programmed motors without a TaHoma switch.



Main functions



Easy-to-use



MY function

NAME	TECHNOLOGY	ITEM NUMBER
YSIA 5 VARIATION ZIGBEE	ZIGBEE	1871281

DecoFlex WireFree™ Zigbee





The DecoFlex WireFree Zigbee keypad is the perfect blend of simplicity and elegance for controlling Somfy-powered Zigbee products.

Comfort & convenience

- Operates Zigbee window coverings and Smart Plugs
- Control one individual or one group of motorized Zigbee products per channel
- MY button saves a favorite position for quick and easy access
- Available in surface-mount and in-wall options to seamlessly integrate into home interiors.



Main functions



Easy-to-use



MY function



EM NUMBER
1871573
1871577
1871572
1871576
1



Zigbee® Smart Plug

The Somfy Smart Plug can be used in Zigbee® installations (using the TaHoma® switch). It extends the Zigbee radio range for motorized window coverings and turns connected lighting devices on/off. The Smart Plug is an essential point to building a robust Zigbee mesh network, and allows users to control traditional lighting or small plug-in devices with the TaHoma® app.

Comfort & convenience

- Discreet and easy to use.
- Enables control of lighting and other small home devices via your smartphone.
- Supports and communicates information between Zigbee devices.
- Compatible with voice assistants.









NAME	INPUT VOLTAGE	TECHNOLOGY	ITEM NUMBER
SMART PLUG ZIGBEE	120V AC 60HZ	ZIGBEE	1871217

Zigbee® Motor Receiver

Modernize your current installation to remotely control a 4-wire motor.

Connectivity Made Easy

- Transforms a wired shade into one that is smart and connected.
- No settngs needed, will auto-calibrate.
- Over-the-air updates.
- Expands the Zigbee mesh network for smart shading applications.
- · Offers local control using a wall switch.



Main functions



Position feedback



MY function



R Acts as Zigbee router Mesh network





Scalable

NAME	INPUT VOLTAGE	TECHNOLOGY	ITEM NUMBER
IZYMO™ MOTOR RECEIVER ZIGBEE	90-240V AC 50-60HZ	ZIGBEE	1871259

Zigbee® Lighting Receiver



Modernize your current installation to remotely control your lighting.

Connectivity Made Easy

- On/off control for lighting and small appliances.
- Seamless integration with the TaHoma switch.
- Zigbee router.
- Features two channels to control two individual devices, or two groups of
- Expands Zigbee mesh network for smart shading applications.
- Offers local control using a wall switch.



Main functions






MY function







Scalable



NAME	INPUT VOLTAGE	TECHNOLOGY	ITEM NUMBER
IZYMO™ LIGHTING RECEIVER ZIGBEE	90-240V AC 50-60HZ	ZIGBEE	1871260





Wireless Radio Technology Somfy® (RTS) Controls Situo® RTS Transmitters



Situo hand-held remotes control one individual window covering or one group of window coverings. Its modern finish complements any décor.

Comfort & Convenience

- · Ideal to manage natural light.
- Instantly block glare or create instant privacy with a simple button press.
- Includes a discreet wall holder.

Radio Technology Somfy

- Compatible with all RTS-powered systems, controls, and accessories so users can mix and match options to maximize product performance.
- Exclusive Somfy "my" feature saves a favorite/preferred product position.
- RTS is omni-directional, so no need to aim the remote at the product being controlled.



Main functions

Scalable





MY function





Customizable



Easy integration

NAME	TECHNOLOGY	ITEM NUMBER
SITUO® 1 RTS PURE II	RTS 433 MHZ	1870571
SITUO® 1 RTS IRON II	RTS 433 MHZ	1870572
SITUO® 1 RTS NATURAL II	RTS 433 MHZ	1870573
SITUO® 1 RTS ARCTIC II	RTS 433 MHZ	1870574
SITUO® 5 RTS PURE II	RTS 433 MHZ	1870575
SITUO® 5 RTS IRON II	RTS 433 MHZ	1870576
SITUO® 5 RTS NATURAL II	RTS 433 MHZ	1870577
SITUO® 5 RTS ARCTIC II	RTS 433 MHZ	1870578

Situo® Variation RTS Transmitter





The Situo Variation is a five-channel hand-held remote featuring precision control using a scroll wheel to incrementally tilt blind slats and sheer vanes, and to adjust RTS LED lights. Control five individual window coverings or five groups of window coverings. Its modern, pure white finish complements any décor.

Comfort & Convenience

- · Ideal to manage natural light.
- Instantly block glare or create instant privacy with a simple button press.
- Includes a discreet wall holder.

Radio Technology Somfy

- Compatible with all RTS-powered systems, controls, and accessories so users can mix and match options to maximize product performance.
- Exclusive Somfy "my" feature saves a favorite/preferred product position.
- RTS is omni-directional, so no need to aim the remote at the product being controlled.



Main functions



Easy-to-use



MY function



Time-saving









NAME	TECHNOLOGY	ITEM NUMBER
SITUO® 5 VARIATION RTS PURE II	RTS 433 MHZ	1811612





Situo[®] Soliris RTS Transmitter



The Situo Soliris is a five-channel hand-held remote with sun control to operate five individual or five groups of window coverings. Ideal to manage sun applications, reduces heat gain by activating the sun sensor to automatically adjust motorized products based on the sun's intensity. Its modern, pure finish compliments any decor.

Comfort & Convenience

- Operates motorized awnings, exterior screens, and rolling shutters to manage natural light.
- Instantly block glare or create privacy with a simple button press.
- Includes a discreet wall holder.

Radio Technology Somfy

- Compatible with all RTS-powered systems, controls, and accessories so users can mix and match options to maximize product performance.
- Exclusive Somfy "my" feature saves a favorite/preferred product position.
- RTS is omni-directional, so no need to aim the remote at the product being controlled.



Main functions



Easy-to-use



MY function



Time-saving







NAME	TECHNOLOGY	ITEM NUMBER
SITUO® 5 SOLIRIS RTS PURE II	RTS 433 MHZ	1870579

Wireless Radio Technology Somfy® (RTS) Controls Telis Patio Transmitters



The Telis 1 Patio is ideal for controlling outdoor motorized products. This singlechannel hand-held remote provides control of either one individual motorized application or one group of motorized applications. Offered in a fun blue and white finish, this control is both water and shock resistant.

Provide the Perfect Control

- Control one individual or one group of motorized products.
- Compatibility with full range of Radio Technology Somfy® (RTS) controls and
- Allows operation of motorized applications.

Perfect for Outdoor Applications

- Provides water and shock resistance.
- Blue and white finish is ideal for outdoors.



Main functions





MY function



Time-saving





Easy integration

т,	Scalable

NAME	TECHNOLOGY	ITEM NUMBER
TELIS 1 RTS PATIO TRANSMITTER	RTS 433 MHZ	1810643
TELIS 4 RTS PATIO TRANSMITTER	RTS 433 MHZ	1810645



Wireless Radio Technology Somfy® (RTS) Controls Telis 16 Transmitters



The Telis 16 RTS hand-held remote extends control of motorized interior and exterior products to 16 different channels of control.

Extend Control

- Control motorized products or groups of motorized products on up to 16 channels.
- Clear design with an easy-to-use on-screen display.

Provide Personalized Control

- More channels provide opportunities for greater personalization for clients.
- The "my" button allows to set a favorite position for an individual or a group of motorized applications for quick and easy access.
- Simple programming makes it easy to offer control of more motorized products.



Main functions

Scalable



Easy-to-use



MY function







Easy integration

NAME	TECHNOLOGY	ITEM NUMBER
TELIS 16 RTS PURE	RTS 433 MHZ	1811081
TELIS 16 RTS SILVER	RTS 433 MHZ	1811082

Telis Timer Transmitter



The Telis 1 Chronis RTS combines the functionality of a single channel hand-held control with the convenience of a programmable timer. This control option is compatible with all motorized Radio Technology Somfy® applications and offers simple programming and easy operation.

Easy Programming


- Easily program or change the automatic operation of motorized applications with a brief button press.
- Schedule one open and one close function per day with different scheduled operation available for weekends and weekdays.
- Default time programmed in the factory (7:30am UP, 8:00pm DOWN).

Offer Choice

- Operate shades in manual mode at any time according to preferences.
- Override programmed operation at any time.

Fits into any Lifestyle

- Easy to use hand-held transmitter with available wall mount clip.
- Compatible with all motorized shades, blinds, drapes, rolling shutters, and awnings featuring Radio Technology Somfy® RTS.



Main functions
















NAME	TECHNOLOGY	ITEM NUMBER
TELIS 1 CHRONIS PURE	RTS 433 MHZ	1805237





Wireless Radio Technology Somfy® (RTS) Controls DecoFlex WireFree™ Surface RTS



The DecoFlex WireFree™ Surface keypad provides homeowners a simple and elegant way to control their Somfy-powered RTS shading. With a slim profile, surface-mount capability and IP54 rating, it is ideal for interior and exterior applications.

Elegant Design

• A slim floating design that enhances aesthetics for any space.

Easy-to-install

- Battery-powered device that offers the ultimate flexibility.
- Mounting frame and snap-on cover enables quick installation.

Adaptive Control

• Can be paired with an individual motorized shade or groups of shades.



Main functions



Easy-to-use



Time-saving









Outdoor rated

	WHITE
NAME	ITEM NUMBER
DECOFLEX WIREFREE™ SURFACE RTS 5 CHANNEL	1871025

DecoFlex WireFree™ Surface Accessories

NAME	ITEM NUMBER	
DecoFlex WireFree™ Surface In-Wall Adaptor	9028644	



DecoFlex WireFree™ RTS Wall Switches

This DecoFlex WireFree™ is a one channel wall switch that is battery-powered and completely wireless.

No Wires Needed

• Battery-powered and completely wireless.

Flexible Control

- Can control an individual motorized application or groups of motorized applications.
- Ideal next to an existing light switch for control when entering/exiting a room.



Main functions



Easy-to-use

Outdoor rated



Time-saving



Customizable



Easy integration



Scalable

	WHITE	IVORY	BLACK
NAME	ITEM NUMBER	ITEM NUMBER	ITEM NUMBER
DECOFLEX WIREFREE™ RTS 1 CHANNEL	1810897	1810898	1810899
DECOFLEX WIREFREE™ RTS 2 CHANNEL (KIT)	1811068	1811069	1811067
DECOFLEX WIREFREE™ RTS 3 CHANNEL (KIT)	1811071	1811072	1811070
DECOFLEX WIREFREE™ RTS 4 CHANNEL (KIT)	1811074	1811075	1811073
DECOFLEX WIREFREE™ RTS 5 CHANNEL	1810813	1810814	1810830





Wireless Radio Technology Somfy® (RTS) Controls DecoFlex WireFree™ 3-Button RTS



The DecoFlex WireFree™ 3-Button keypad provides a simple and elegant way to control Somfy-powered RTS interior shades. This keypad is compatible with all Somfy RTS motors and brings an intuitive single channel control experience to the DecoFlex WireFree product line.

No Wires Needed

• Battery-powered and completely wireless.

Flexible Control

- Can control an individual motorized application or a single group of motorized
- Ideal next to an existing light switch for control when entering/exiting a room.



Main functions



Easy-to-use



Time-saving



Customizable



Easy integration



Scalable



Outdoor rated

	WHITE
NAME	ITEM NUMBER
DECOFLEX WIREFREE™ 3-BUTTON RTS	1870908

DecoFlex WireFree™ Accessories

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Decoflex WireFree™ Table Top Accessory (Silver)	1810972	P	DecoFlex WireFree™ Table Top Accessory (White)	1811185	
Decoflex WireFree™ Table Top Accessory (Black)	1811051	B			

DecoFlex WireFree™ Switch Plates

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
DecoFlex Switch Plate 4 Channel, White	9018977	Ë	DecoFlex Switch Plate 3 Channel, White	9018978	Ë

DecoFlex WireFree™ Switch Plates

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
DecoFlex Switch Plate 2 Channel, White	9018979		DecoFlex Switch Plate 4 Channel, Black	9018983	₫
DecoFlex Switch Plate 4 Channel, Ivory	9018980	Ë	DecoFlex Switch Plate 3 Channel, Black	9018984	
DecoFlex Switch Plate 3 Channel, Ivory	9018981		DecoFlex Switch Plate 2 Channel, Black	9018985	
DecoFlex Switch Plate 2 Channel, Ivory	9018982				

DecoFlex WireFree™ Engraved Buttons

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
DecoFlex Command Button Left "CLOSE," White	9016568	CLOSE	DecoFlex Command Button Left "DOWN ARROW," Black	9018933	7
DecoFlex Command Button Left "CLOSE," lvory	9016569	CLOSE	DecoFlex Command Button Right "UP ARROW," White	9018935	A
DecoFlex Command Button Left "CLOSE," Black	9016570	CLOSE	DecoFlex Command Button Right "UP ARROW," Ivory	9018936	
DecoFlex Command Button Right "OPEN," White	9016571	OPEN	DecoFlex Command Button Right "UP ARROW," Black	9018937	N.
DecoFlex Command Button Right "OPEN," lvory	9016572	OPEN	DecoFlex Command Button Large "STOP," White	9018939	OP
DecoFlex Command Button Right "OPEN," Black	9016573	OPEN	DecoFlex Command Button Large "STOP," lvory	9018940 ST	ОР
DecoFlex Command Button Left "DOWN ARROW," White	9018931	•	DecoFlex Command Button Large "STOP," Black	9018941 ST	OP
DecoFlex Command Button Left "DOWN ARROW," Ivory	9018932	•			



DecoFlex WireFree™ Printed Buttons

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
DecoFlex Button, Large, White, "KITCHEN"	9016400	HISCHEN	DecoFlex Button, Large, Ivory, "ALL"	9016467	ALL
DecoFlex Button, Large, White, "DINING RM"	9016415	DININGRM	DecoFlex Button, Large, White, "SHEER"	9016502	SHEER
DecoFlex Button, Large, White, "LIVING RM"	9016421	LIVING RM	DecoFlex Button, Large, White, "SHADE 1"	9016520	SHADE 1
DecoFlex Button, Large, White, "SHADES"	9016445	SHADES	DecoFlex Button, Large, White, "SHADE 2"	9016523	SHADE 3
DecoFlex Button, Large, White, "DRAPERY"	9016448	DRAPERY	DecoFlex Button, Large, White, "SHADE 3"	9016526	SHADE 3
DecoFlex Button, Large, White, "BLACKOUT"	9016457	BLACKOUT	DecoFlex Button, Large, White, "SHADE 4"	9016529	SHADE 4
DecoFlex Button, Large, White, "ALL"	9016466	ALL			

DecoFlex WireFree™ Blank Buttons

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
DecoFlex Custom Engraved Large Channel Button (White)	9018259	DecoFlex Custom Small Left Command Button (Black)	9018265	
DecoFlex Custom Engraved Large Channel Button (Ivory)	9018260	DecoFlex Custom Small Right Command Button (White)	9018267	
DecoFlex Custom Engraved Large Channel Button (Black)	9018261	DecoFlex Custom Small Right Command Button (Ivory)	9018268	
DecoFlex Custom Small Left Command Button (White)	9018263	DecoFlex Custom Small Right Command Button (Black)	9018269	
DecoFlex Custom Small Left Command Button (Ivory)	9018264			

Smoove® Wireless Wall Switches



The Smoove® RTS surface-mounted wall switch avoids cutting into drywall. This single channel, battery-operated solution is easy to install and doesn't require an electrician. Compatible with seven decorative color frames (sold separately), users can easily complement any décor.

1-4 Channel Versions

• Each channel can control an individual motorized product or a group of motorized products for practical and flexible control options.

Easy to Install

• Surface-mounted wall switch installs in minutes without an electrician and without cutting into the drywall.

Fits Every Style

- Offers an intutive, modern design to fit any home.
- Available in seven compatible frames in decorative colors, sold separately.



Main functions



Easy-to-use



MY function



Time-saving





Easy integration



NAME	TECHNOLOGY	ITEM NUMBER
SMOOVE® 1 RTS PURE II	RTS 433 MHZ	1871361
SMOOVE® 4 RTS PURE II	RTS 433 MHZ	1871381

Smoove® Frames

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
Smoove® Frame, Pure	9015022	Smoove® Frame, Silver Matte	9015025	
Smoove® Frame, Black	9015023	Smoove® Double Frame, Pure	9015238	

Smoove® Custom Engraved Switches

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
Smoove® 1 Custom Engraved Switch	1871191	Smoove® 4 Custom Engraved Switch	1871192	



Smoove® Custom Engraved Frames

NAME	ITEM NUMBER	
Smoove® Custom Engraved Single Frame	9027376	

NAME	ITEM NUMBER	
Smoove® Custom Engraved Dual Frame	9027377	Y

Radio Technology Somfy® (RTS) Repeater

NAME	ITEM NUMBER	
RTS Repeater	1810791	

Radio Technology Somfy® (RTS) Receivers

NAME	ITEM NUMBER	
Universal RTS Receiver (For 110V AC Motors)	1810627	33
Outdoor RTS Lighting Receiver (500 W)	1810875	573 191

NAME	ITEM NUMBER	
External Mount RTS 25 Receiver	1870137	

Wireless Radio Technology Somfy® (RTS) Controls RTS LED Receivers & Cables



The RTS 24V Dimming LED Control makes it easy to add lighting to RTS motorized awnings.

Convenient

- · Convenient solution for adding LED lighting to Somfy motorized awnings.
- Operate and adjust the lights with the same control as the awning.
- Smartphone and Tablet app compatible via TaHoma for quick and easy control.
- Allows for 12 levels of brightness and features the Somfy "my" position to set a preferred lighting level.
- Situo 5 Variation RTS recommended for precise 12-step dimming control.
- Simplify wiring using 500 series RTS motors equipped with fast connectors, such as Sunea.

Easy Installation

- A plug and play kit that installs quickly and easily without the need for an electrician.
- Available as a turn-key kit including a receiver and 4 customizable LED light bars that suit any lighting requirement.
- LED bars available in warm or cool white can be mounted on top of the awning arms for ambient or muted light, or face down for stronger light.

Compatibility

- Compatible with full range of RTS fast connector motors and controls.
- · Ideal for new or existing installations.
- Compatible with 24V LEDs using 5.5x2.5mm barrel connectors.

Main functions



Time-saving



Dimming



Outdoor rated



Easy-to-use



MY function

NAME	INPUT VOLTAGE	TECHNOLOGY	ITEM NUMBER
RTS 24V DIMMING LED CONTROL WHITE	90-240V AC 50-60HZ	RTS 433 MHZ	2320001

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
LED Adaptor Cable (5.5mm Barrel to JST)	2320023	6	2-Pole Extension Cable (5m/M+F)	9028729	N.
2-Pole Splitter Cable (160+20+20cm/M+F+F)	2320027	W.	2-Pole Extension Cable (3m/M+F)	9028731	6.
2-Pole Extension Cable (7m/M+F)	2320028		2-Pole Splitter Cable (20+20+20cm/M+F+F)	9028733	
2-Pole Extension Cable (1.5m/M+F)	2320029	J			



Wireless Radio Technology Somfy® (RTS) Controls Integration Controls



The URTSI II allows third-party automation systems to control Radio Technology Somfy® (RTS) motorized solutions. This 16 channel interface converts RS232 and RS485 protocols into RTS commands to control Somfy-powered solutions.

Integration Features

- Communicates with RS232, RS485, and IR.
- 16 channels of RTS control per URTSI.
- Control up to 16 URTSIs together for up to 256 channels.

Compatibility

• Compatible with all RTS motors and receivers.



Main functions



Time-saving



Outdoor rated





Easy integration



Scalable Scalable



NAME	TECHNOLOGY	ITEM NUMBER
UNIVERSAL RTS INTERFACE II (URTSI II-16 CHANNEL)	RTS 433 MHZ	1810872

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
RTS Dry Contact Interface (Single Channel)	1810493	54	IR Sensor (Miniature) with 3 ft. Cable with Connector for URTSI II	9015078	O
DB9 to RJ45 Adaptor for RS232 (For Use with URTSI)	9015028	Sign of the second			

Mounting Hardware

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
Situo® II RTS Mounting Bracket	9028048	Situo® II Variation Mounting Bracket	9028049	

Miscellaneous RTS

NAME	ITEM NUMBER	
Headrail Mount RTS 25 Receiver (Modulis Tilt Compatible)	1870142	1

LED Lighting



Easy Installation

- Plug and play kit installs quickly and easily without the need for an electrician and is ideal for existing or new installations.
- Available as a turn key kit, including a receiver and 4 LED light bars, or customizable to suit any lighting needs.
- LED bars available in warm or cool white can be mounted on top of the awning arms for ambiant muted light, or facing down for stronger light, depending on preference.


Compatibility

- Compatible with full range of RTS motors, controls, and accessories.
- · Ideal for new or existing installations.

Kit Includes:

- 1 x Dimming LED RTS receiver.
- 1 x 5 ft. interconnect cable.
- 1 x 25 ft. interconnect cable.
- 4 x LED bar 12V DC with adhesive tape in warm white or cool white.

Main functions





Time-saving



Dimming







Outdoor rated







NAME	INPUT VOLTAGE	TECHNOLOGY	ITEM NUMBER
LED 12V LIGHT CONTROL AWNING KIT WARM WHITE (X4 STRIPS)	120V AC 60HZ	RTS 433 MHZ	1811491
LED 12V LIGHT CONTROL AWNING KIT COOL WHITE (X4 STRIPS)	120V AC 60HZ	RTS 433 MHZ	1811506

NAME	AME ITEM NUMBER		NAME	ITEM NUMBER	
Dimming LED RTS 12V Receiver	1870607		Low Voltage LED Extension Cable 0.5 ft.	9019955	1
2-Pole White Plug with Screws for 12V DC LEDs	9019954	0	Low Voltage LED Extension Cable 5 ft.	9019956	9









Wireless Radio Technology Somfy® (RTS) Controls LED Lighting

NAME ITEM NUMBER		NAME ITEM NUMBER			
LED Light Bar 12V DC Warm White	9019958		Low Voltage LED Strips Interconnect 5 ft.	9019977	18,
LED Light Bar 12V DC Cool White	9019959		LED Light Splitter (1 Female To 2 Male Connector)	9020276	53
Low Voltage LED Extension Cable 25 ft.	9019976				

Pergola Controls

Radio Technology Somfy® (RTS) Receivers

Receivers add RTS control to two pergola tilt motors to seamlessly integrate with RTS transmitters, sensors, home automation interfaces, and smart phone apps.

Highlights

- Supports 12V or 24V DC.
- Built-in and remote antenna options ensure reliable radio reception.
- Compatible with RTS controls, sensors (Eolis 24V, Ondeis® 24V, Ondeis® WireFree, Sunis Outdoor WireFree™ RTS), and accessories (LED light kit).
- Select open or close in high winds with adjustable 12 to 60mph wind trigger from wind sensor built-in temperature sensor
- Rain sensor available in wired and solar-powered wirefree versions
- Wirefree sun sensor
- Supports motors with and without encoders.
- Full and semi-automatic limit setting (allows installer to set one limit to control stroke length).
- · Consistent, simple, reliable RTS programming.
- Includes overload and over current protection.
- Obstacle detection protects objects & investments
- Users can set a favorite intermediate "my" position.

Main functions



Outdoor rated



Easy-to-use



MY function

NAME	INPUT VOLTAGE	TECHNOLOGY	ITEM NUMBER
PERGOLA 12V/24V 2-MOTOR RTS RECEIVER & ANTENNA KIT	24V DC	RTS 433 MHZ	1870488
LED RTS 24V DC RECEIVER	24V DC	RTS 433 MHZ	1870872
PERGOLA 12V/24V 2-MOTOR RTS RECEIVER	24V DC	RTS 433 MHZ	1871434





Wireless Infrared Controls

IR Transmitters

NAME	ITEM NUMBER	
1-99 Channel IR Transmitter	1810498	Tree of
IR 8 (8 Channel) IR Transmitter	1870132	

NAME	ITEM NUMBER	
IR 1 (1 Channel) IR Transmitter	1870133	1

Drapery Integration

Zigbee®

NAME	ITEM NUMBER	
Zigbee (2-Way) Module for Glydea® ULTRA Motors	9000043	1

Somfy Digital Network[™] (SDN) Drapery Modules

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
RS485 (SDN) Module for Irismo™ Motors (Irismo DCT TO RS485)	1811129		RS485 (SDN, 2-Way) Module for Glydea® ULTRA Motors	1871412	THE RESERVE TO SERVE
RS485 (SDN) Module for Irismo™ Enclosure Kit (with Drapery Cable)	1870282	·			



Drapery Integration

Z-Wave®



The Z-Wave Module allows communication between Somfy's drapery motors and Zigbee controls. It receives Z-Wave transmissions and converts them to motor control commands. They've never been easier to integrate in third-party automation systems!

Integration Features

- Receives Z-Wave® transmissions and converts them to motor control commands.
- · Join a network with one button press.
- Connects directly to the motor for power.
- One interface per motor.

Connectivity

- RJ12 Modular cable for communication.
- Setup button easily identifies the module in the Z-Wave network.

Compatibility

- · Compatible with Glydea® DCT motors.
- Compatible with Irismo™ DCT motors.

Main functions



Easy integration



 $Mesh\,network$



Easy-to-use



Time-saving







Customizable



Outdoor rated

INPUT VOLTAGE	TECHNOLOGY	ITEM NUMBER
24V DC	Z-WAVE	1870228
24V DC	Z-WAVE	1870280
	24V DC	24V DC Z-WAVE

Common Drapery Components

NAME	ITEM NUMBER
Empty Irismo™ 24V Mini DC Control Enclosure Kit	9021132

Digital Intelligent Building Controls Integration Controls: UAI+

The Somfy Connect™ Universal Automation Interface (UAI) Plus allows for commissioning and integrating Somfy Digital Network™ (SDN) over IP.

User Friendly

- Setup wizard for commissioning (programming).
- · Drag and drop grouping.
- Firmware updates over IP.
- Available reports can be printed or emailed.
- Configuration file can be backed up.

Integration features

- Commission and integrate up to 250 motors over IP.
- Embedded programming software.
- No pinouts.
- · No converters.

Connectivity

- Compatible with Control4, Crestron, and Savant automation systems.
- Compatible with Somfy Synergy™ API.
- Compatible with SDN 2.0.

Compatibility

- Compatible with Sonesse 30 RS485.
- Compatible with Sonesse 50 ULTRA AC & DC RS485.
- Compatible with Glydea ULTRA.
- Compatible with Irismo 35 with SDN Enclosure Kit.

Main functions



Open protocol



Outdoor rated

Easy integration





Time-saving





NAME	INPUT VOLTAGE	TECHNOLOGY	ITEM NUMBER
SOMFY CONNECT™ UNIVERSAL AUTOMATION INTERFACE (UAI) PLUS	24V DC	RS485	1870272



Digital Intelligent Building Controls Integration Controls: 0-10V Interfaces



The SDN 0-10V Interface is a device which accepts the lighting industry standard 0-10V analog dimming signal and converts it to an SDN or animeo® IP command to drive a single or a group of motors. The control is housed in a junction-boxmountable, plenum-rated enclosure and powered by line voltage. There is a single RJ45 jack on the device which provides the connection to the SDN bus via a standard CAT-5 cable.

Occupant Experience

- Simplified user interaction for controlling natural and artificial lighting.
- Coordinated control with lighting controls via schedules and scenes.

Building Performance

- Enables large scale deployments with integration to BMS and security systems.
- Flexibility to add animeo IP for advanced scheduling and sun tracking capability.

Ease of Installation

- Powered by line voltage to eliminate the need for local power drops for outlets.
- Plenum-rated enclosure that can be installed in J-box along with a lighting control
- Onboard DIP switches streamline system configurations and speed up deployment.



Main functions



Easy integration



Time-saving



Easy-to-use



Customizable

NAME	INPUT VOLTAGE	TECHNOLOGY	ITEM NUMBER
SDN 0-10V INTERFACE V2	120V AC 60HZ	RS485	1870857

Digital Intelligent Building Controls Integration Controls





The Somfy Connect BMS Interface V2 for Somfy Digital Network™ (SDN) provides communication between Building Management Systems and Somfy motorized shading systems, either stand-alone SDN or SDN with an animeo IP shade systems.

Integration Features

• Integrates with Modbus, BACnet MS/TP, and BACnet IP.

System Control Features

- · animeo IP
- Control individual or motor groups, sensors, and virtual keypads.
- Types of control include position (%), up/stop/and down commands, priority control, and sensor data.
- · Virtual Keypads
- · Control individual or motor groups.
- Types of control include position (absolute), up/stop/and down commands, and intermediate positions.
- Stand-alone SDN
- · Control individual or motor groups.
- Types of control include position (absolute), up/stop/and down commands, and intermediate positions.

Trouble-Free Setup

- Supports up to 4500 device objects.
- Programmable through a user-friendly interface.
- The device is auto-discoverable when set up in animeo IP systems.

• Compatible with Sonesse 30 & 50 AC RS485 motors, and animeo IP systems.

Main functions





Open protocol



Customizable



Easy integration



Easy-to-use

NAME	INPUT VOLTAGE	TECHNOLOGY	ITEM NUMBER
SOMFY CONNECT™ BMS INTERFACE V2	24V DC	RS485	1871168

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
RS232 to RS485 Converter for SDN	1810496	AP.	Sonesse® 50 Adaptor Cable for ZBDMI	9019996	000
Control4 to Digital Motor Interface	1870533		ZBDMI Data & Power Cable	9027112	
DB9 to RJ45 Adaptor for RS485 (For Use with URTSI, UAI+ and SDN)	9015029				



Digital Intelligent Building Controls Power over Ethernet (PoE) Gateway

The SDN Power over Ethernet (PoE) Gateway is a low-voltage power distribution and network-connected module that utilizes PoE technology to power and control Somfy 24V RS485 shade and drapery motors.

Highlights

- Delivers up to 51W of power and ethernet-based connectivity.
- Supports both Somfy Synergy™ API and CoAP Digital Building API compatible with Molex Transcend Network Connected System.
- Powered and connected via standard Cat 5e/6 UTP cable and controls Somfy Digital Network™ (SDN) devices.
- Control up to 4 Low-voltage RS485 motors from an SDN PoE Gateway.
- When operating motors in a group, motors will cascade individually.
- Aligned operation available with Sonesse® 30 RS485 DC (maximum 2 motors).
- Total wiring between SDN PoE Gateway and all motors should not exceed 240 ft. when using SDN Low-Voltage Motor Cable.
- Gateway connects to SDN Low-Voltage Motor Cable using a 4 pin to Weidmueller adaptor cable (included with the Somfy PoE Gateway Kit 1870445).

- Compatible with Molex Transcend Control System, distributes power and data to shade and drapery motors.
- IEEE 802.3bt and Cisco UPoE Compliant Device.
- Ability to program up to 16 intermediate positions per motor.
- Offers a control for groups of motors with stop and align command.
- Compatible with Somfy Synergy[™] API.

Connectivity

- Capable of powering a single or multiple motors.
- Easy to connect/disconnect RJ45 and 4 pin ports with adaptor cable included.
- Supports both ANSI/TIA/EIA 568 A & B Standards.
- Safe operation and industry-standard compliance (UL 2108/ UL 1310).
- Not allowed to be on the same subnet as Molex Gateways.

Motor Compatibility (24V DC RS485 only)

• Compatible with Sonesse 30 RS485 DC, Sonesse 50 Ultra DC RS485, and Irismo 35 DC RS485.

Main functions



Customizable

Outdoor rated





Open protocol



Time-saving



Easy-to-use

NAME	INPUT VOLTAGE	TECHNOLOGY	ITEM NUMBER
SDN POWER OVER ETHERNET (POE) GATEWAY	48V DC	POE	1860326
SDN POWER OVER ETHERNET (POE) KIT (GATEWAY AND 9025010 ADAPTOR)	48V DC	POE	1870445





Digital Intelligent Building Controls Power over Ethernet (PoE) Gateway

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Motor Daisy-Chain Adaptor for SDN Power over Ethernet (PoE) Gateway	9020451		Power over Ethernet (PoE) Gateway to Motor/animeo® Keypad Adaptor (Plenum- Rated)	9025011	-60
Power over Ethernet (PoE) Gateway to Motor Adaptor	9025010	•	Drapery Adaptor for Power over Ethernet (PoE) Gateway	9025012	-39



Digital Intelligent Building Controls Power over Ethernet (PoE) Room Controllers

The PoE Touch Panel Room Controllers are touch screen interfaces that send commands, receive position status, and allow the grouping of SDN motors connected to POE Gateways. These products utilize native PoE technology to power and control the Somfy 24V RS485 motors.

Operation Features

- Control up to 20 Gateways, individually or as groups, for ideal room control.
- Provides dedicated control for the Power Over Ethernet (PoE) network for motorized shading and drapery.
- Offers group control of multiple gateways with common up, stop, down, and percentage commands.
- Ability to program up to 6 intermediate positions per motor or groups of motors or gateways.
- Includes a Proximity Sensor allowing the product to wake up when motion is detected.

User Experience

- In-wall touch panel offers a robust, hi-res color display dedicated to control SDN (Somfy Digital Network™) motorized shading connected to PoE Gateways.
- Intuitive two-way communication provides position status feedback with network access.
- Offers multiple display settings, including a screen saver upload, to customize the user experience.

Connectivity

- Connected via standard Cat 5e/6 UTP cable with a max. distance of 328 ft. between PoE Touch Panel Room Controller and network switch for reliability.
- Easy to connect/disconnect RJ45 port supporting both ANSI/TIA/EIA 568 A & B Standards
- Includes Micro USB port for additional functionality including file transfers to and from the device.
- Safe operation and industry-standard compliance (UL Certified, CE, RoHS/WEEE & FCC Class B).

Product Compatibility

- Installs in standard single-gang wall boxes US, UK, European/International IEC/ EN60670
- IEEE 802.3af Compliant Device allowing for use with industry standard IEEE 802.3 af PoE Network Switches.
- Requires Somfy Power over Ethernet Gateways for use.

Main functions













Easy-to-use

NAME	INPUT VOLTAGE	TECHNOLOGY	ITEM NUMBER
POE TOUCH PANEL ROOM CONTROLLER BLACK	48V DC	POE	1870731
POE TOUCH PANEL ROOM CONTROLLER WHITE	48V DC	POE	1870811







Digital Intelligent Building Controls

Somfy Digital Network[™] (SDN) PowerConnect[™] Surface-Mount Panel



The SDN PowerConnect Surface-Mount Panel is a Somfy Digital Network™ (SDN) bus distribution component used to add 10 isolated motor ports and two isolated device ports to an SDN bus segment.

Efficient Power and Data Distribution

- Isolated motor ports support up to 240 feet of power and data wiring to individual low-voltage intelligent motors.
- Used to add 10 isolated motor ports and two isolated device ports to an SDN bus segment.

Improved Design

- New mounting options add flexibility to installation.
- Smaller form factor approx. 50% smaller volume.
- Sequence button allows for testing of motor wiring directly at the power panel.
- System status LEDs monitor Bus power, communication, and end-of-line
- Supplies power to Device Ports from internal power supplies.
- Miswire protection.
- · Automatic segment termination.
- Replaces all previous motor power panels for SDN motors.

Simplified Installation

- The in-wall or on-wall mountable enclosure offers separated line- and lowvoltage areas for ease of installation.
- Front cover includes keyed lock handles.

Perfect for Multiple Applications

- Could be used in small SDN systems with two control devices and 10 individual motors as a stand alone solution.
- cULus

Main functions









Easy-to-use

NAME	TECHNOLOGY	ITEM NUMBER
SDN POWERCONNECT™ SURFACE-MOUNT PANEL	RS485	1871026



Digital Intelligent Building Controls

Somfy Digital Network™ (SDN) PowerConnect™ Rack-Mount Panels

An SDN bus distribution device used to add eight isolated motor ports and two isolated device ports to an SDN bus segment per panel.

Efficient Power and Data Distribution

- Supports up to 240 feet of power and data wiring to Somfy's range of lowvoltage SDN motors.
- Enables control of eight RS485 DC motors per panel.
- Provides power to SDN device ports from internal power supplies (add a bus power source when adding a Data Hub or other bus-powered device connected to the bus line).
- Two device ports isolated from the SDN bus.

Improved Design

- Single and dual kit options add flexibility to installation.
- Sequence button allows for testing of motor operation directly at the power
- Includes bus segment status LEDs for power, activity and end of line notification.
- Protects system components from mis-wire.

Main functions



NAME

Time-saving



Easy-to-use



Scalable

NAME	ITEM NUMBER

SDN PowerConnect™ Rack-Mount Panel, Dual Kit

SDN POWERCONNECT™ RACK-MOUNT PANEL

1871312



Somfy Digital Network™ (SDN) Bus Components

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Bus and Sensor Station Power Supply	1822440		SDN Data Hub V2	1870951	
Data Panel	1870260	-1	USB to RS485 Adaptor for SDN	9015260	
SDN Mini Data Hub	1870277	alalel	SDN Bus Booster	9027694	



ITEM NUMBER

1871027

Digital Intelligent Building Controls Somfy Digital Network™ (SDN) Push-Button Switches



Provides a hard-wired, in-wall user interface for stand-alone Somfy Digital Network™ shading systems.

Simple communication

- SDN keypads communicate directly with intelligent motors without a centralized controller.
- Distributes intelligence across the network to ensure ensuring reliable operation.
- Eight dry contact inputs (regardless of the number of buttons) which are programmed to output SDN commands.

Simple to use

- Compatible with Set pro by Somfy configuration software.
- Each button can be programmed with different commands for Press, Release, and Hold.
- Set an intermediate position at the current shade position via a simple button press.
- Keypad configurations can be exported and backed up.



Main functions





NAME	TECHNOLOGY	ITEM NUMBER
DECOFLEX SDN KEYPAD V2, 8-BUTTON, WHITE	RS485	1871472
DECOFLEX SDN KEYPAD V2, 6-BUTTON, WHITE	RS485	1871479
DECOFLEX SDN KEYPAD V2, 8-BUTTON, BLACK	RS485	1871494
DECOFLEX SDN KEYPAD V2, 6-BUTTON, BLACK	RS485	1871495
DECOFLEX SDN KEYPAD V2, 8-BUTTON, GROUP CONTROL, WHITE	RS485	1871496
DECOFLEX SDN KEYPAD V2, 6-BUTTON, GROUP CONTROL, WHITE	RS485	1871497

Somfy Digital Network™ (SDN) Receiver

NAME	ITEM NUMBER	
RTS Receiver for SDN V2	1871471	. D.



Digital Intelligent Building Controls

animeo® IP Building Controllers

The animeo IP Building Controller features a sophisticated graphical user interface and built-in software applications for managing scheduled events, sun tracking, and virtual web-based keypads. An animeo IP Building Controller is required for every animeo IP installation. For larger animeo IP systems (over 200 nodes), animeo IP Sub Controllers must be used.

Installation Advantages

- For larger installations, the IP Building Controller's capacity can be expanded with the addition of an animeo IP Sub Controller (Ref. 1860201).
- RJ45 and spring clamp connectors for false prove connections.
- Suitable for wall-mounting and DIN-rail installation.

Functional Advantages

• Features an intuitive graphical user interface to simplify programming, commissioning, operation, and system status.

Outdoor rated

- Automatic discovery of blinds, sensors, and local control points.
- No zone limitation, a window can be a single zone.
- Allows configuration and binding of customized web remotes.

Time-saving



Main functions









NAME	INPUT VOLTAGE	TECHNOLOGY	ITEM NUMBER
ANIMEO® IP BUILDING CONTROLLER	90-240V AC 50-60HZ	RS485	1822314
ANIMEO IP/RS485 SUBCO	90-240V AC 50-60HZ	RS485	1860201





Digital Intelligent Building Controls

animeo® IP Push-Button Switches



Maximize efficiency

- Users can adjust their personal comfort without compromising overall building efficiency.
- Advanced logic such as an energy efficient "Eco-mode" can override user-initiated keypad actions after a configurable time interval.
- Define critical times to override local demands to ensure efficient building operation.
- Receives power and data with a single connection.
- Auto-discoverable with animeo® IP Visual Configuration software keypad wizard.
- Intuitive drag-and-drop actions and preconfigured profiles make it easy to control entire facades, groups, or single motors.







Main functions



Easy-to-use



NAME	TECHNOLOGY	ITEM NUMBER
DECOFLEX ANIMEO® IP KEYPAD V2, 8-BUTTON, BLACK	RS485	1871490
DECOFLEX ANIMEO® IP KEYPAD V2, 8-BUTTON, WHITE	RS485	1871491
DECOFLEX ANIMEO® IP KEYPAD V2, 6-BUTTON, BLACK	RS485	1871492
DECOFLEX ANIMEO® IP KEYPAD V2, 6-BUTTON, WHITE	RS485	1871493

animeo® IP Receiver

NAME	ITEM NUMBER	
RTS Receiver for animeo® IP V2	1871498	S . D.

Power Supplies

NAME	ITEM NUMBER	
Power Supply DRM 24V DC 1.5A	9017611	

Power Protection

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Electronic Lightning Protection RS485	9025706	A PART	Electronic Lightning Protection Power Supply	9025707	



Push-Button Switches

NAME	ITEM NUMBER	
Single Push-Button Switch Station (White)	1810571	Total Control

NAME	ITEM NUMBER	
Decoflex Dry Contact Keypad	1811402	- 156 161

Paddle Switches

NAME	ITEM NUMBER	
Maintained Decorator/Designer Switch Single Pole (Ivory)	1800373	
Maintained Decorator/Designer Switch Single Pole (White)	1800374	1
Maintained Double Pole, Decorator/ Designer Switch (White)	1800375)

NAME	ITEM NUMBER	200
Maintained Double Pole, Decorator/ Designer Switch (Ivory)	1800376	
Momentary Decorator/Designer Switch, Single Pole (Ivory)	1800377	1
Momentary Decorator/Designer Paddle Switch (White)	1800378	Ĭ,

Toggle Switches

NAME	ITEM NUMBER	
Maintained Toggle Switch, Single Pole (Ivory)	1800380	
Maintained Toggle Switch, Single Pole (White)	1800381	Ě

NAME	ITEM NUMBER	
Momentary Toggle Switch, Single Pole (Ivory)	1800382	Ď
Momentary Toggle Switch, Single Pole (White)	1800383	N. C.

Rocker Switches

NAME	ITEM NUMBER	
Maintained Rocker Switch Kit with Standard Plate (Ivory)	1800341	· m
Maintained Rocker Switch Kit with Standard Plate (White)	1800342	
Momentary Rocker Switch Kit with Standard Plate (Ivory)	1800344	m

NAME	ITEM NUMBER	
Momentary Rocker Switch Kit with Standard Plate (White)	1800345	. [42] -
5 Position AC Decorator Rocker Switch with Tilting Control (White)	1800388	G

Key Switches

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Heavy Duty Maintained Indoor Key Switch (Ivory Switch Plate)	1800332	10	Heavy Duty Momentary Outdoor Key Switch (Flush Mount)	1800353	中
Heavy Duty Momentary Indoor Key Switch (Ivory Switch Plate)	1800333		Key Switch Cylinder	9012040	4
Heavy Duty Momentary Outdoor Key Switch (Surface Mount)	1800334	A 33	Light Duty Momentary Indoor Key Switch (Switch Plate Not Included)	9012155	W.
DP/DT Indoor Momentary Key Switch	1800348		Key Blanks for Outdoor Key Switches	9013169	Ť
DP/DT Maintained Key Switch	1800349	10			

Key Pads

NAME	ITEM NUMBER	
Outdoor Digital Keypad	1810527	



Group Motor Controllers



The Individual Group Control (IGC) 4n1 Motor Controller provides individual and group control for up to four Somfy Wired Technology (WT) motors with up to three intermediate positions per motor.

Features Summary

- Control up to four wired motors individually or in groups.
- Provides default intermediate positions: 25%, 50%, 75% openness.
- Users can access 3 preset positions as well as Up, Down, and Stop, and set custom intermediate positions.
- Multiple IGC 4n1 Motor Controllers can be daisy-chained together for simplified synchronized control from a single keypad.



Main functions



Time-saving



Easy-to-use



Easy integration





Customizable



Outdoor rated

NAME	INPUT VOLTAGE	TECHNOLOGY	ITEM NUMBER
IGC 4N1 MOTOR CONTROLLER (4 MOTORS)	120V AC 60HZ	WIRED	1811416
IGC 4N1 MOTOR CONTROLLER (SHUTTER MODE)	120V AC 60HZ	WIRED	1870902

NAME	ITEM NUMBER	
Group Control System II (GCS II)	1810476	

Synchronized Motor Controllers

NAME	ITEM NUMBER	NAME	ITEM NUMBER	
Synchronization (Momentary Output GCS Control)	1822159	Synchronization (Maintained Output) IGC Control	1822161	

Single Motor Controllers

NAME	ITEM NUMBER	
Single Motor Controller for Outdoor Digital Key Pad	1810513	

NAME	ITEM NUMBER
Isolation Control	1822135

Radio Receivers

NAME	ITEM NUMBER	
Synchronization Control RTS Radio Receiver	1810481	.
GCS II RTS Radio Receiver	1810854	(1).

ITEM NUMBER	
1811492	■ · D ·

Switch Plates

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Plastic Toggle Single Gang Switch Plate (Ivory)	9011962		Single Gang Paddle/Designer Switch Plate (White)	9011967	
Plastic Toggle Single Gang Switch Plate (White)	9011963	1	Two Gang Designer Switch Plate (Ivory)	9011968	
Single Gang Paddle/Designer Switch Plate (Ivory)	9011966		Two Gang Designer Switch Plate (White)	9011969	

Wired AC/DC Controls & Switches

Push-Button Switches

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Single Push-Button Switch with Screw Terminal (White)	1800406	Total Control of the	Dual Push-Button Switch Station with Screw Terminal (White)	1800407	



Multi-Link

1822183	
	1822183

NAME	ITEM NUMBER	
Multi Link 110V AC Snap Track Interface Control - 99 Channel	1822184	

IR Controls

NAME	ITEM NUMBER	
IR Sensor (Miniature) with 3 ft. of Flat Modular Cable w/RJ11 Connector	9012872	0

Electrical Enclosures

NAME	ITEM NUMBER	
Enclosure for Multi-LinkControl	9012062	0.

Wired DC Controls & Switches

Push-Button Switches



The Decora-style wall switch is compatible with Somfy's DCT motors.

Simple and Seamless

- Dry contacts for simplified open, close, and stop commands.
- Works seamlessly with Somfy DCT motor ranges.
- Decora style to blend with interior design.



Main functions









NAME	INPUT VOLTAGE	TECHNOLOGY	ITEM NUMBER
DRY CONTACT OPEN, CLOSE, STOP WALL SWITCH (WHITE)	12V DC	WIRED	1800219

Paddle Switches



Rocker Switches



NAME	ITEM NUMBER	
Standard DC Rocker Switch (Ivory)	1800372	H

Sensors



Convenient Comfort Wind, sun and rain sensors maximize product performance.



Touch-free Protection Rain or shine, outdoor sensors activate exterior products automatically.



Energy Savings Beat the heat of intense sunlight automatically.



RTS-compatible Wireless and easy to install for automated control.



Commercial Systems Multiple sensors for all weather conditions, used in combination, for total building efficiency.





Outdoor Wind Sensors

The Eolis 3D WireFree™ RTS Wind Sensor is a wireless, battery-powered wind sensor that will automatically retract an awning based on wind generated movements.

Easy Install

- · Completely wireless, battery operated.
- Recommended for existing or new awning installations.

Peace of Mind

• Exclusive patented technology to protect awnings against the wind by detecting horizontal, vertical, and lateral movement.

Radio Technology Somfy

• Compatible with all RTS-powered systems, controls, and accessories so users can mix and match options to maximize product performance.



Main functions



Outdoor rated



Time-saving



Easy-to-use



Easy integration



NAME	TECHNOLOGY	ITEM NUMBER
EOLIS 3D WIREFREE™ RTS WIND SENSOR (WHITE)	RTS 433 MHZ	1816081
EOLIS 3D WIREFREE™ RTS WIND SENSOR (BLACK)	RTS 433 MHZ	1816082
EOLIS 3D WIREFREE™ RTS WIND SENSOR (OFF-WHITE)	RTS 433 MHZ	1816083

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
Power Supply for Eolis & Soliris RTS Sensor	1822110		Self Drilling Screw Kit for Eolis 3D WireFree™ Sensor (40 Screws)	9014663	
Mounting Tab with Screws Kit for Eolis 3D WireFree™ Sensor	9014351	J.J.			





Outdoor 24V Wind Sensor

The Eolis RTS Wind Sensor automatically controls RTS motorized products based on current wind conditions.

Comfort & Convenience

- Automatically operates awnings or exterior screens when wind is detected.
- Kit includes sensor and power supply.

Peace of Mind

• State-of-the-art sensor automatically offers maximum energy savings and protects the application.



Main functions



Outdoor rated

Customizable



Time-saving



Easy-to-use



Easy integration



Scalable Scalable

NAME	TECHNOLOGY	ITEM NUMBER
EOLIS RTS WIND SENSOR 24V DC KIT (INCLUDES SENSOR AND TRANSFORMER)	RTS 433 MHZ	9012499

Outdoor 24V Sun & Wind Sensor



The Soliris RTS Sun and Wind Sensor automatically controls RTS motorized products based on current weather conditions.

Comfort & Convenience

· Automatically operates awnings or exterior screens when wind is detected or the sun's intensity increases.

Energy Savings

• Reduce energy consumption up to 40%.

Peace of Mind

• State-of-the-art sensor automatically offers maximum energy savings and protects the application.

Kit Includes:

• Kit includes sensor and power supply.



Main functions



Outdoor rated

Customizable



Time-saving



Easy-to-use



Easy integration



Scalable

NAME	TECHNOLOGY	ITEM NUMBER
SOLIRIS RTS SUN AND WIND SENSOR 24V DC KIT (INCLUDES SENSOR AND TRANSFOMER)	RTS 433 MHZ	9012500



Outdoor Rain & Sun Sensor



The Ondeis WireFree RTS Rain & Sun Sensor is a solar-powered combined rain and sun sensor compatible with RTS motorized exterior products, including awnings, rolling shutters, and screens. The Sensor is completely wireless and uses optical rain-sensing technology to measure rainfall, then sends an RTS command when rainfall exceeds the user-selected threshold. The Sensor also utilizes a sun-level sensor that sends an RTS command when sunlight exceeds the user-selected threshold.

Flexible and Easy to Install

- One channel communicates with one RTS motorized product or group of motorized products.
- Two-way mounting bracket allows for multiple mounting options flexible and simple installation on the wall, pole, or gutter, using provided hardware.
- Demo Mode reduces response time for testing.
- Potentiometer allows users to set threshold levels for rain and sun sensing and easily adjustable preferred settings.
- LED Indicators provide visual feedback of product functions with easy-to-see
- Mode Selector sets usage for an awning, exterior screen, or a rolling shutter.

Communication

- Sends a signal to the motor regularly to ensure a maintained connection.
- Operates even if the signal is lost, protecting the motorized application.

Main functions



Outdoor rated

Customizable



Time-saving



Easy-to-use



Easy integration



NAME	TECHNOLOGY	ITEM NUMBER
ONDEIS® WIREFREE RTS RAIN & SUN SENSOR	RTS 433 MHZ	9019617





Outdoor Sun Sensor

This battery-operated, outdoor sensor automatically adjusts Somfy powered exterior products based on the sun's intensity.

Compatibility

- · Compatible with RTS motors & receivers.
- A Situo Soliris is required to activate the sun function.

Effortless Comfort & Protection

- Provides effortless control so users can enjoy awnings, screens, or pergolas even more, automatically making patios more comfortable.
- Optimizes HVAC usage and keeps the home comfortable, allowing energy savings throughout the year.
- Prevents UV damage & protects interior furnishings by managing exterior shading solutions based on the sun's intensity.

Customized Solar Protection

• Choose from eight levels of sun threshold settings for a personalized experience.



Main functions



Outdoor rated

Customizable



Time-saving



Easy-to-use



Easy integration



Scalable

NAME	TECHNOLOGY	ITEM NUMBER
SUNIS OUTDOOR WIREFREE™ RTS SUN SENSOR	RTS 433 MHZ	9020412



Pergola Sensors

Pergola Sensors

The Eolis RTS Wind Sensor automatically retracts an awning based on windgenerated movements.

Comfort & Convenience

• Automatically operates pergolas, exterior screens, or rolling shutters when the wind is detected.

Peace of Mind

• State-of-the-art sensor automatically offers maximum energy savings and protects the application.



Main functions



Outdoor rated



Easy-to-use

NAME	TECHNOLOGY	ITEM NUMBER
EOLIS RTS 60 MPH WIND SENSOR 24V DC KIT	RTS 433 MHZ	1870709

Digital Intelligent Building Controls

animeo® Building Automation Sensors



Sensor boxes act as an interface between weather stations and building controllers. Measurement values are evaluated and sent to the building controller. It requires an external 24V AC/DC power supply.

Safe & Convenient

- Only two cables (power and data) lead to the outside.
- · Lightning protected for safety.
- Can be fixed to the Sensor Station mast.
- Operates up to 8 sun sensors, 2 wind sensors, 1 wind direction sensor, 1 rain sensor, and 1 outside temperature sensor.
- Easily connect a DCF plug module.



Main functions



Outdoor rated



Time-saving



Easy-to-use





Easy integration



NAME	INPUT VOLTAGE	TECHNOLOGY	ITEM NUMBER
OUTSIDE SENSOR BOX	24V DC	RS485	9001606
OUTSIDE SENSOR EXTENSION BOX	24V DC	RS485	9001607
INSIDE SENSOR BOX	120V AC 60HZ	RS485	9001615

NAME	ITEM NUMBER		NAME	ITEM NUMBER	
M-Series Weather Station Wall Bracket	1860320	H	Outside Temperature Sensor	9001611	
M-Series Weather Station Mast Adaptor	1860321	8	Housing for Inside Temperature Sensor	9008045	6
Metallic Mast	1860335		Sensor Station Mast	9013726	
Wall Mount Brackets for Mast	1860336	1	animeo IB+ Compact Sensor	9015047	
Large Wind Speed Sensor	9001608	100	Ondeis® Rain Sensor	9016344	6



Digital Intelligent Building Controls


animeo® Building Automation Sensors



NAME	ITEM NUMBER	
Sun Sensor with Bracket	9154043	

Wired AC Controls & Switches

Sun & Wind Controls & Sensors



NAME	ITEM NUMBER	0.00
Soliris Sensor (Combined Sun and Wind)	9101475	J. A.







About Somfy

For over 50 years, Somfy has been pioneering innovative motorization and automated solutions for window coverings and exterior shading products. With comfort, ease of use, security, and sustainability in mind, our seamless and connected solutions are designed to help people make the move to living spaces impactful for humans and with a reduced impact on nature.

A BRAND OF **SOMFY** GROUP

Content subject to change

Somfy Systems, Inc. T: (800) 22-SOMFY www.somfypro.com

New Jersey 121 Herrod Blvd. Dayton, NJ 08810 T: (609) 395-1300 F: (609) 395-1776 Florida 1200 SW 35th Ave. Boynton Beach, FL 33426 T: (561) 995-0335 F: (561) 995-7502 California 15301 Barranca Pkwy. Irvine, CA 92618-2201 T: (949) 727-3510 F: (949) 727-3775 Somfy ULC T: (800) 66-SOMFY www.somfypro.ca

Canada 6411 Edwards Blvd. Mississauga, ON L5T 2P7 T: (905) 564-6446 F: (905) 238-1491